

Proposed Label Copy for
KL-990 U.S.M.C.®
Amended for Restricted Use

Front Panel

RESTRICTED USE PESTICIDE


Restricted use pesticide due to toxicity to aquatic organisms including shellfish. For sale only to certified commercial applicators and for use by persons under the direct supervision of an on-site (at the work site) certified commercial applicator. These restrictions become effective on March 11, 1990.

Potent Anti Fouling Coating

U.S.M.C.®

By KL-990®

Heavy Duty

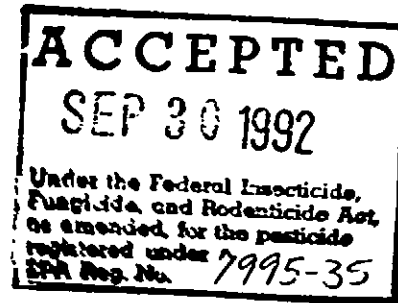

Active Ingredients	
Cuprous Oxide	47.60%
Bis (Tributyltin) Oxide	1.00
Inert Ingredients	51.40%
Total	100.00%

BEST AVAILABLE COPY

Contains Petroleum Distillates
DANGER
Keep Out of Reach of Children
See back panel for additional precautionary statements.
One U.S. Gallon
3.79 Liters

Back Panel - First Column

U.S.M.C.®

U.S.M.C. is a general purpose, heavy duty anti-fouling coating which contains a high amount of cuprous oxide and potent toxic vehicle. Protects against barnacles, worms, slime, grass, moss and other forms of marine growth. For use on fiberglass, wood, and steel boats. May be applied over previously painted... surfaces. Dries to a smooth, attractive finish. Does not crack, chip, check or peel.

Directions for Use:

It is a violation of federal law to use or dispose of this product in a manner inconsistent with its labeling:

It is unlawful to use this product on nonaluminum hulled vessels less than 82 feet (25 meters) in length (on deck) except for the outboard motor or lower drive unit of such vessel.

Users must comply with all applicable OSHA requirements.

During and after paint removal and application of new TBT paint, methods must be employed which are designed to prevent release of TBT paints into the aquatic environment. Following removal of old TBT paint and/or application of new TBT paint, all paint chips and abrasives, paint containers, unused paint, and any other waste product resulting from paint removal or application must be disposed of in a sanitary landfill.

) New Fiberglass - No Sanding

Thoroughly clean with 551 Hi-Solvency Thinner & Cleaner, lifting the solvent, wax and contaminants off the surface with clean rags.

Apply one thin coat of 179 No Sanding Primer, allowing to dry a minimum of one hour and a maximum of four hours. Apply two coats of U.S.M.C.δ by brush, roller or spray.

New Fiberglass - Epoxy Barrier Coat

Thoroughly clean with 551 Hi-Solvency Thinner & Cleaner, lifting the solvent, wax and contaminants off the surface with clean rags.

Abrade with 80 grit sandpaper. Seal with two coats of B370 Epoxy Primer.



) Sand between coats and before applying the anti-fouling coating to improve adhesion. Apply two coats of U.S.M.C.δ by brush, roller or spray.

New Wood

Sand with 80 grit sandpaper, clean thoroughly and apply two coats of U.S.M.C.δ by brush, roller or spray.

Metal

Iron and steel should be cleaned to bright metal and then sealed with two coats of an anticorrosive primer such as B374 Red Lead Epoxy. Apply two coats of U.S.M.C.δ by brush, roller or spray.

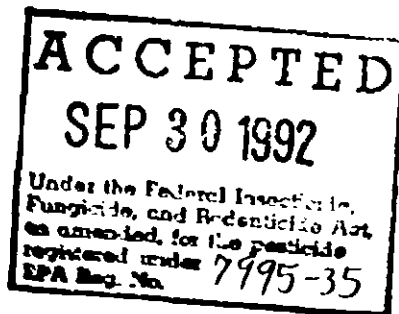

U.S.M.C.δ contains cuprous oxide and is not recommended for aluminum surfaces unless they are fully protected by a barrier coat.

Previously Coated Surfaces

U.S.M.C.δ can be applied over most other hard and soft coatings so long as they are clean and in good condition. Coatings that are cracked, damaged or peeling should be completely removed before painting.

Back Panel - Second Column

Application Information

Mix thoroughly. Allow to dry at least six hours between coats and before launching. For best results, apply at least two coats by spray, short-nap roller or brush. If necessary, thin with up to 10% mineral spirits. Use mineral spirits for clean up. Paint only when the surface temperature is 50° or above. Expected coverage is 350 to 400 square feet per gallon.

Maintenance

Physical damage, fuel spills and pollution can reduce the effectiveness of anti-fouling coatings. Therefore, it is recommended that the bottom be inspected periodically. If necessary, clean with a soft towel. Never use a stiff brush, scrub pad or abrasive cleaning tools to maintain U.S.M.C.δ anti-fouling coatings.

U.S.M.C.δ can be applied over most other bottom paints, so long as they are sound and undamaged.

Storage and Disposal

Do not contaminate water, food or feed by storage or disposal. Store anti-fouling coatings in their original tightly sealed containers.


Pesticide Disposal

Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

Container disposal

Do not reuse empty container. Rinse empty container thoroughly and discard in trash, or by other procedures approved by State or local authorities.

(B749MI/8)

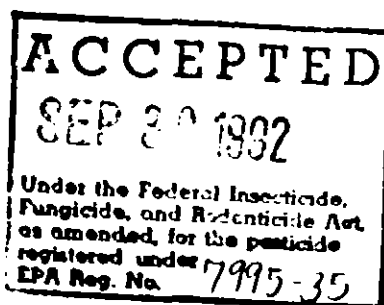

BEST AVAILABLE COPY

Back Panel - Third Column

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER

Corrosive. Causes skin burns. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. Causes eye irritation. May be fatal if swallowed. Harmful if absorbed through skin or inhaled. This product may be a dermal sensitizer. Avoid contact with skin, eyes, or clothing. Avoid breathing vapor, spray mist, dust, or chips from sanding. Wash thoroughly with soap and water after handling and before eating or smoking. Use with adequate ventilation. While spraying and/or sanding boat surface, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health.

Practical Treatment (First Aid)

If swallowed. Promptly drink a large quantity of water. Avoid alcohol. Get medical attention.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage.

If in eyes. Flush with plenty of water. Get medical attention.

If on skin. Wash with soap and water. Get medical attention.

If inhaled. Remove victim to fresh air. If not breathing, give mouth-to-mouth respiration. Get medical attention immediately.

Environmental Hazard

This product is toxic to fish and other marine life. Do not apply directly to the water during cleaning or disposal of wastes. Do not allow chips or dust generated during paint removal to enter the water. Dispose of paint debris in an approved landfill.

Physical or Chemical Hazard

COMBUSTIBLE


Do not use or store near heat or open flame.

E.P.A. Registration #7995-35
E.P.A. Est. #7995-MA-1

Rule Industries, Inc.
Cape Ann Industrial Park
Gloucester, MA 01930, U.S.A.

Rule Registered Trademark.

(B749MI/9)

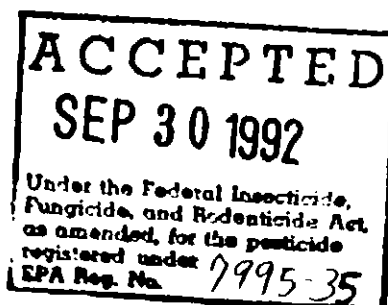

BEST AVAILABLE COPY