

CARBOLINE SUPER® TROPICAL ANTI-FOULING RED 1240-18  
For Commercial Use Only

FOR GENERAL USE

PRECAUTIONARY STATEMENTS \*1

HAZARDS TO HUMANS

DANGER \*2

Corrosive. Causes irreversible eye\*3 damage & skin burns. May be fatal if swallowed. Harmful if absorbed through skin or inhaled.

This product may be a dermal sensitizer. Do not get on skin, in eyes, or on clothing. Wear protective clothing such as long sleeved cotton shirt, long pants, hat & gloves, goggles or face shield. Avoid breathing vapor or spray mist. Wash thoroughly with soap & water after handling. Remove contaminated clothing and wash before reuse. Use with adequate ventilation.

While spraying paint or sanding boat surface, wear a respirator jointly approved by the Mining Enforcement & Safety Administration & the National Institute for Occupational Safety & Health.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS

(Flammable)

Keep away from heat & open flame.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

STORAGE & DISPOSAL\*4

Storage: Temperature 40°-110°F (4-43°C)

Humidity: 0-100%

Disposal: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture & dispose of in a sanitary landfill, or by other approved state & local procedures.

Pesticide, spray mixture, or rinsate that cannot be used according to label instructions must be disposed of according to federal or approved state procedures under Subtitle C of the Resource Conservation & Recovery Act.

EPA/Anti-Fouling Red  
jas/121382

Active Ingredient:	
tributyltin fluoride	16.0%
bis(tributyltin) oxide	3.5%
Inert Ingredients	80.5%
Total	100.0%

Contains Petroleum Distillates  
Total Tin Content 7.6%

KEEP OUT OF REACH OF CHILDREN

DANGER \*4

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Get Medical Attention

NOTE TO PHYSICIAN: Muscosal damage may contraindicate the use of gastric lavage.

IF IN EYES: Flush with plenty of water. Get Medical Attention.


IF ON SKIN: Wash with plenty of soap and water. Get Medical Attention.

Mfg. By: Carboline Company  
(Address as appropriate)

EPA Est. No. (As appropriate)

EPA Reg. No. 8186-2

Net Contents: 5 Gallons or  
18.9 Liters

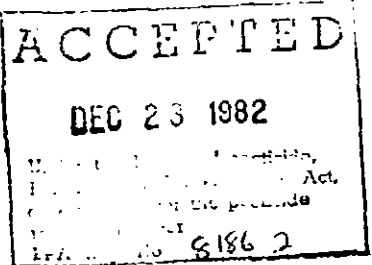

Carboline 1240-18 is a fast drying anti-fouling which offers long term protection from marine organisms & slime in fresh and salt water when applied over properly primed wood, steel, aluminum or fiberglass bottoms. Metal surfaces should be primed with non-conductive anti-corrosive coatings before application; wood should be clean, dry and free of loose paint. Spray application is recommended, however, application by roller is acceptable. When spraying, applicators must be adequately covered to preclude the possibility of eye or skin contact or inhalation of the spray mist. A full face, air supplied respirator is recommended. Similar precautions should be taken during mixing & for other workers within a 25 foot radius of the application. See Product Data Sheet for further details.

WARRANTY STATEMENT:

Our recommendations for use of this product are based upon tests believed to be reliable. The use of this product being beyond the control of the manufacturer, no guarantee, expressed or implied, is made as to the effects of such or the results to be obtained if not used in accordance with directions or established safe practice. The buyer must assume all responsibility, including injury or damage, resulting from its misuse as such, or in combination with other materials.

- \*1 6 pt. type
- \*2 8 pt. type
- \*3 6 pt. type
- \*4 12 pt. type
- \*5 8 pt. type

L0714RD-1/83

