




ONE U.S. GALLON

NAVICOTE

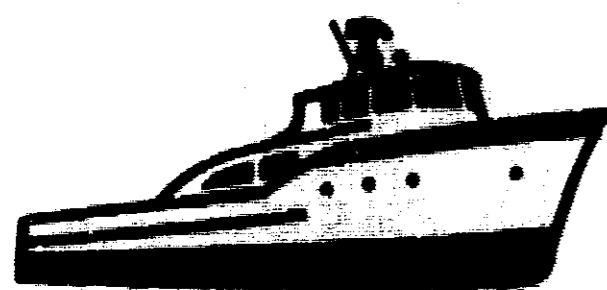

WARNING!

KEEP OUT OF REACH OF CHILDREN
VAPOR HARMFUL — COMBUSTIBLE

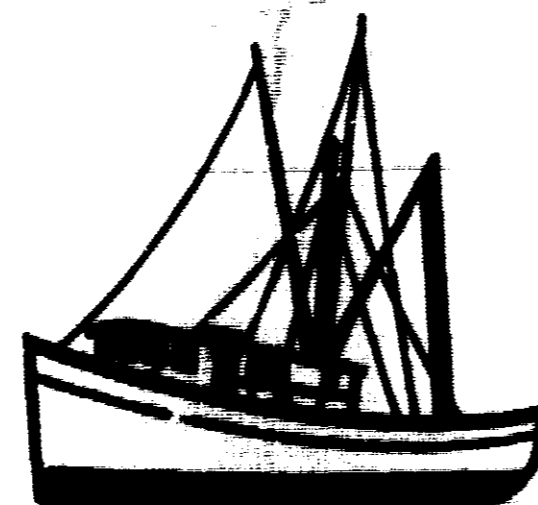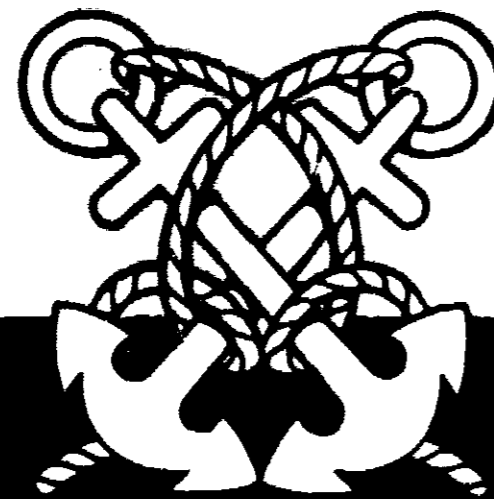

ACTIVE INGREDIENTS
Tributyltin Fluoride 11.88%
INERT INGREDIENTS 88.12%
100.00%

WARNING!
CONTAINS TRIBUTYL TIN FLUORIDE
KETONES AND XYLOL

DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME. Avoid breathing of vapor or spray mist. Do not get in eyes, on skin or on clothing. May be absorbed through skin. Personnel spraying this paint should wear full face air mask and protective clothing to avoid skin and eye contact. Close container after using. Do not reuse empty container; destroy it by perforating or crushing and bury or discard in a safe place. Avoid storage near feed or foodstuffs.

Do not contaminate water by cleaning of equipment or disposal of wastes.

FIRST AID: In case of contact, immediately remove contaminated clothing and wash skin with soap and water. For eyes, flush with plenty of water and get medical attention. Wash clothing before reuse. If swallowed, induce vomiting and CALL A PHYSICIAN.

USE ONLY WITH ADEQUATE VENTILATION

VINYL ANTI-FOULING WHITE
MD-3095

9461-57
WCC 12/19/73
9461-57

NAVICOTE® VINYL ANTI-FOULING WHITE MD-3095

DIRECTIONS FOR USE

Be sure that all surfaces are clean, free of moisture, scale, grease or oil, remove all loose paint with wire brush or scraper. Mix thoroughly both by stirring and then pouring from one clean container to another several times. Stir from time to time during application.

Apply one or two coats "as is" on ship bottoms by brush or roller. For spraying, thin if necessary with NAVICOTE® THINNER MD-1931. Do not add oil or varnishes to this paint. Allow 2 hours between coats.

VINYL ANTI-FOULING must be applied over NAVICOTE® PRIMERS M-1038 and M-060 and should not be applied directly to metal. Allow 1 to 1 hour drying for M-1038 and 2 hours for M-060. Vessels may be launched anytime after 2 hours at 77°F under good conditions. Refer to NAVICOTE® PAINTING SYSTEMS GUIDE for Vinyl System data. 3095/

MUD-NVA/6088 10/3/73

DEVOE & RAYNOLDS CO., INC.

Newark, N. J. 07105 • San Francisco, California 94104 • New Orleans, La. 70117