

(A)	United States Environmental Protection Agency Office of Pesticide Programs (H7505C) Washington, DC 20460 <b>Application for Pesticide:</b>	<input type="checkbox"/> Registration <input type="checkbox"/> Amendment <input type="checkbox"/> Other	OPP Identifier Number <span style="font-size: 1.5em;">166293</span>
-----	---	---	--

**Section I**

1. Company/Product Number 9630-4,5,6,7,8,10,11,12,15,16,17,19,21,22	2. EPA Product Manager C. Giles-Parker	3. Proposed Classification <input type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) 24, 26, 27, 28, 29, 30, 31 32, 34 OMG AMERICAS, INC. (MOONEY CHEMICALS)	PM#	
5. Name and Address of Applicant (Include ZIP Code) OMG Americas, Inc. 2301 Scranton Road Cleveland, OH 44113  <input type="checkbox"/> Check if this is a new address		6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to:  EPA Reg. No. _____  Product Name _____

**Section II**

<input type="checkbox"/> Amendment - Explain below <input type="checkbox"/> Resubmission in response to Agency letter dated _____ <input checked="" type="checkbox"/> Notification - Explain below.	Final printed labels in response to Agency letter dated _____  "Me Too" Application. <b>NOTIFICATION</b>  Other - explain below. AUG 15 1996
---	--

**Explanation:** Use additional page(s) if necessary. (For section I and Section II.)  
 Our company has officially changed its name from Mooney Chemicals, Inc. to OMG Americas, Inc. In addition, we have added the "Effluent Discharge Statement" to all our labels.

NOTIFICATION

**Section III**

1. Material This Product Will Be Packaged In:				2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes* <input type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No		<input type="checkbox"/> Metal <input type="checkbox"/> Plastic <input type="checkbox"/> Glass <input type="checkbox"/> Paper <input type="checkbox"/> Other (Specify) _____	
* Certification must be submitted.		If "Yes," Unit Package wgt.	No. per container	If "Yes," Package wgt.	No. per container
3. Location of Net Contents Information <input type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) of Retail Container		5. Location of Label Directions <input type="checkbox"/> On Label <input type="checkbox"/> On Labeling accompanying product	
6. Manner In Which Label Is Affixed To Product <input type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled <input type="checkbox"/> Other ( _____ )					

**Section IV**

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)		
Name Laura J. Sydro	Title Product Compliance Specialist	Telephone No. (Include Area Code) 216-575-3679
Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.		6. Date Application Received (Stamped)
2. Signature 	3. Title Product compliance Specialist	
4. Typed Name Laura J. Sydro	5. Date 6/26/96	

<b>(A)</b> 	United States Environmental Protection Agency Office of Pesticide Programs (H7505C) Washington, DC 20460	<input type="checkbox"/> Registration <input type="checkbox"/> Amendment <input type="checkbox"/> Other	OPP Identifier Number  <h2 style="text-align: center;">166293</h2>
----------------	--	---	--

Section I		
1. Company/Product Number 9630-4, 5, 6, 7, 8, 10, 11, 12, 15, 16, 17, 18, 21, 22	2. EPA Product Manager C. Giles-Parker	3. Proposed Classification <input type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) 24, 26, 27, 28, 29, 30, 31 32, 34 OMG AMERICAS, INC. (MOONEY CHEMICALS)	PM#	
5. Name and Address of Applicant (Include ZIP Code) OMG Americas, Inc. 2301 Scranton Road Cleveland, OH 44113  <input type="checkbox"/> Check if this is a new address		6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to:  EPA Reg. No. _____  Product Name _____

Section II	
<input type="checkbox"/> Amendment - Explain below <input type="checkbox"/> Resubmission in response to Agency letter dated _____ <input checked="" type="checkbox"/> Notification - Explain below.	Final printed labels in response to Agency letter dated _____  "Me Too" Application.  Other - explain below.

**NOTIFICATION**

AUG 15 1996

**Explanation:** Use additional page(s) if necessary. (For section I and Section II.)

Our company has officially changed its name from Mooney Chemicals, Inc. to OMG Americas, Inc. In addition, we have added the "Effluent Discharge Statement" to all our labels.

NOTIFICATION

Section III					
1. Material This Product Will Be Packaged In:					
Child-Resistant Packaging <input type="checkbox"/> Yes* <input type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	2. Type of Container <input type="checkbox"/> Metal <input type="checkbox"/> Plastic <input type="checkbox"/> Glass <input type="checkbox"/> Paper <input type="checkbox"/> Other (Specify) _____		
* Certification must be submitted.		If "Yes," Unit Package wgt.	No. per container	If "Yes," Package wgt.	No. per container
3. Location of Net Contents Information <input type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) of Retail Container		5. Location of Label Directions <input type="checkbox"/> On Label <input type="checkbox"/> On Labeling accompanying product	
6. Manner in Which Label is Affixed To Product <input type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled <input type="checkbox"/> Other ( _____ )					

Section IV			
1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)			
Name Laura J. Sydro	Title Product Compliance Specialist	Telephone No. (Include Area Code) 216-575-3679	
<b>Certification</b> I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.			6. Date Application Received (Stamped)
2. Signature 	3. Title Product compliance Specialist		
4. Typed Name Laura J. Sydro	5. Date 6/26/96		

S  
H  
I  
P

123


CONTROL  
NET  
TARE  
GROSS

P.O.#0

NOTIFICATION  
FIG 15 1996



# M-GARD<sup>TM</sup> S540 WOOD PRESERVATIVE

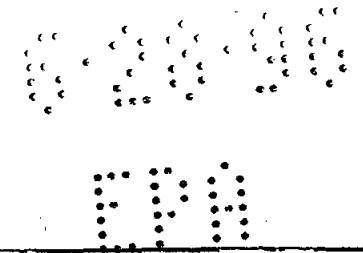

## PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

### WARNING

Causes skin irritation. Do not get on skin or clothing. Harmful if swallowed or absorbed through skin. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals.

### ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not contaminate water when disposing of equipment washwaters. Do not apply directly to water, to areas where surface water is present, or to intertidal areas below the mean high water mark.

### PHYSICAL OR CHEMICAL HAZARDS

Apply this product only as specified on the label. Do not use, pour, spill or store near heat or open flame. Use only with adequate ventilation. Close container after each use.

## STORAGE AND DISPOSAL

Store at temperatures between 0 F and 100 F. If the product has been spilled or is leaking, remove the source of the spill or leak. Recover free liquid. Spread Absorbant, then pick up and place in containers. Then, where applicable, wash area with detergent and water. Store product in the original container only. Keep container when not in use. Do not use empty container. Wrap container and put into trash collection.

## EFFLUENT DISCHARGE STATEMENT

Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

### ACTIVE INGREDIENT:

Copper Naphthenate 19.25%  
(Copper, as metal, 2%)

INERT INGREDIENTS 80.75%

TOTAL 100.00%

CONTAINS PETROLEUM DISTILLATES  
PRODUCT WT/GAL 6.8 LBS.

Coverage: 100-300 sq. ft./Gal - depending on porosity and method of application.

PROTECTS WOOD  
IN CONTACT WITH SOIL & WATER  
PROTECTS AGAINST WOOD ROT, TERMITE  
DAMAGE, MILDEW AND MOISTURE.  
See other precautionary statements on side panel.

## HARMFUL IF SWALLOWED

### KEEP OUT OF REACH OF CHILDREN

## WARNING

COMBUSTIBLE

### STATEMENT OF PRACTICAL TREATMENT

- IF IN EYES: Hold eyes open and flush with steady gentle stream of water for 15 minutes.
- IF SWALLOWED: Drink promptly a large quantity of milk, egg white, gelatin mixture, or, if these are not available, large quantities of water. Avoid alcohol. Do not induce vomiting as it may cause respiration pneumonia.
- IF ON SKIN: Wash with plenty of soap and water. Get medical attention.

## DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

WOOD PRESERVATION: For the control of fungal rot and decay, mold and mildew, moss, termites, (including Formosan termites) and other wood destroying insects in wood products.

M-GARD S540 WOOD PRESERVATIVE FOR WOOD SURFACES IN CONTACT WITH SOIL, CONCRETE OR WATER INCLUDING FOUNDATIONS-SILLS-DOCKS-BOATS-FENCE POSTS.

M-GARD S540 is only intended for use on exterior wood. Do not apply to food or feed contact surfaces. Do not contaminate drinking water with treated articles. M-GARD S540 Wood Preservative provides protection against moisture, rot and mildew on any natural wood surface. This copper naphthenate wood preservative and insecticide will preserve, protect and seal wood surfaces that will be in contact with soil, water or concrete.

The copper fungicide gives a green cast to M-GARD S540 Wood Preservative. This product is not intended for use as a stain. The green color will fade within a few months when exposed to sunlight. Oil or alkyd stains or paints can be applied over M-GARD S540 Wood Preservative after overnight dry but the green may bleed through lighter colors. Do not over-coat M-GARD S540 Wood Preservative with latex paint or clear finishes until thoroughly cured (6-12 months).

### PREPARATION

Wood should be clean, dry, well seasoned and free of bark.

### APPLICATION

M-GARD S540 Wood Preservative should be applied liberally by brush, roller, spray or dipping in a container.

Dipping-wood should be dipped 3 to 30 minutes per inch of thickness. Fence posts, poles, foundations timbers and heavy wooden members should be immersed in the product for 12 to 48 hours.

Do not thin - Materials supplied at proper application consistency. Use one coat on materials to be finished with paint or stain. If no finish is to be used, apply two liberal coats within the hour. Thoroughly cover ends. The more preservative absorbed by the wood, the longer and more effective the protection period. Clean painting equipment with mineral spirits for quick cleanup.

### NOTE TO USER

Do not apply over painted or varnished surfaces. Apply liberally.



EPA Reg. No. 9630-15  
EPA Est. No. 9630-PA-01

TWO MILE RUN RD., FRANKLIN  
VENANGO COUNTY, PA 16323 • 814-432-2125

3  
4  
6

NET TARE GROSS

P.O.#

# M-GARD<sup>TM</sup> S542 WOOD PRESERVATIVE

## WATER REPELLENT

### PRECAUTIONARY STATEMENTS

#### HAZARDS TO HUMANS AND DOMESTIC ANIMALS

#### WARNING

Causes skin irritation. Do not get on skin or clothing. Harmful if swallowed or absorbed through skin. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals.

#### ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not contaminate water when disposing of equipment washwaters. Do not apply directly to water, to areas where surface water is present, or to intertidal areas below the mean high water mark.

#### PHYSICAL OR CHEMICAL HAZARDS

Apply this product only as specified on the label. Do not use, pour, spill or store near heat or open flame. Use only with adequate ventilation. Close container after each use.

### STORAGE AND DISPOSAL

Store at temperatures between 0 F and 100 F. If the product has been spilled or is leaking, remove the source of the spill or leak. Recover free liquid. Spread absorbent, then pick up and place in containers. Then, where applicable, wash area with detergent and water. Store product in the original container only. Keep container when not in use. Do not use empty container. Wrap container and put into trash collection.

### EFFLUENT DISCHARGE STATEMENT

Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

ACTIVE INGREDIENT:	
Copper Naphthenate	19.25%
(Copper, as metal, 2X)	
INERT INGREDIENTS	80.75%
TOTAL	100.00%
CONTAINS PETROLEUM DISTILLATES	
PRODUCT WT/GAL = 6.8 LBS.	

PROTECTS WOOD IN CONTACT WITH SOIL & WATER PROTECTS AGAINST WOOD ROT, TERMITE DAMAGE, MILDEW AND MOISTURE.

See other precautionary statements on side panel.

### HARMFUL IF SWALLOWED KEEP OUT OF REACH OF CHILDREN WARNING

COMBUSTIBLE

#### STATEMENT OF PRACTICAL TREATMENT

- IF IN EYES: Hold eyes open and flush with steady gentle stream of water for 15 minutes.
- IF SWALLOWED: Drink promptly a large quantity of milk, egg white, gelatin mixture, or, if these are not available, large quantities of water. Avoid alcohol. Do not induce vomiting as it may cause respiration pneumonia.
- IF ON SKIN: Wash with plenty of soap and water. Get medical attention.

### DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

M-GARD S542 WOOD PRESERVATIVE FOR WOOD SURFACES IN CONTACT WITH SOIL, CONCRETE OR WATER INCLUDING FOUNDATIONS-SILLS-DOCKS-BOATS-FENCE POSTS.

M-GARD S542 is only intended for use on exterior wood. Do not apply to food or feed contact surfaces. Do not contaminate drinking water with treated articles. M-GARD S542 Wood Preservative provides protection against moisture, rot and mildew on any natural wood surface. This copper naphthenate wood preservative and insecticide will preserve, protect and seal wood surfaces that will be in contact with soil, water or concrete.

The copper fungicide gives a green cast to M-GARD S542 Wood Preservative. This product is not intended for use as a stain. The green color will fade within a few months when exposed to sunlight. Oil or alkyd stains or paints can be applied over M-GARD S542 Wood Preservative after overnight dry but the green may bleed through lighter colors. Do not over-coat M-GARD S542 Wood Preservative with latex paint or clear finishes until thoroughly cured (6-12 months).

#### PREPARATION

Wood should be clean, dry, well seasoned and free of bark.

#### APPLICATION

M-GARD S542 Wood Preservative should be applied liberally by brush, roller, spray or dipping in a container.

Dipping-wood should be dipped 3 to 30 minutes per inch of thickness. Fence posts, poles, foundations timbers and heavy wooden members should be immersed in the product for 12 to 48 hours.

Do not thin - Materials supplied at proper application consistency. Use one coat on materials to be finished with paint or stain. If no finish is to be used, apply two liberal coats within the hour. Thoroughly cover ends. The more preservative absorbed by the wood, the longer and more effective the protection period. Clean painting equipment with mineral spirits for quick cleanup.

#### NOTE TO USER

Do not apply over painted or varnished surfaces. Do not apply over bark.

UNFAILING INTEGRITY - QUALITY - DELIVERY



TWO MILE RUN RD., FRANKLIN VENANGO COUNTY, PA 16323 - 814-432-2125

EPA Reg. No. 9630-1  
EPA Est. No. 9630-PA-01

NOTIFICATION

NOTIFICATION

AUG 15 1979

110 P

HTO  
P

737

CONTROL  
NET  
TARE  
GROSS

P.O.#

# M-GARD F540 WOOD PRESERVATIVE

## PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

### WARNING

Causes skin irritation. Do not get on skin or clothing. Harmful if swallowed or absorbed through skin. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals.

### ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not contaminate water when disposing of equipment washwaters. Do not apply directly to water, to areas where surface water is present, or to intertidal areas below the mean high water mark.

### PHYSICAL OR CHEMICAL HAZARDS

Apply this product only as specified on the label. Do not use, pour, spill or store near heat or open flame. Use only with adequate ventilation. Close container after each use.

## STORAGE AND DISPOSAL

Store at temperatures between 40 F and 100 F. If the product has been spilled or is leaking, remove the source of the spill or leak. Recover free liquid. Spread absorbant, then pick up and place in containers. Then, where applicable, wash area with detergent and water. Store product in the original container only. Keep container when not in use. Do not use empty container. Wrap container and put into trash collection.

## EFFLUENT DISCHARGE STATEMENT

Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

ACTIVE INGREDIENT		
Copper Naphthenate	19.25%	
(Copper, as Metal, 2)		
INERT INGREDIENT	80.75%	
TOTAL	100.00%	
CONTAINS PETROLEUM DISTILLATES		
PRODUCT WT/GAL = 6.8 LBS.		
COVERAGE: 100-200 sq.ft./Gal - depending on porosity and method of application.		

NOTIFICATION  
AUG 15 1999

PROTECTS WOOD  
IN CONTACT WITH SOIL & WATER  
PROTECTS AGAINST WOOD ROT, TERMITE  
DAMAGE, MILDEW AND MOISTURE.

See other precautionary statements on side panel.

**HARMFUL IF SWALLOWED  
KEEP OUT OF REACH OF CHILDREN  
WARNING**

COMBUSTIBLE

### STATEMENT OF PRACTICAL TREATMENT

IF IN EYES: Hold eyes open and flush with steady gentle stream of water for 15 minutes.

IF SWALLOWED: Drink promptly a large quantity of milk, egg white, and gelatin mixture, or, if these not available, large quantities of water. Avoid alcohol. Do not induce vomiting as it may cause respiration pneumonia.

IF ON SKIN: Wash with plenty of soap and water. Get medical attention.

## DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

WOOD PRESERVATION: For the control of fungal rot and decay, mold and mildew, moss, termites, (including Formosan termites) and other wood destroying insects in wood products.

M-GARD F540 WOOD PRESERVATIVE FOR WOOD SURFACES IN CONTACT WITH SOIL, CONCRETE OR WATER INCLUDING FOUNDATIONS-SILLS-DOCKS-BOATS-FENCE POSTS.

M-GARD F540 is only intended for use on exterior wood. Do not apply to food or feed contact surfaces. Do not contaminate drinking water with treated articles.

M-GARD F540 Wood Preservative provides protection against moisture, rot and mildew on any natural wood surface. This copper naphthenate wood preservative and insecticide will preserve, protect and seal wood surfaces that will be in contact with soil, water or concrete.

The copper fungicide gives a green cast to M-GARD F540 Wood Preservative. This product is not intended for use as a stain. The green color will fade within a few months when exposed to sunlight. Oil or alkyl stains or paints can be applied over M-GARD F540 Wood Preservative after overnight dry but the green may bleed through lighter colors. Do not over-coat M-GARD F540 Wood Preservative with latex paint or clear finishes until thoroughly cured (6-12 months).

### PREPARATION

Wood should be clean, dry, well seasoned and free of bark.

### APPLICATION

M-GARD F540 Wood Preservative should be applied liberally by brush, roller, spray or dipping in a container.

Dipping-wood should be dipped 3 to 30 minutes per inch of thickness. Fence posts, poles, foundations timbers and heavy wooden members should be immersed in the product for 12 to 48 hours.

Do not thin - Materials supplied at proper application consistency. Use one coat on materials to be finished with paint or stain. If no finish is to be used, apply two liberal coats within the hour. Thoroughly cover ends. The more preservative absorbed by the wood, the longer and more effective the protection period. Clean painting equipment with mineral spirits for quick cleanup.

NOTE: UNFAILING INTEGRITY - QUALITY - DELIVERY

Do not apply over painted or varnished surfaces. Do not apply over bark.

**CMG**  
AMERICAS

EPA Reg. No. 9630-15  
EPA Est. No. 9630-PA-01

TWO MILE RUN RD., FRANKLIN  
VENANGO COUNTY, PA 16323 • 814-432-2125

5  
4  
6

H  
T  
O  
P

735

CONTROL  
NET  
TARE  
GROSS

P.O.#

# M-GARD™ S540 HF WOOD PRESERVATIVE

## PRECAUTIONARY STATEMENTS

### HAZARDS TO HUMANS AND DOMESTIC ANIMALS

#### WARNING

Causes skin irritation. Do not get on skin or clothing. Harmful if swallowed or absorbed through skin. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals.

#### ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not contaminate water when disposing of equipment washwaters. Do not apply directly to water, to areas where surface water is present, or to intertidal areas below the mean high water mark.

#### PHYSICAL OR CHEMICAL HAZARDS

Do not use, pour, spill or store near heat or open flame. Use only with adequate ventilation. Close container after each use.

#### STORAGE AND DISPOSAL

Store at temperatures between 0 F and 100 F. If the product has been spilled or is leaking, remove the source of the spill or leak. Recover free liquid. Spread absorbent, then pick up and place in containers. Then, where applicable, wash area with detergent and water. Store product in the original container only. Keep container closed when not in use. Do not use empty container. Securely wrap original container in several layers of newspaper and discard in trash.

#### EFFLUENT DISCHARGE STATEMENT

Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

ACTIVE INGREDIENT:	
Copper Naphthenate	19.25%
(Copper, as metal, 2%)	
INERT INGREDIENTS	80.75%
TOTAL	100.00%

CONTAINS PETROLEUM DISTILLATES  
PRODUCT WT/GAL = 6.8 LBS.  
Coverage: 100-300 sq.ft./Gal. - depending on porosity and method of application.

See other precautionary statements on side panel

**HARMFUL IF SWALLOWED  
KEEP OUT OF REACH OF CHILDREN  
WARNING  
COMBUSTIBLE**

**STATEMENT OF PRACTICAL TREATMENT**  
IF IN EYES: Hold eyes open and flush with steady gentle stream of water for 15 minutes.  
IF SWALLOWED: Drink promptly a large quantity of milk, egg white, gelatin mixture, or, if these are not available, large quantities of water. Avoid alcohol. Do not induce vomiting as it may cause respiration pneumonia.  
IF ON SKIN: Wash with plenty of soap and water. GET MEDICAL ATTENTION.

## DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

**WOOD PRESERVATION:** For the control of fungal rot and decay, mold and mildew, moss, termites, (including Formosan termites) and other wood destroying insects in wood products.

M-GARD S540 HF (a copper naphthenate wood preservative and insecticide) will preserve and protect wood surfaces that will be in contact with soil, water or concrete. M-GARD S540 HF is only intended for use on exterior wood including foundations, sills, docks, boats and fenceposts. M-GARD S540 HF gives a green cast to wood. This product is not intended for use as a stain. The green color will fade within a few months when exposed to sunlight. Oil or alkyl stains or paints can be applied over M-GARD S540 HF after overnight drying but the green may bleed through lighter colors. Do not overcoat M-GARD S540 HF wood preservative with latex paint or clear finishes until thoroughly cured (6-12 months).

#### APPLICATION

PREPARATION: Wood should be clean, dry, well seasoned and free of bark. M-GARD S540 HF should be applied liberally by brush, roller, spray or dipping in a container. Wood should be dipped 3 to 30 minutes per inch of thickness. Fenceposts, poles, foundation timbers and heavy wooden members should be immersed in the product for 12 to 48 hours. Do not thin.

M-GARD S540 HF is supplied at proper application consistency. Use one coat on materials to be finished with paint or stain. If no finish is to be used, apply two liberal coats within the hour. Thoroughly cover ends. The more wood preservative absorbed by the wood, the longer and more effective the protection period. Clean equipment with mineral spirits.

#### NOTE TO USER

M-GARD S540 HF is intended for use on exterior wood only. Do not apply to food or feed contact surfaces. Do not contaminate drinking water with treated articles. Do not apply over painted or varnished surfaces. Do not apply over bark. apply over bark.

PROTECTS WOOD IN CONTACT WITH SOIL AND WATER.  
PROTECTS AGAINST WOOD ROT, TERMITE DAMAGE, MILDEW AND MOISTURE.

UNFAILING INTEGRITY - QUALITY - DELIVERY



TWO MILE RUN RD., FRANKLIN  
VENANGO COUNTY, PA 16323 • 814-432-2125

EPA Reg. No. 9630-15  
EPA Est. No. 9630-PA-01

6  
9-6  
9