

**ENVIRONMENTAL HAZARDS:** This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

**PHYSICAL OR CHEMICAL HAZARDS:** Flammable. Keep away from heat and open flame.

**DIRECTIONS FOR USE:** It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**ANTI-FOULING PAINT FOR METAL BOTTOMS:** To control the attachment of marine fouling, i.e., barnacles, grass, algae, etc., on steel bottoms in salt and brackish water which would sustain such growth. Not recommended for use on aluminum. A minimum of two coats is recommended for best performance.

**Surface Preparation:** Before application of anti-fouling, all surfaces must be dry and cleaned of dirt, dust, oil, rust, loose paint, salt residues, and other contaminants. Steel must be coated with a suitable primer or anti-corrosive barrier coats. When applied over Mobil Barrier Coat System, some slight discoloration may be evident; this does not affect performance.

**Mixing:** Before use, power mix or box the paint until

the product is uniform. Stir the paint at intervals during application to maintain uniformity.

**Application:** Apply by brush, roller or spray. Do not paint in cold or damp weather.

**Thinning:** Thin slightly with Thinner 7-T-33 when required for application. Use Thinner 7-T-33 for clean up.

**Coverage:** Apply at a rate that will provide a 2 mil dry film per coat, theoretically 240 sq. ft. per gallon. Actual coverage will vary depending upon application technique, job conditions and type of surface.

**Dry Time:** At 75°F and 50% R.H., allow at least 4 hour dry time between coats, and a minimum of 8 hours before refloating. Launching is recommended, preferably within 48 hours.

**STORAGE AND DISPOSAL**

**PESTICIDE DISPOSAL:** Pesticide, spray mixture or residue that cannot be used according to label instructions, must be disposed of according to Federal, or approved state procedures under Subtitle C of the Resource Conservation and Recovery Act.

**CONTAINER DISPOSAL:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

ML 319 9-82

**PRECAUTIONARY STATEMENTS**

**HAZARDS TO HUMANS (& DOMESTIC ANIMALS) (S1-1)**

**CONTAINS ORGANIC SOLVENT**

**WARNING!**

FLAMMABLE.

CAUSES EYE IRRITATION.

HARMFUL IF ABSORBED THROUGH SKIN.

Avoid contact with skin, eyes, or clothing.

Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat.

May be fatal if swallowed or inhaled.

Do not breathe vapor.

When used in enclosed areas, spraying paint or sanding boat surface, wear a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health.

Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.



**PRACTICAL TREATMENT:**

If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

If in eyes: Flush with plenty of water. Get medical attention.

If on skin: Wash with plenty of soap and water. Get medical attention.

If inhaled: Remove victim to fresh air. In not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

**SHIPPING NAME:**

HAZARD CLASS:

HAZARD IDENTIFICATION NUMBER: UN1263

**PAINT**

FLAMMABLE LIQUID

"Refer to product material safety data bulletin, available upon request, for further safety and handling information."

(BCL-84 6-82)

**Mobil®**  
**Marine Coating**  
**A Paint Product**  
**Sovaklor**  
**Super Tropical**  
**Anti-Fouling 59-R-21**

KEEP OUT OF REACH OF CHILDREN

**WARNING!** See Precautions Elsewhere on Label

For Industrial Use Only. Do Not Use In or Around a Household or Dwelling.

Not Sold For Use In Air Pollution Regulation Areas. Photochemically Reactive Per Rule 102.

(FR-11)

(FR-31)

EPA Reg. No. 9855-19

EPA Est. 98

NET 5 GAL. (18.927 Lite

# Mobil® e Coating

aint Product (FR-3)

Sovaklor

per Tropical

Fouling 59-R-21

T OF REACH OF CHILDREN

Precautions Elsewhere on Label (FR-22)

Use Only. Do Not Use in or  
household or Dwelling. (FR-11)  
Use in Air Pollution Regulation Areas.  
ically Reactive Per Rule 102. (FR-21)

355-19

EPA Est. 9855-N.J.-1

GAL. (18.927 Liters).

SOVAKLOR SUPER TROPICAL  
ANTI-FOULING 59-R-21

ANTI-FOULING INGREDIENTS

ACTIVE INGREDIENTS

Cuprous Oxide

32.8%

Metallic Copper


7%

INERT INGREDIENTS

60.4%

11-3-72

100.0%

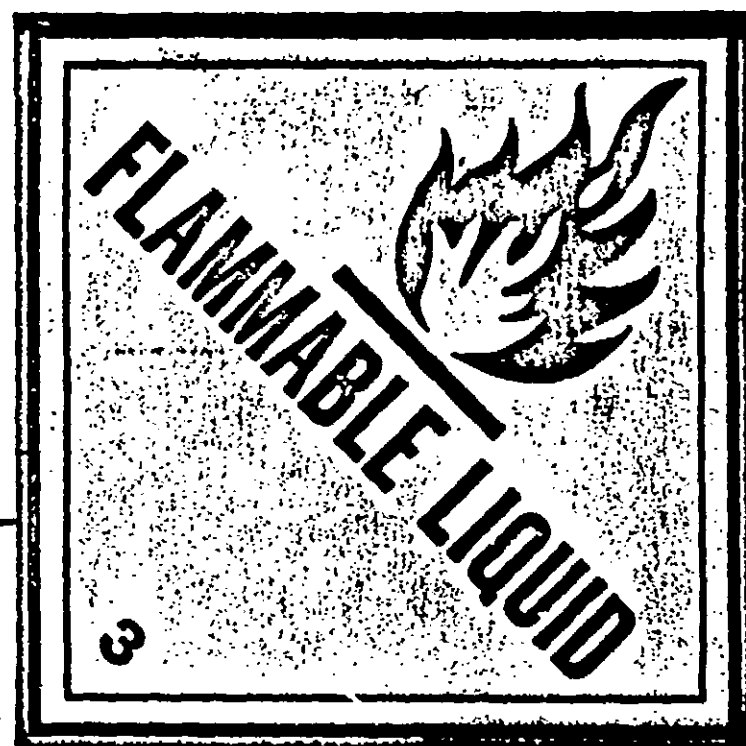

BEST DOCUMENT AVAILABLE

Mobil Chemical Company

MAINTENANCE & MARINE COATINGS DEPT. EDISON, N.J.  
87/BEAUMONT, TEX. 77704/KANKAKEE, ILL. 60001/LOS ANGELES AREA/AZUSA, CALIF. 91002