

RECEIVED
 SEP 27 1983
 U.S. Fish and Wildlife
 Department, for the
 Secretary
 Dept. No. 985-25

Mobil Marine Coatings

Coastal Super Service Anti-Fouling 59-R-7

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS: Flammable. Keep away from heat and open flame.

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling. **ANTI-FOULING PAINT FOR METAL BOTTOMS.** To control the attachment of marine fouling (i.e. barnacles, grass, algae, etc.) on steel bottoms in salt and brackish water which would sustain such growth. Not recommended for use on aluminum. A minimum of two coats is recommended for best performance.

Surface Preparation: Before application of anti-fouling, all surfaces must be dry and cleaned of dirt, dust, oil, rust, loose paint, salt residue and other contaminants. Steel must be coated with a suitable primer or anti-corrosive barrier coats.

Mixing: Before use, power mix or box the paint until the product is uniform. Stir the paint at intervals during application to maintain uniformity.

Application: Apply by brush, roller or spray. Do not paint in cold or damp weather.

Thinning: Thin slightly with Thinner 7-T-33 when required for application. Use Thinner 7-T-33 for clean-up.

Coverage: Apply at a rate that will provide a 2 mil dry film per coat, theoretically 433 sq ft per gallon. Actual coverage will vary depending upon application technique, job conditions and type of surface.

Dry Time: At 75°F and 50% RH, allow at least 2 hour dry time between coats and a minimum of 4 hours before refloating. Where exposed to direct sunlight or high temperatures, launching is recommended no more than 24 hours after application.

STORAGE AND DISPOSAL:

PESTICIDE DISPOSAL: Pesticide spray mixture or residue that cannot be used according to label instructions must be disposed of according to Federal or approved state procedures under Subtitle C of the Resource Conservation and Recovery Act.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures. ML-320 9-82

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS (& DOMESTIC ANIMALS) (28-1)

CONTAINS ORGANIC SOLVENT

WARNING!

FLAMMABLE
 CAUSES EYE IRRITATION
 HARMFUL IF ABSORBED THROUGH SKIN

Avoid contact with skin, eyes, or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapor.

When used in enclosed areas, spraying paint or sanding boat surface, wear a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse.



Wash thoroughly with soap and water after handling.

PRACTICAL TREATMENT: If swallowed, Drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

If in eyes, Flush with plenty of water. Get medical attention.

If on skin, Wash with plenty of soap and water. Get medical attention.

If inhaled, Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

DOT SHIPPING NAME: PAINT
 DOT HAZARD CLASS: FLAMMABLE LIQUID
 DOT HAZARD IDENTIFICATION NUMBER: UN 1263
 Refer to Product Material Safety Data Bulletin available upon request for further safety and handling information. BCL 84 (3.83)

KEEP OUT OF REACH OF CHILDREN
WARNING! See Precautions Elsewhere on Label

For Industrial Use Only. Do Not Use In or
 Around a Household or Dwelling. (28-11)
 Not Sold For Use In Air Pollution Regulation Areas.
 Photochemically Reactive Per Rule 102. (28-11)

EPA Reg. No. 9855-25 EPA Est. 9855-25

NET 5 GAL. (18.927 Liters)

BEST DOCUMENT AVAILABLE

1983

Insect
Identification
No. 784

Mobil Marine Coating

Marine Super Service Anti-Fouling 59-R-7

KEEP OUT OF REACH OF CHILDREN

See Precautions Elsewhere on Label (FR-12)

For Industrial Use Only. Do Not Use In or
Around a Household or Dwelling. (FR-11)
Not Sold For Use In Air Pollution Regulation Areas.
Photochemically Reactive Per Rule 102. (FR-11)

No. 9855-25

EPA Est. 9855-NJ-1


NET 5 GAL. (18.927 Liters)



(T-0 3-P3)

**PAINT
UN 1263**

ANTI-FOULING INGREDIENTS	
ACTIVE INGREDIENTS	
Cuprous Oxide	47.61%
INERT INGREDIENTS	52.39%
59-18 (6-14-83)	100.00%

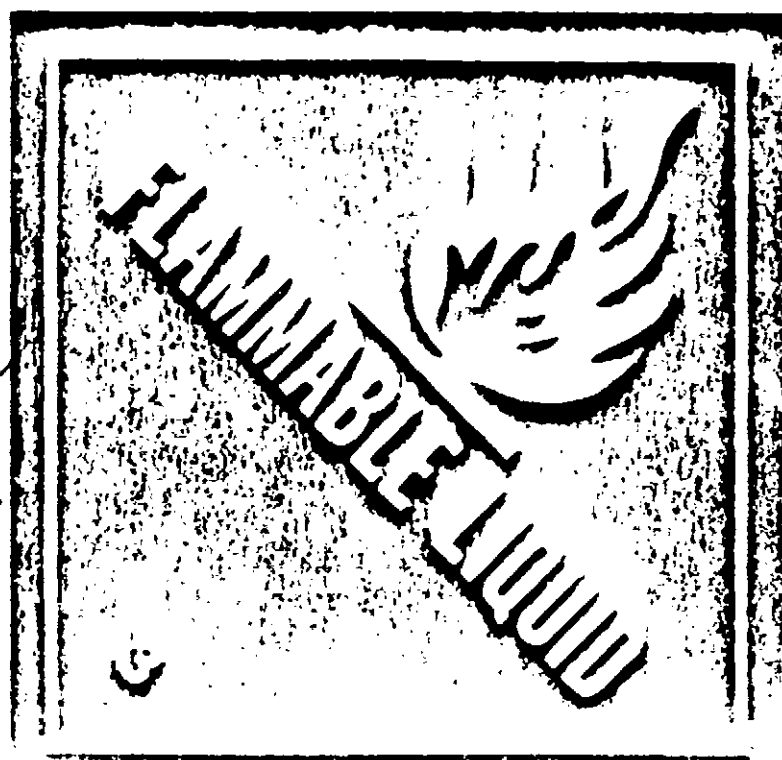

Mobil Chemical Company

MAINTENANCE & MARINE COATINGS DEPARTMENT
EDISON, N.J. 08818/BEALMONT, TEX. 77704/KANKAKEE, ILL. 60901/LOS ANGELES AREA/AZUSA, CALIF. 91702

FILE