

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER May cause severe eye damage and severe skin irritation. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. May be harmful if inhaled, use only with adequate ventilation. May be harmful if swallowed. Avoid contamination food.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and wildlife. Do not discharge into lakes, streams, ponds or public waters unless in accordance with an NPDES permit. For guidance contact your Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS

Extremely Flammable.
Keep away from heat and flame.
Corrosive to metals.

STORAGE AND DISPOSAL

- 1 PROHIBITIONS** Do not contaminate water, food, or feed by storage or disposal.
- 2 STORAGE:** This product is corrosive to mild steel. Do not store or transport in unlined metal containers.
- 3 PESTICIDE DISPOSAL** Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.
- 4 CONTAINER DISPOSAL**
METAL CONTAINERS: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.
PLASTIC CONTAINERS: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.
GENERAL: Consult federal, state or local disposal authorities for approved alternative procedure.



BAKER PERFORMANCE CHEMICALS, INC.®

B-615

A Baker Hughes company

INDUSTRIAL MICROBIOCIDES

Controls slime forming bacteria and sulfate reducing bacteria in oil field waters.

ACTIVE INGREDIENTS:	1-(Alkyl* amino)-3-aminopropane diacetate	46.87%
INERT INGREDIENTS:	53.13%
	TOTAL	100.00%

* Alkyl as in fatty acids of coconut oil.

KEEP OUT OF REACH OF CHILDREN

DANGER

- INHALATION:** If overcome by exposure, remove victim to fresh air immediately. Give oxygen or artificial respiration as needed. Obtain emergency medical attention. Prompt action is essential.
- EYE CONTACT:** In case of eye contact, immediately rinse with clean water for 20-30 minutes. Retract eyelids often. Obtain emergency medical attention.
- SKIN CONTACT:** Immediately remove contaminated clothing. Wash skin thoroughly with mild soap/water. Flush with lukewarm water for 15 minutes. If sticky, use waterless cleaner first. Obtain emergency medical attention.
- INGESTION:** If swallowed, give lukewarm water (pint) if victim is completely conscious/alert. DO NOT induce vomiting/risk of damage to lungs exceeds poisoning risk. Obtain emergency medical attention.

NOTE TO PHYSICIAN:

IF SWALLOWED, DO NOT INDUCE VOMITING. GASTRIC LAVAGE AND CATHARTIC INDICATED. TREAT BURNS OR ALLERGIC REACTIONS CONVENTIONALLY AFTER DECONTAMINATION.

DISTRIBUTED BY

BAKER PERFORMANCE CHEMICALS, INC.

A DIVISION OF BAKER HUGHES

3920 ESSEX LANE, HOUSTON, TEXAS 77027

(713) 599-7400

EPA REGISTRATION NO.
10707-33

EPA ESTABLISHMENT NO.
10707TX-01 ☐ 10707CA-02 ☐
10707CA-01 ☐ 10707OK-01 ☐

EMERGENCY TELEPHONE (24 HOURS PER DAY) 713-599-7400

**DIRECTIONS FOR USE
GENERAL CLASSIFICATION**

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

OIL FIELD INJECTION WATERS

MAGNACIDE™ B-615 may be used either in slug treatment or in continuous application. Dosages may vary from 500 ppm of MAGNACIDE™ B-615 in slug applications to 30-50 ppm of MAGNACIDE™ B-615 in continuous treatment (1/4 pint per 1,000 gallons equals approximately 30 ppm). A typical slug treatment is to add 120-500 ppm of MAGNACIDE™ B-615 (1 pint to 2 quarts per 1,000 gallons of water) at intervals as needed to prevent growth of bacterial slime. Badly fouled systems may be slug treated to establish control followed by continuous treatment of 30-60 ppm (1/4 to 1/2 pints per 1,000 gallons of water) to maintain control. Monitoring methods include broth bottles, coupons and bacteria culture counts.


Notice of Warranty

Our recommendations for use of this product are based upon tests believed to be reliable. The use of this product being beyond the control of the manufacturer, no guarantee, expressed or implied is made as to the effects of such or the results to be obtained if not used in accordance with directions or established safe practice. The buyer must assume all responsibility including injury or damage resulting from its misuse as such or in combination with other materials.

Net Weights

5 gal/40 lbs. - 55 gal/439 lbs

Available in Bulk Quantities.

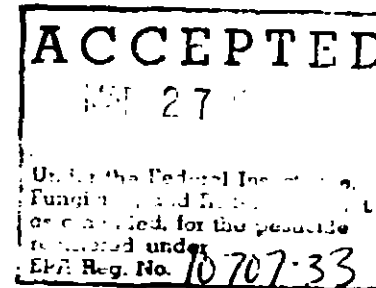

FLAMMABLE LIQUID, CORROSIVE, N.O.S.

(CONTAINS ISOPROPANOL, ALKYL DIAMINE ACETATE)

UN2924