


ALGAECIDE - 35

COOLING TOWER ALGAECIDE
KEEPS TOWER WATER CLEAN AND FREE
OF GROWING ALGAE--CONTROLS ALGAE SLIME

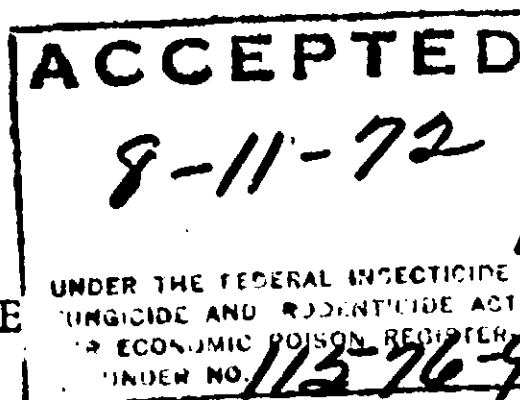

... FOR CHEMICAL CONTROL OF
ALGAE AND SLIME IN WATER COOLING
TOWERS

ACTIVE INGREDIENTS.....10.0%
n-alkyl (50%C₁₄, 40%C₁₂, 10%C₁₆)dimethyl
benzyl ammonium chloride.....10.0%
INERT INGREDIENTS.....90.0%

DANGER-KEEP OUT OF REACH OF CHILDREN--SEE PRECAUTIONS BELOW

HARMFUL OR FATAL IF SWALLOWED OR ABSORBED THROUGH SKIN. INJURIOUS
TO EYES. CAUSES BURNS. RAPIDLY ABSORBED THROUGH SKIN.

DO NOT GET INTO EYES, ON SKIN OR CLOTHING. DO NOT TAKE INTERNALLY.
AVOID BREATHING VAPOR. WASH CLOTHING BEFORE REUSE. CAUSES EYE DAMAGE.
WEAR GOGGLES OR FACE SHIELD WHEN HANDLING.

WASH THOROUGHLY AFTER HANDLING. KEEP PACKAGE TIGHTLY CLOSED WHEN NOT
IN USE. USE WITH ADEQUATE VENTILATION.

FIRST AID

IN CASE OF CONTACT FLUSH EYES IMMEDIATELY WITH PLENTY OF WATER FOR AT
LEAST 15 MINUTES AND GET MEDICAL ATTENTION. FOR SKIN WASH WITH SOAP
AND PLENTY OF WATER. REMOVE CONTAMINATED CLOTHING.

FISH PRECAUTIONS

THIS PRODUCT IS TOXIC TO FISH. DO NOT CONTAMINATE WATER BY DISCHARGING TREATED EFFLUENT INTO
LAKES, STREAMS, OR PONDS. APPLY THIS PRODUCT ONLY AS SPECIFIED ON THIS LABEL.

DIRECTIONS FOR USE

ALGAECIDE-35 IS USED TO CONTROL ALGAE, BACTERIA, AND FUNGI IN RECIRCULATING COMMERCIAL AND INDUS-
TRIAL WATER COOLING TOWERS. PRIOR TO ITS USE, SYSTEMS MUST BE CLEANED TO REMOVE ALGAE GROWTH,
MICROBIOLOGICAL SLIME AND OTHER DEPOSITS. ALGAECIDE-35 SHOULD BE ADDED TO THE SUMP OF THE WATER
COOLING TOWER.

INITIAL DOSE: WHEN THE SYSTEM IS NOTICEABLY FOULED, APPLY 3 TO 6 GALLONS OF ALGAECIDE-35 PER
10,000 GALLONS OF WATER IN THE SYSTEM. REPEAT UNTIL CONTROL IS ACHIEVED.

SUBSEQUENT DOSE: WHEN MICROBIAL CONTROL IS EVIDENT, ADD 1 TO 3 GALLONS OF ALGAECIDE-35 PER 10,000
GALLONS OF WATER IN THE SYSTEM EVERY 2 TO 5 DAYS OR AS NEEDED FOR CONTROL.

INITIAL DOSE IS USED WHEN TOWER IS BEGINNING TREATMENT. IF HIGH TEMPERATURES PREVAIL OR TOWER HAS
HEAVY USE ADD SUBSEQUENT DOSE MORE FREQUENTLY.

DO NOT REUSE EMPTY DRUM. RETURN TO DRUM RECONDITIONER OR DESTROY BY PERFORATING OR CRUSHING AND
BURYING IN A SAFE PLACE.

E.P.A. REG. NO. 11576-9

WEIGHT ONE GALLON--8.7 LBS.



314 Spears Ave. Phone 267-6781

DATE _____

GROSS _____

TARE _____

NET _____

CUSTOMER _____

NUMBER _____