FEEDWATERS, INC. 340 EVELYN STREET PARAMUS, N. J. 07652

BETACOL 51 COMPOSITION

Active Ingredients.	
Sodium Dimethyldithiocarbamate	
Sodium 2-Mercaptobenzothiazole	
Inert Ingredients	

DIRECTIONS FOR INDUSTRIAL USE

COOLING TOWERS: To control bacterial and fungal slime in recirculating water cooling towers, apply an initial dose of 25.6 ounces by weight (21.3 fluid ounces) per 1000 gallons of water in the system when microbial growths are apparent. Repeat as necessary until control is obtained. When microbial growths are under control or when control is obtained by treatment with the initial dose, apply a subsequent dose of 3.2 ounces by weight (2.7 fluid ounces) to 6.4 ounces by weight (5.3 fluid ounces) per 1000 gallons of water in the system every 3 to 5 days or as needed. Apply product to the cooling tower basin, distribution decks or in the tower sump. Towers badly fouled by scale or slime must be precleaned before treatment. This product is not effective against algae. BETACOL 51 weighs 9.6 pounds per gailon.

Our recommendations for use are based on tests believed reliable. Since the use is beyond our control neither we nor the manufacturer can guarantee the results if such use is not in accordance with directions. We disclaim any responsibility for damages resulting from careless or improper handling or use.

CAUTION **KEEP OUT OF REACH OF CHILDREN**


May be harmful if swallowed or inhaled! May cause irritation of nose, throat and skin. Avoid contact with eyes, skin or clothing. Avoid breathing spray mist. In case of contact, flush with plenty of water. For eyes, get medical attention.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams. ponds, or public water. Apply this product only as specified on this label.

Do not re-use this container - destroy when empty.

Distributed by FEEDWATERS, INC., 340 Evelyn St., Paramus, N.J. 07652

EPA Reg. No. 11696-3

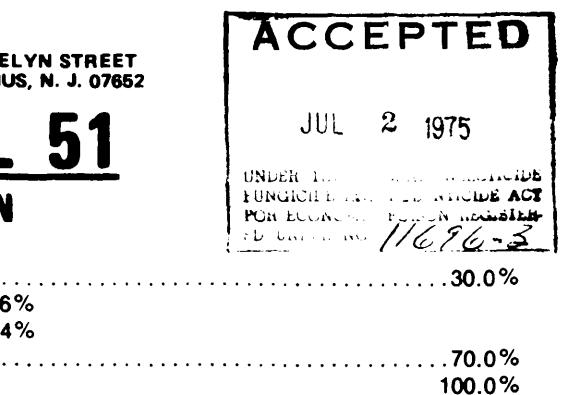

EPA Est. 11696-NJ-1