


Industrial Maintenance Corporation



WATER TREATMENT SPECIALISTS

CHARLOTTE, NORTH CAROLINA

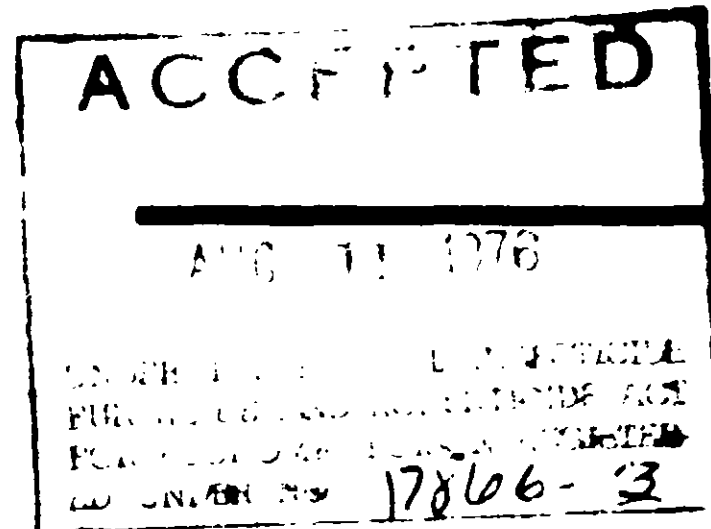

BA-107

WARNING
KEEP OUT OF REACH OF CHILDREN

DIRECTIONS FOR USE

BA-107 is used to inhibit the growth of algae, bacteria, and fungi in recirculating commercial and industrial cooling water systems. Before treatment with BA-107, systems must be cleaned to remove algal growth, microbiological slime, and other deposits. Then the system should be treated with an initial slug addition of 5.1 to 10.2 fluid ounces of BA-107 per 1,000 gallons of water in the system. Repeat the initial dosage until control is evident. Subsequent slug additions of 1.7 to 10.2 fluid ounces of BA-107 per 1,000 gallons of water should be made every 1 to 5 days or as needed. The required frequency of treatment depends on the relative amount of bleed-off and the severity of the microbiological problem. Slug additions of BA-107 should be made to the sump of water cooling towers.

EPA Est. No. 17866-NC 1
EPA Reg. No. 17866-3

COMPOSITION

Percent by Weight

Active ingredients	11.66%
Disodium cyanodithio- imidocarbonate	4.23%
Ethylenediamine	1.60%
Potassium N-methyl- dithiocarbamate	5.83%
Inert ingredients	88.34%
Weight per gallon	8.83 lb.
Weight of active ingredients per gallon	1.03 lb.

WARNING Keep Out of Reach of Children

See side panel for additional precautionary statements

Manufactured By

Industrial Maintenance Corporation

3520 Tryclan Drive
Charlotte, North Carolina 28210

Net Lbs.

Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, give patient doses of powdered charcoal immediately or all he can swallow of raw egg whites, milk, gruel, or flour and water. Then induce vomiting with salt, soap, or mustard in warm water. Call a physician immediately.

Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds or public water. Do not contaminate water by cleaning of equipment, or disposal of wastes. Apply this product only as specified on this label.