

SERVICE

STAA-CLEAR WR

QUALITY

READY TO USE WATER REPELLENT WOOD PRESERVATIVE

INGREDIENTS

ACTIVE INGREDIENTS:

Pentachlorophenol*	4.68%
Other Chlorinated phenols	0.54%
Petroleum Hydrocarbons	89.00%
INERT INGREDIENTS	<u>5.78%</u>
	100.00%

*Equivalent to 5.45% Technical Pentachlorophenol as defined by Federal Specification TT-W 570

RECOMMENDED USE

Arbors, doors, fence pickets, fence posts, fence rails, porches, shingles, steps, window frames, sub flooring and trellises. Termites will not attack wood treated with **STAA-CLEAR WR**. Powder post beetles are killed by application of this preservative and they will not attack treated wood. **STAA-CLEAR WR** prevents blue stain decay and insect attack on wood, in addition to controlling warping, swelling, shrinking which result from changes in moisture content with time. Wood treated with this water repellent wood preservative requires less paint than treated wood.

NON-WARRANTY

Seller makes no representation or warranty concerning this product except as directed and recommended above and that it meets the ingredient statement. Buyer assumes all risks of use and handling except when used or handled in strict accordance with the recommendations, directions and warnings stated on this label.

DIRECTIONS FOR USE

Best results are obtained by dipping wood for three minutes or longer. If dipping is not practical, apply at least two liberal coats using a brush or spray applicator. Fence posts, poles, foundation timbers and heavy wooden members should be free of bark, dry and well-seasoned immersed in the product for a period of 12 to 48 hours to be an effective wood preserver. Allow at least one hour between applications for drying. Allow at least 24 hours or longer after application of preservative before painting.


All interior trim, as well as millwork, should be given a three minute dip treatment in areas where dry wood termites are present.

Care should be taken in disposal of empty containers to avoid contamination of the environment or potential harm to humans or animals. It is recommended that they be burned or rinsed before disposal with rinsing solvent disposed of in a closed drain.

WARNING KEEP OUT OF REACH OF CHILDREN!

- Do not apply near open flame!
- May be fatal if swallowed!
- Harmful if absorbed through skin!
- Do not breathe vapor or spray mist!
- Avoid contact with eyes or skin or clothing!
- Wash thoroughly after handling!
- Avoid contamination of feed or food stuffs!
- Wear rubber gloves when treating freshly treated lumber!

- CLEAR
- PAINTABLE
- STOPS ROT
- WATER REPELLENT
- KILLS TERMITES

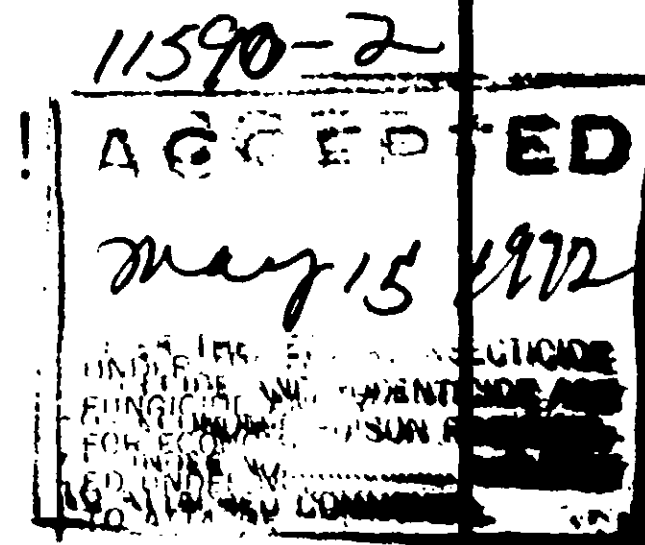

ACCEPTED WITH COMMENTS

EPA Reg. No. 11590-2

REVICO, INC. MEMPHIS, TENNESSEE