


ACCEPTED

FEB 10 1975

Under the Federal Insecticide,
Fungicide, and Rodenticide Act,
as amended, for the pesticide
registered under
EPA Reg. No. 33576-19

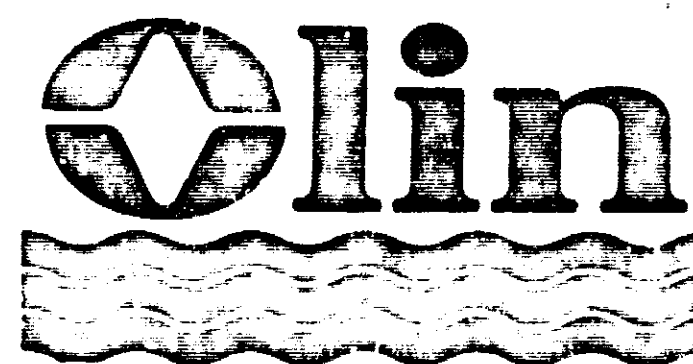

WATER SERVICES

55 gal/drum 500 lbs Net

OLIN 3300

EPA Est. No.
33576-CA-1
33576-KS-1
33576-NY-1

Algicide for industrial cooling water reservoirs

OLIN 3300 is a non-oxidizing type algicide especially designed for control or prevention of algae growth in large reservoir type industrial recirculating cooling water systems.

RECOMMENDATIONS FOR USE: Begin treatment when the system is in jeopardy of becoming affected or after cleaning if the efficiency of the system is already impaired. Badly fouled systems must be cleaned before treatment is begun.

INITIAL DOSAGE: Add 1 1/2 pint of OLIN 3300 for each 1,000 gallons of water in the system. Divide dosage and add it at a number of points around the reservoir to promote uniform mixing with the water. Repeat dosage until control is achieved.

SUBSEQUENT DOSAGE: When algae control is evident, add 1/6 pint of OLIN 3300 for each 1,000 gallons of water in the system every week or as needed to maintain control.

ACTIVE INGREDIENTS: Cupric Acetate 8%

INERT INGREDIENTS 92%

CAUTION

Keep Out of Reach of Children

Avoid contact with eyes, skin or clothing. Harmful if swallowed.

FIRST AID: In case of contact, wash skin with plenty of water. Flush eyes for at least fifteen minutes and get medical attention. In case of swallowing, give a tablespoon of salt in glass of warm water. Repeat until vomit is clear. Call a physician.

IF POSSIBLE, STIR CONTENTS OF BARREL BEFORE WITHDRAWING EACH DOSAGE.

Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place away from water supplies.

EPA REG. NO. 33576-19-AA-53817

374

FOR INDUSTRIAL USE ONLY

lb. Net Wt.

Olin WATER SERVICES

Olin Corporation

Kansas City, Kansas 66115

Stamford, Conn. 06904