
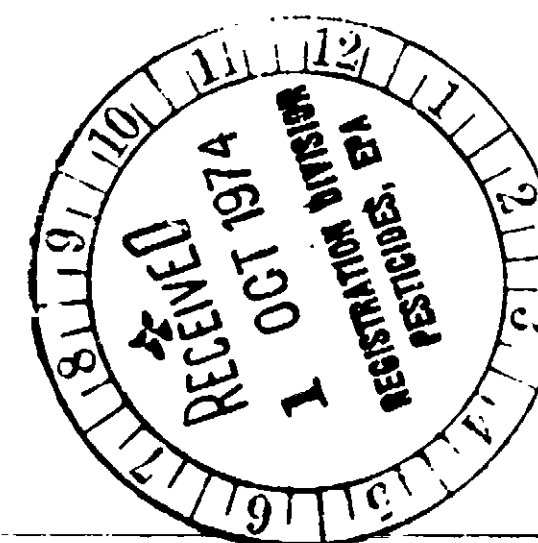
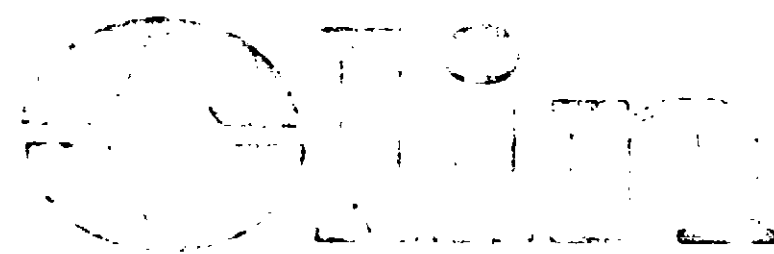


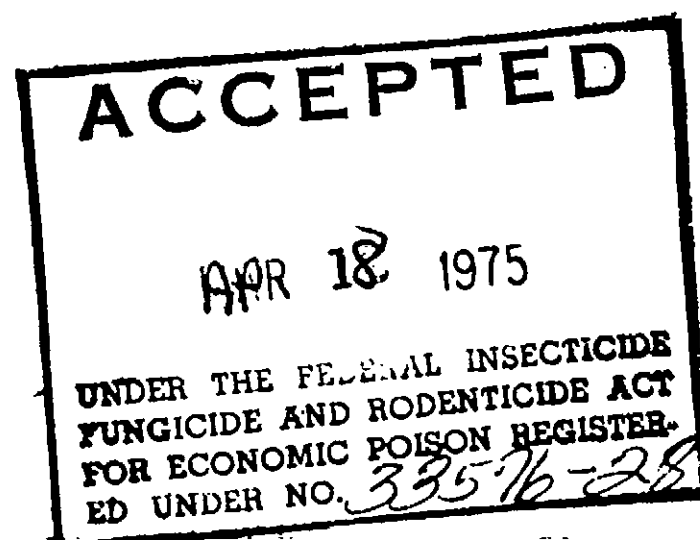

OLIN 3205

EPA Est. No.
33576-CA-1
33576-KS-1
33576-NY-1

Water treatment microbiocide for building and industrial cooling towers

OLIN 3205 will control algae and bacterial slimes found on circulating cooling tower walls. Olin 3205 helps clean and keeps slime debris from clogging system surfaces.

OLIN 3205 is economical to use because it is concentrated. It should be handled with care.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds or public water.

Do not reuse empty drum. Return to drum conditioner or liner with soap solution and discard. Do not contaminate water by disposal of waste.

USE DIRECTIONS

Circulating systems must be cleaned before treatment is begun.

To control algae and bacterial slimes, use OLIN 3205 as directed. For best results, slug feed. The frequency of application will depend on the severity of the problem. For more information, see the use of Olin 3205, following this procedure.

1. Initially, use 33.33 ounces per 1,000 gallons of water to be treated. Repeat at 7-day intervals.

Should the above dosage not give satisfactory results, use 66.66 ounces per 1,000 gallons of water.

Repeat the initial dose every seven days or increase the frequency if needed.

2. When the above treatment cycle is successful, use 8 to 12 ounce ounces per 1,000 gallons of water to maintain efficiency. Repeat weekly as needed.

Should some algae or slimes go back to initial dosage.

Cooling tower waters that are alkaline or low in plant growth and bacteria count may be adequately controlled by the lower range of these dosages; slug feed every seven days.

Dilute the approximate amount of OLIN 3205 in 1 or 2 gallons of water then add to the sump of the tower.

Note: This product weighs 7.9 lbs. per gallon (at 20° C).

ACTIVE INGREDIENTS:

Diethyl dimethyl ammonium chloride	10.5%
Isopropyl alcohol	5.0%
Water	84.5%

EPA Reg. No. 33576-28

FOR INDUSTRIAL USE ONLY

DANGER

Keep Out of Reach of Children

Corrosive. Causes severe eye and skin damage. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Wash thoroughly if contact is made. Avoid contamination of food.

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, drink plenty of a large quantity of milk or white gelatin solution or if these are not available, drink large quantities of water. Wash mouth out with water. Call a physician immediately.

NOTE TO EMPLOYER: Probable mucous damage to the respiratory tract. Use of gastric lavage. Treatment against difficulty, shock, respiratory depression and convulsion may be needed.