
DO NOT PUNCTURE JUG OR CAP NON-RETURNABLE IF MUTILATED



WBU WAL

WAL-BEN INDUSTRIES, INC. SPRINGFIELD, MA 01104

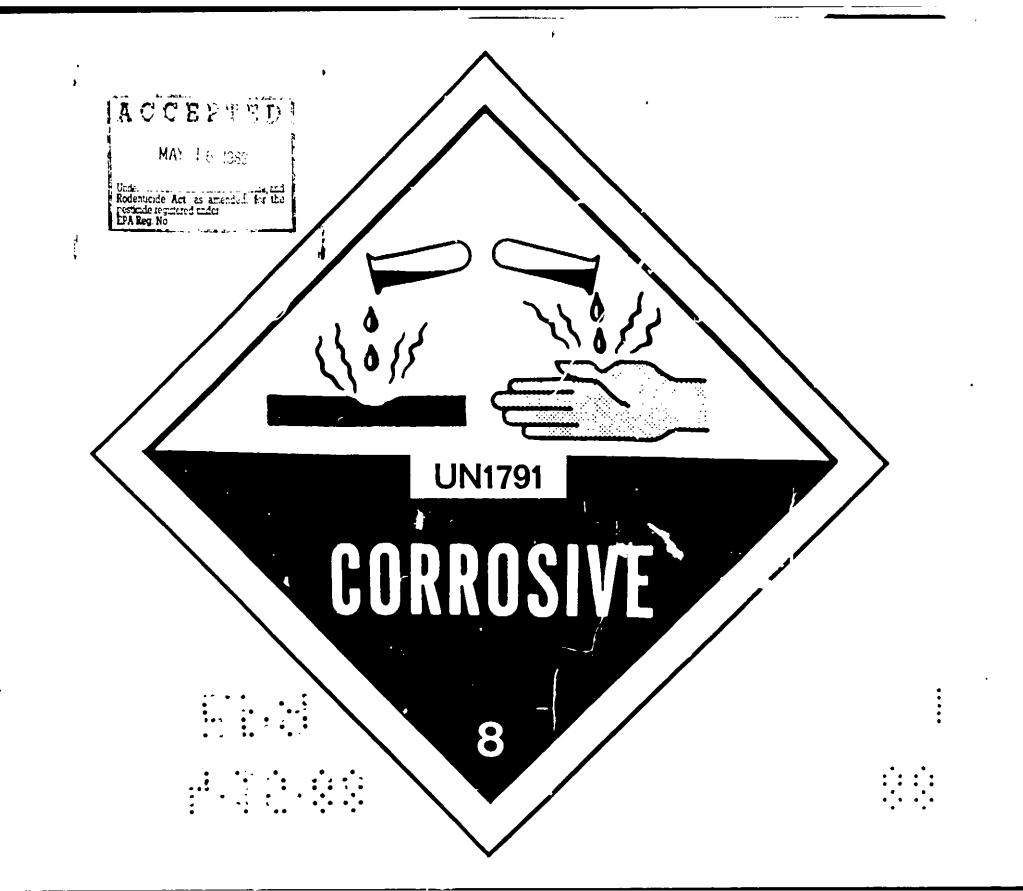

DANGER: Keep Out Of Reach Of Children DIRECTIONS FOR USE

FOR WALLS, FLOORS, PORCELAIN: If dirty, preclean. Disinfect surfaces with a solution of 2 ounces SUPER-CHLOR in 3 gallons water (600 ppm available chlorine). Apply with mop or cloth. Allow solution to stand 10 minutes and rinse with clear water. Do not use on steel, aluminum, silver, nor apply with natural sponge.

FOR SANITIZING DISHES, TABLEWARE, and BEERMUGS in restaurants and bars: Preclean in the normal way. Then immerse all surfaces in a freshly prepared solution of 2 ounces SUPER-CHLOR in 9 gallons water (provides 200 ppm available chlorine). Keep in solution for at least 2 minutes or contact time specified by local regulations, and allow to air-dry without a potable water rinse. Do not use on steel, aluminum, silver, nor apply with natural sponge.

PUBLIC & SEMIPUBLIC POOLS: Follow State and Local Health Regulations regarding use of positional displacement feeders and maintenance of acceptable chlorine residual.

NOTE: This product degrades with age. Use a chlorine test kit and increase dosage, as necessary, to obtain the required level of available chlorine.

PRECAUTIONARY STATEMENTS HAZARDS TO HU.MANS AND DOMESTIC ANIMALS

DANGER: Corrosive, may cause severe skin irritation or chemical burns to broken skin. Causes eye damage. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber groves when handling this product. Wash after handling. Avoid breathing vapors. Vacate poorly ventilated areas as soon as possible. Do not return until odors have dissipated.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. Keep out of lakes, streams or ponds. Treated effluent cannot be discharged into lakes, streams, ponds or public waters unless a discharge permit is obtained. For guidance, contact the regional office of the Environmental Protection Agency.

PHYSICAL AND CHEMICAL HAZARDS: STRONG OXIDIZING AGENT: Mix only with water according to label directions. Mixing this product with gross filth such as feces, urine, etc., or with ammonia, aclds, detergents or other chemicals will release hazardous gases irritating to eyes, lungs and mucous membranes.

STORAGE AND DISPOSAL: Store this product in a cool dry area, away from direct sunlight and heat to avoid deterioration. In case of spill, flood areas with large quantifies of water. Product or rinsates that cannot be used should be diluted with water before disposal in a sanitary sewer. Do not reuse empty container but place in trash collection. Do not contaminate food or feed by storage, disposal or cleaning of equipment.

This is to certify that the content of this package is properly described by pame and is packed and marked and is in proper condition for transportation according to the regulations prescribed by the Department of Transportation.

3

DANGER: Keep Out Of Reach Of Children

FIRST AID: If on skin, wash with plenty of soap and water. If in eyes, flush with water for at least 15 minutes. Get medical attention. If swallowed, drink large quantities of milk, or gelatin solution, or if these are not available, drink large quantities of water. Do not give vinegar or other acids. Do NOT induce vomiting. Get prompt medical attention.

DIRECTIONS FOR USE

FOR PRIVATE POOLS: Daily dosage should be carried out in the early morning or late evening. Pools with a high bathing load or exposed to high temperatures or strong sunlight will require extra dosing. A constant check for chlorine residual should be made and additions made as needed to maintain 0.6 to 1.0 ppm residual chlorine. For effective chlorination, the pH of the water should be maintained to the 7.2 to 7.6 range.

INITIAL CHLORINATION: Four fluid ounces of SUPER-CHLOR per 1,000 gallons of pool water is recommended whenever the pool is emptied and refilled. After initial treatment, allow to circulate in pool. Check chlorine residual. Do not use pool until residual is between 1.0 and 3.0 ppm as determined by a test kit.

REGULAR TREATMENT: Use 32 fluid ounces of SUPER-CHLOR per 10,000 gallons of pool water every day, even if the pool is not used. Pool should be treated as needed to maintain 0.6 to 1.0 ppm residual chlorine. Do not use pool until residual is between 1.0 and 3.0 ppm as determined by a test kit.

SUPERCHLORINATION: SUPER-CHLORination is recommended every other week — more often during heavy use periods. Use SUPER-CHLOR at rate of 1 gallon per 20,000 gallons of pool water. Apply in evening after pool has been closed. SUPER-CHLORination is needed for algae control when continuous chlorine residuals have not been maintained and to destroy ammonium complexes that have formed in the pool. Do not use pool until residual is between

: 1.0 and;3.0 ppm as determined by a test kit.

NOTE: This product degrades with age. Use a chlorine test kit and increase dosage, as necessary, to obtain the required level of available chlorine.

FIVE GALLONS EPA EST. NO. 034743-MA-01 EPA REG. NO. 34743-1