

 <p>U.S. ENVIRONMENTAL PROTECTION AGENCY Office of Pesticide Programs Antimicrobials Division (7510C) 1200 Pennsylvania Avenue NW Washington, D.C. 20460</p> <p>NOTICE OF PESTICIDE: <u> x </u> Registration <u> </u> Reregistration</p> <p>(under FIFRA, as amended)</p>	EPA Reg. Number: 44891-14	Date of Issuance: JUN 14 2006
	Term of Issuance: Expiration Date: 6-30-07	
	Name of Pesticide Product: Sea Hawk Premium Quality Cukote Biocide Plus Slime Resistant Antifouling Coating	
Name and Address of Registrant (include ZIP Code): New Nautical Coating, Inc. 14805 49 th Street North Clearwater, FL 33762		
<p>Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.</p>		
<p>On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act.</p> <p>Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.</p> <p>This product is conditionally registered in accordance with FIFRA sec 3(c)(7)(A) provided that you:</p> <ol style="list-style-type: none"> 1. Submit and/or cite all data required for registration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for re-registration of your product under FIFRA section 4. 2. This is a time-limited registration. The Agency is still in the process of completing the Environmental Risk Assessment need to support the antifouling use pattern. The Agency is now extending your time-limited to June 30, 2007 		
Signature of Approving Official:  Marshall Swindell Product Manager Team-33 Regulatory Management Branch I Antimicrobials Division (7510P)		Date: JUN 14 2006

3. This conditional registration will expire automatically on June 30, 2007. If you fail to satisfy the conditions imposed in the registration, EPA may issue a Notice to Cancel under Section 6 (e) of FIFRA.
4. Submit three (3) copies of your final printed labeling before distributing or selling the product bearing the revised labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

Sincerely,

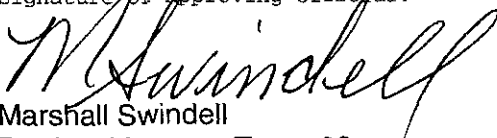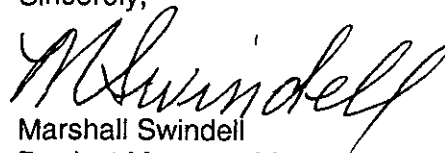

Marshall Swindell
Product Manager 33
Regulatory Branch I
Antimicrobials Division (7510C)

3/7

[FRONT PANEL]

ACCEPTED
with COMMENTS
in EPA Letter Dated

JUN 14 2006

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No.

44891-14

Sea Hawk

(Picture of Sea Hawk here)

Yacht Finishes

PREMIUM QUALITY

CUKOTE BIOCIDES PLUS SLIME RESISTANT

Antifouling Coating

[Optional proposed text appears in brackets - the final label may include some or all of the optional text]

[Paint Color and Number]

ACTIVE INGREDIENT:	
Cuprous Oxide	47.57%
N-Cyclopropyl-N'-(dimethylethyl)-6-(methylthio)- 1,3,5-triazine-2-diamine	2.00%
OTHER INGREDIENTS:	<u>50.43%</u>
TOTAL:	100.00%

KEEP OUT OF REACH OF CHILDREN

WARNING

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

LIMITED WARRANTY: The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty for this product, expressed or implied.

4/7

[FRONT SIDE PANEL]

Net Contents
1 Gallon
U.S. Measure
3.785 Liters

NEW NAUTICAL COATINGS, INC.
14805 49th Street North
Clearwater, FL 33762
www.seahawkpaints.com

ACCEPTED
with COMMENTS
in EPA Letter Dated:

JUN 14 2006

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended for the pesticide,
registered under EPA Reg. No.

77891-14

5/7

[BACK PANEL]

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL DESCRIPTION

Ablative, self-polishing antifoulant. This product is designed to control barnacles, algae and other marine foulings in salt or fresh water. This product is designed for use on the surfaces of hulls on ships, boats, barges, yachts, or running gear.

Shake vigorously for several minutes with a mechanical paint shaker before use. Due to the settlement of copper in the product if this product is not properly shaken it will become ineffective.

APPLICATION DETAILS

Apply product generously on the surface to be coated. More coats will ensure a longer life. Do not apply product during moist conditions such as rain or high humidity. Wait at least 12 hours before submerging in water.

Sweat In Time:	Not Applicable
Thinner:	Sea Hawk 2033-2035
Cleaner:	Sea Hawk Xylene 7130

REGULATORY DATA

VOC: 288 Grams/Liter

LIMITATIONS: Apply in good weather when air and surface temperature are above 50° F (10° C). Surface temperature must be at least 50° F (10° C) above dew point. For optimum application properties, bring material to 70-80° F (21-27° C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40 and 100° F (4-38° C). Prolonged atmospheric exposure of this product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating application procedures. See published data sheets for more specific application data. As application, environment and design factors can vary significantly, due care should be exercised in the selection, verification of performance and use of the coating.

SURFACE PREPARATION: Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing. (SSPC-SP1)

APPLICATION: This product can be applied by brush, roller, or spray.

ACCEPTED
with COMMENTS
in EPA Letter Dated:

JUN 14 2006

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended by the pesticide
registration under EPA Reg. No.

44891-14

6/7

[BACK PANEL CONTINUED]

THINNING: We do not recommend thinning. If necessary thin no more than 10% by volume with 2033 or 2035.

CLEANUP: Clean all equipment immediately after using with Sea Hawk Xylene 7130.

SAFETY: Read and observe all precautionary statements on this label.

STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage of disposal.

STORAGE: Do not store near open heat or flame. Store in well ventilated area.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by the use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING. Causes eye irritation. Harmful if absorbed through skin. Avoid Contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sandblasting boat surfaces wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Use with adequate ventilation.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposing of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the

REGISTERED
PAIN REMOVER
IN EPA REG. NO. 7130

JUN 14 2006

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended for the purposes,
registered under EPA Reg. No.

44891-74

[BACK PANEL CONTINUED]

permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL AND CHEMICAL HAZARDS

Combustible. Do not use or store near open flame.

FIRST AID	
If in eyes	• Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice.
If swallowed	• Call poison control center or doctor immediately for treatment advice. • Have person sip a glass of water if able to swallow. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give anything by mouth to an unconscious person.
If on skin or clothing	• Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15-20 minutes. • Call a poison control center or doctor for treatment advice.
If inhaled	• Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. • Call a poison control center or doctor for further treatment advice.
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-528-0997 for emergency medical treatment information.	
NOTE TO PHYSICIAN: Probably mucosal damage may contraindicate the use of gastric lavage.	

EPA Reg. No. 44891-14

JUN 14 2006

EPA Est. No. 44891-FL-1

Under the Federal Insecticide, Fungicide, and Rodenticide Act, this pesticide is registered under EPA Reg. No. 44891-14

REVISED: 06-04-03

S:MAIN NEW NAUTICAL COATINGS, INC. LABELS SEA HAWK CUKOTE BIOCIDE PLUS SLIME RESISTANT