

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460



United States
Environmental Protection
Agency

Office of Pesticide Programs

APR 14 2011

New Nautical Coatings, Inc.
14805 49th Street North
Clearwater, FL 33762

Attention: Erik Norrie, CEO

Subject: Sea Hawk Misson Bay Copper-Free Antifouling Coating
EPA Registration No. 44891-16
Amendment Dated January 19, 2011

The amendment, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act (FIFRA), as amended, is acceptable.

Proposed Amendment

- To revise the Precautionary Statement section on the product label

Conditions

Revise the "Storage and Disposal section in accordance with PR Notice 2007-4

General Comment

A stamped copy of the "accepted" label is enclosed for your records.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely,

Marshall Swindell
Product Manager (33)
Regulatory Management Branch 1
Antimicrobials Division (7510P)


Enclosure

ACCEPTED
with COMMENTS
EPA Letter Dated:

APR 14 2011
Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No. 44891-16

Sea Hawk

Yacht Finishes

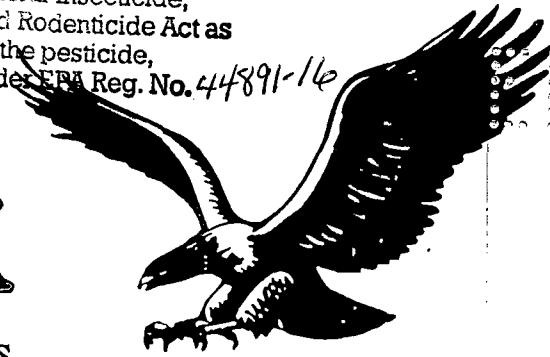

PREMIUM QUALITY

Mission Bay

Copper-Free Antifouling Coating

ACTIVE INGREDIENT: Zinc Omadine	3.80%
OTHER INGREDIENTS:	96.20%
TOTAL	100.00%

*contains petroleum distillates, xylene or xylene range aromatic solvents.

KEEP OUT OF REACH OF CHILDREN
DANGER

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS AND FIRST AID STATEMENT.

LIMITED WARRANTY: The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty for this product, expressed or implied.

Net Contents
1 Gallon
U.S. Measure
3.785 Liters

NEW NAUTICAL
COATINGS, INC.
14805 49th Street North
Clearwater, FL 33762
www.seahawkpaints.com

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL DESCRIPTION

Ablative, self-polishing antifoulant. This product is designed to control barnacles, algae and other marine foulings in salt or fresh water. This product is designed for use on the surfaces of hulls on ships, boats, barges, yachts, or running gear.

Shake vigorously for several minutes with a mechanical paint shaker before use. Due to the settlement in the product if this product is not properly shaken it will become ineffective.

SHAKE VIGOROUSLY FOR A MINIMUM OF 10 MINUTES BEFORE APPLICATION

PRODUCT INFORMATION

Finish/Sheen: Semi-Gloss
Converter: One Pack
Volume Solids: 45% ± 2%
Mix Ratio: One Pack
Shipping Weight: 12-13 Lbs./Gal.
Flash Point: 100°F
Film Thickness: 6 mils wet equals 2.7 dry per coat

Recommended Coats: 3
Theoretical Coverage: 267 Sq. Ft./Gal. @ recommended film thickness

APPLICATION DETAILS

Sweat-In Time: Not Applicable
Thinner: 2033-2035
Cleaner: Sea Hawk Xylene 7130

Overcoating Interval

Drying Time (Hrs)

Substrate Temp.	Touch	Min.	Max.	Launch
73°F (23°C)	2 Hr	1 Hr	N/A	12 Hrs
95°F (35°C)	1 Hr	1 Hr	N/A	12 Hrs

Consult with your Sea Hawk representative for the system best suited for surfaces to be protected.

REGULATORY DATA

VOC: 298 Grams/Liter

LIMITATIONS: Apply in good weather when air and surface temperature are above 50° F (10° C). Surface temperature must be at least 50° F (10° C) above dew point. For optimum application properties, bring material to 70-80° F (21-27° C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40 and 100° F (4-38° C). Prolonged atmospheric exposure of this product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating application procedures. See published data sheets for more specific application data. As application, environment and design factors can vary significantly, due care should be exercised in the selection, verification of performance and use of the coating.

SURFACE PREPARATION: Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing. (SSPC-SP1)

APPLICATION: This product can be applied by brush and roller.

THINNING: We do not recommend thinning. If necessary thin no more than 10% by volume with 2033 or 2035.

CLEANUP: Clean all equipment immediately after using with Sea Hawk Xylene 7130.

SAFETY: Read and observe all precautionary statements on this label.

STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.
STORAGE: Do not store near open heat or flame. Store in well ventilated area.
PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by the use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.
CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS KEEP OUT OF REACH OF CHILDREN

CORROSIVE: Causes irreversible eye damage. Harmful if swallowed or absorbed through the skin. May be fatal if inhaled. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Do not get in eyes or on skin or on clothing. Do not breathe vapor or spray mist. Wash thoroughly after handling with soap and water, and before eating, drinking or using tobacco. Remove contaminated clothing and wash clothing before reuse. When mixing and loading, or cleaning equipment wear a chemical resistant apron.

RESIDENTIAL PPE: Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses or face shield); long-sleeved shirt and long pants, socks, and shoes. While removing existing paint by sanding or blasting, or applying new paint by brush or roller, it is advised to wear a respirator with an organic vapor removing cartridge with a pre-filter approved for pesticides. (MSHA/NIOSH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NIOSH approval number TC-14G), or a NIOSH approved full face respirator with an organic vapor removing cartridge with a P-100 pre-filter.

COMMERCIAL PPE: Users must wear a disposable coverall with hood, chemical resistant gloves, protective eyewear (goggles, safety glasses or face shield), long sleeved shirt and long pants, socks, and chemical resistant footwear. While removing existing paint by sanding or blasting, or applying new paint, user must wear a respirator with an organic vapor removing cartridge with a pre-filter approved for pesticides (MSHA/NIOSH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NIOSH approval number TC-14G), or a NIOSH approved full face respirator with an organic vapor removing cartridge with a P-100 pre-filter.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposing of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL AND CHEMICAL HAZARDS

Combustible. Do not use or store near open flame.

FIRST AID	
IF INHALED:	• Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. • Call a poison control center or doctor for further treatment advice.
IF ON SKIN OR	• Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15-20 minutes. • Call a poison control center or doctor for treatment advice.
IF IN EYES:	• Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice.
IF SWALLOWED:	• Call poison control center or doctor immediately for treatment advice. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give any liquid to the person • Do not give anything by mouth to an unconscious person.
IN CASE OF EMERGENCY CALL: 800-424-9300	
NOTE TO PHYSICIAN: Probably mucosal damage may contraindicate the use of gastric lavage.	

E.P.A. Registration No. 44891-16/ E.P.A. Establishment No. 44891-FL-1

ACCEPTED
with COMMENTS
EPA Letter Dated:

APR 14 2011

per the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No.

44891-16

2/3