



U.S. ENVIRONMENTAL PROTECTION AGENCY
 Office of Pesticide Programs
 Antimicrobials Division (7510P)
 1200 Pennsylvania Ave., N.W.
 Washington, D.C. 20460

EPA Reg. Number:

60061-101

Date of Issuance:

5/14/2015

NOTICE OF PESTICIDE:

Registration
 Reregistration
 (under FIFRA, as amended)

Term of Issuance:

Unconditional

Name of Pesticide Product:

Pettit Marine Paint Horizons
 Ablative Antifouling Bottom Paint

Name and Address of Registrant (include ZIP Code):

Kop-Coat, Inc.
 436 Seventh Avenue
 Pittsburgh, PA 15219

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Antimicrobials Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act (FIFRA), as amended. Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on her/his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

EPA received a label amendment request submitted by email on May 7, 2015. EPA grants this request under the authority of section 3(c)(5) of FIFRA, as amended. With this accepted labeling, all requirements set forth in the Reregistration Eligibility Decision for cuprous oxide have been satisfied. Therefore, EPA reregisters the product listed above. This action is taken under the authority of section 4(g)(2)(c) of FIFRA, as amended. Reregistration under this section does not eliminate the need for continual reassessment of pesticides. EPA may require submission of data at any time to maintain the registration of your product.

Submit one (1) copy of final printed labeling. Amended labeling will supersede all previously accepted labels. A copy of your label stamped "Accepted" is enclosed for your records. Products shipped after 12 months from the date of this Notice or the next printing of your label, whichever occurs first, must bear the new revised label.

Signature of Approving Official:

John Hebert, Chief
 Regulatory Management Branch I, Antimicrobials Division
 (7510P)

Date:

5/14/2015


Page 2 of 2
EPA Reg. No. 60061-101
Decision No. 453664

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6. Your release for shipment of the product constitutes acceptance of these conditions. A stamped copy of the label is enclosed for your records.

Please also note that the record for this product currently contains the following CSFs:

- Basic CSF (Blue) dated 08/06/2014
- Alternate CSF 1 (Red) dated 07/27/2000
- Alternate CSF 2 (Black) dated 07/27/2000
- Alternate CSF 3 (Green) dated 07/27/2000

If you have any questions, please contact Seiichi Murasaki at murasaki.seiichi@epa.gov.

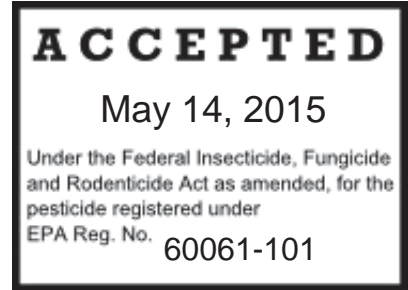

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of Pettit Paint Company, including surface preparation, proper application and environmental conditions. Therefore, Pettit Paint Company cannot guarantee this product's suitability for your particular purpose of application. Implied warranties of fitness for a particular purpose and of merchantability are excluded. Pettit Paint Company shall not under any circumstances be liable for incidental or consequential damages. By purchase or use of This product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Pettit Paint's option.

HORIZONS®

ABLATIVE ANTIFOULING BOTTOM PAINT

- **High Copper Content.**
- **Multi-Season Protection.**
- **Self-Polishing.**
- **Eliminates Paint Build-Up and Heavy Sanding.**
- **Excellent for Fiberglass, Steel or Wood Boats.**

NET CONTENTS
1 GAL. (128 FL. OZ.)
3.785 LITERS

COMMERCIAL AND NON-COMMERCIAL USE
KEEP OUT OF REACH OF CHILDREN
DANGER

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

ACTIVE INGREDIENT:	
Cuprous Oxide* (CAS # 1317-39-1)	47.50%
OTHER	52.50%
INGREDIENTS:	
Total	100.00%
*Metallic copper equivalent	42.10%

This product contains petroleum distillates.

EPA EST. NO. 60061-NJ-2
EPA REGISTRATION NO. 60061-101

KOP-COAT, INC.
36 PINE STREET
ROCKAWAY, NJ 07866

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

DANGER: Corrosive. Causes irreversible eye damage. Causes skin irritation.. Harmful if absorbed through skin. Do not get in eyes, on skin or on clothing. Wear protective eye gear, goggles or a face shield. Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. Harmful if swallowed or inhaled. Do not breathe vapors, spray mist or sanding dust. Remove contaminated clothing and wash clothing before reuse. Wash thoroughly with soap and water after handling.

FIRST AID	
IF IN EYES:	<ul style="list-style-type: none"> • Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice.
IF SWALLOWED :	<ul style="list-style-type: none"> • Call a poison control center or doctor immediately for treatment advice. • Do not give any liquid to the person. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give anything by mouth to an unconscious person.
IF ON SKIN OR CLOTHING:	<ul style="list-style-type: none"> • Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15-20 minutes. • Call a poison control center or doctor for treatment advice.
IF INHALED:	<ul style="list-style-type: none"> • Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible.
<ul style="list-style-type: none"> • Call a poison control center or doctor for further treatment advice. 	
HOT LINE NUMBER	
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-548-0489 for emergency medical treatment information.	
NOTE TO PHYSICIAN	
Contains petroleum distillate. Vomiting may cause aspiration pneumonia. Probable mucosal damage may contraindicate the use of gastric lavage.	

ENVIRONMENTAL HAZARDS

This material is toxic to fish and aquatic invertebrates. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent into sewer system without previously notifying the local sewage treatment plant authority. For guidance contact you State Water Board or Regional Office of the EPA **PHYSICAL OR CHEMICAL HAZARDS: FLAMMABLE!** Keep away from heat, sparks and open flame. Use only with adequate ventilation during mixing, application and drying. Use absorbent clean-up material if spilled. For fires, blanket flames with foam, CO2 or dry chemical. Wear MSHA/NIOSH certified breathing equipment.

STORAGE & DISPOSAL

Do not contaminate water, food, or feed by storage or disposal. Open dumping is prohibited. Pesticide Storage: Store in a closed, properly labeled container in a cool place. Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb and dispose of in accordance with local applicable regulations. Pesticide Disposal: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance. Container Disposal: Non-refillable container. Do not reuse or refill this container. Prior to container disposal, allow any remaining paint residue in the container to air dry. Dispose of the container in accordance with Federal, State or local disposal regulations.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling. Product Description: This product is an abrasive antifouling coating designed to polish away at a controlled rate, constantly exposing a fresh surface which provides excellent season-long antifouling protection. The high loading of cuprous oxide in the formula enables the paint to perform well in even the most severe fouling areas. The controlled erosion minimizes coating buildup and keeps underwater surfaces smooth and clean. This product may be applied on fiberglass, wood and properly primed steel boats.

Compatibility: This product may be applied over most aged hard antifouling coatings and over most copper-based ablative antifouling coatings. Old soft antifouling paints must be completely removed before applying this product.

Mixing: This product is heavily loaded with cuprous oxide. As a result of this loading there is a tendency for settling to occur especially if the paint has been on the shelf for several months. It is necessary to thoroughly mix the paint before using. If possible shake the can of paint on a mechanical paint shaker. Before using check the sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, pour off half of the liquid from the top of the can into another can and then properly mix in any settled pigment, then remix the two parts together thoroughly.

Application Temperatures: 50°F and above.

Application Method: Brush, roller or spray.

Thinner: Thinning this product is not normally required. If thinning is necessary, use Pettit 185 ACP Thinner only. Do not thin more than 10% by volume (12 ounces per gallon), or inadequate paint film thickness may result in premature erosion of the finish.

Coverage: This product covers approximately 400 square feet per gallon.

Number of Coats: For best antifouling protection at least two full coats of this product are recommended for the first years protection. It is a good idea for the first coat to be painted in a different color from the top coats. As the topcoat wears away, the base color will start to show through, signaling that it will soon be time to haul and repaint.

Dry Times:	To recoat	To launch
90°F	3 hours	8 hours
70°F	6 hours	16 hours
50°F	12 hours	24 hours

The above dry times are minimums. This product may be recoated and launched after minimum times shown.

There is no maximum dry time before launching.

VOC: Less than 330 g/l unthinned

Maintenance Of Antifouling Paint: No antifouling paint can be effective under all conditions of exposure. Man-made pollution and natural occurrences can adversely affect antifouling paint performance. Extreme hot and cold water temperatures, silt, dirt, oil, brackish water and even electrolysis can ruin an antifouling paint. Therefore, we strongly suggest that the bottom of the boat be checked regularly to make sure it is clean and that no growth is occurring. Lightly scrub the bottom with a soft brush to remove anything from the antifouling paint surface. Scrubbing is particularly important with boats that are idle for extended periods of time. The self-cleaning nature of the coating is most effective when the boat is used periodically.

PAINT SYSTEMS

The paint systems outlined below contain references to other Pettit products. Please read and understand the label and/or Technical Bulletin for these products as well to ensure that they are used properly. For further guidance, please contact your local Pettit salesman or Pettit Customer Service Department at (800) 221-4466 between the hours of 8:30 a.m. and 4:30p.m. EST.

Previously Painted Surfaces: If the previous coating is in good condition thoroughly sand with 80 grit production paper and wipe clean with a rag dampened with Pettit 185 ACP Thinner to remove sanding residue.

Apply two coats of this product observing the proper dry times. If the previous coating is soft or in poor condition, remove to the bare surface by sanding or using paint and varnish remover. Proceed with the appropriate bare system as described below. Old tin copolymer paints must be removed before applying this product.

Bare Fiberglass: All bare fiberglass, regardless of age, must be thoroughly cleaned using Pettit 95 Fiberglass Dewaxer and clean lint-free rags. Several cleanings may be necessary to ensure complete removal of contaminants. Change rags frequently during the dewaxing/cleaning process to ensure complete removal of contaminants rather than merely smearing them on the surface. New boats must be scrubbed with a detergent and water solution and rinsed with fresh water prior to dewaxing. After the surface has been dewaxed, sand it thoroughly with 80 grit production paper and rewash the sanded surfaces with Pettit 95 Fiberglass Dewaxer or 120 Brushing Thinner to remove sanding residue. Apply two coats of this product observing the proper dry times. If sanding is prohibited, as with certain vinyl-ester gelcoats, or is otherwise impractical, make sure the surface has been completely and thoroughly dewaxed and cleaned with Pettit 95 Fiberglass Dewaxer. Then apply one thin continuous coat of Pettit

6999 Sandless Primer. Topcoat with two coats of this product carefully following the topcoating instructions on the Sandless Primer label.

Bare Wood: Sand the entire surface with 80 grit production paper and wipe clean with a rag dampened with Pettit 185 ACP Thinner. Apply a coat of this product thinned 5% with Pettit 185 ACP Thinner to penetrate and seal the wood. Fill any open seams with Pettit Seam Compound and allow to dry overnight. Apply two full coats of this product observing the proper dry times.

Steel Hulls, Underwater Metal Parts and Keels: For steel hulls and metal keels, consult Pettit Technical Bulletin TB431 High Build Epoxy Primer for complete priming instructions or consult the Pettit Technical Department or your local Pettit representative. For underwater metal parts, consult Technical Bulletin TB112 Underwater Running Gear Painting Specification for complete priming and application details.

DO NOT USE TWS PRODUCT ON ALUMINUM HULLS OR OUTDRIVES

Warranty: We guarantee this material to comply with our published specifications. Since the use of this material is beyond our control, we disclaim responsibility for its handling, use, storage, the results obtained or any injury or damage of any nature resulting therein.

MEDICAL EMERGENCIES: 1-800-548-0489

Made in U.S.A. P3257 GA-9/13

PRODUCT INFORMATION: 1-800-221-4466 or WWW.PETTIT_PAINT.COM