



U.S. ENVIRONMENTAL PROTECTION AGENCY  
Office of Pesticide Programs  
Antimicrobials Division (7510C)  
1200 Pennsylvania Avenue, N.W.  
Washington, D.C. 20460

EPA Reg. Number:

Date of Issuance:

60061-117

JUN 2 2005

Term of Issuance:

Expiration Date 06/15/06

NOTICE OF PESTICIDE:

X  Registration  
      Re-registration

Name of Pesticide Product:

Pettit Marine Paint  
Ultima Plus  
Antifouling Paint

(under FIFRA, as amended)

Name and Address of Registrant (include ZIP code):

Kop-Coat, Inc.  
436 Seventh Avenue  
Pittsburgh, PA 15219-1818

**Note:** Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Antimicrobials Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA Section 3(c)(7)(A) provided that you:


1. Submit and/or cite all data required for registration of your product under FIFRA Section 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for re-registration of your product under FIFRA Section 4, or as required by registration review under FIFRA Section 3(g).

2. Make the following labeling changes:

a. Revise the EPA Registration Number to read, "EPA Reg. No. 60061-117".

Signature of Approving Official:

Date:

*for*   
Marshall Swindell, Product Manager, Team 33,  
Regulatory Management Branch I, Antimicrobials Division

JUN 2 2005

page 2  
EPA Reg. No. 60061-117


3. Currently all end-use antifoulant paint formulations containing Irgarol are registered on a time limited basis. In order to allow the Agency time to review your supplier's response to the Agency's Environmental Risk Assessment for Irgarol. This conditional registration will expire automatically on June 15, 2006.

This conditional registration will expire automatically on June 15, 2006. If you fail to satisfy the conditions imposed in the registration, EPA may issue a Notice To Cancel under section 6 (e) of FIFRA.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA Section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.


If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6 (e). Your release of shipment of the product constitutes acceptances of these conditions.

Sincerely,

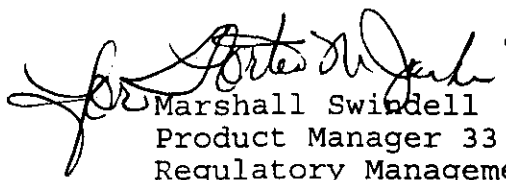

Marshall Swindell  
Product Manager 33  
Regulatory Management Branch 1  
Antimicrobial Division (7510C)

Enclosure

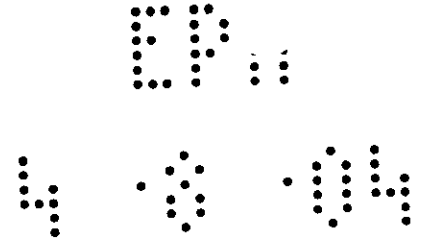

ACCEPTED  
with COMMENTS  
in EPA Letter Dated:

JUN 02 2005  
Under the Federal Insecticide,  
Fungicide, and Rodenticide Act as  
amended, for the pesticide,  
registered under EPA Reg. No.

64061-117

# Ultima Plus

## ANTIFOULING PAINT

- Slime resistant.
- Multi-season technology.
- Self-polishing.
- Reduces paint build-up through controlled erosion.
- Excellent for fiberglass, wood & steel boats.

**ACTIVE INGREDIENTS:**  
Cuprous Oxide 40.00%  
N-Cyclopropyl-N'(1,1-dimethylethyl)  
-6-(methylthio)-1,3,5 triazine-2  
4-diamine 2.00%  
**INERT INGREDIENTS:** 58.00%  
Total 100.00%

COPPER AS METALLIC 35.52%

This product contains petroleum distillates.

COMMERCIAL AND NON-COMMERCIAL USE  
KEEP OUT OF REACH OF CHILDREN  
**WARNING**

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

NET CONTENTS  
1 GAL. (128 FL. OZ.)  
3.785 LITERS

EPA EST. NO. 60061-NJ-2  
EPA REGISTRATION NO. 60061

KOP-COAT, INC.  
PETTIT PAINT BRAND  
ROCKAWAY, NJ 07866

An RPM Company

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

**WARNING:** Causes eye irritation. Harmful if absorbed through skin. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe vapors, spray mist or sanding dust. While spraying and/or sanding boat surfaces, wear a NIOSH/MSHA certified mask or respirator. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling. May pose an aspiration pneumonia hazard.

FIRST AID	
IF IN EYES:	<ul style="list-style-type: none"> <li>Hold eye open and rinse slowly and gently with water for 15-20 minutes.</li> <li>Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.</li> <li>Call a poison control center or doctor for treatment advice.</li> </ul>
IF SWALLOWED:	<ul style="list-style-type: none"> <li>Call a poison control center or doctor immediately for treatment advice.</li> <li>Have person sip a glass of water if able to swallow.</li> <li>Do not induce vomiting unless told to do so by a poison control center or doctor.</li> <li>Do not give anything by mouth to an unconscious person.</li> </ul>
IF ON SKIN OR CLOTHING:	<ul style="list-style-type: none"> <li>Take off contaminated clothing.</li> <li>Rinse skin immediately with plenty of water for 15-20 minutes.</li> <li>Call a poison control center or doctor for treatment advice.</li> </ul>
IF INHALED:	<ul style="list-style-type: none"> <li>Move person to fresh air.</li> <li>If person is not breathing, call 911 or an ambulance, and then give artificial respiration, preferably mouth-to-mouth, if possible.</li> <li>Call a poison control center or doctor for further treatment advice.</li> </ul>
HOT LINE NUMBER	
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-548-0489 for emergency medical treatment information.	
NOTE TO PHYSICIAN	
Contains petroleum distillates. Vomiting may cause aspiration pneumonia.	

**ENVIRONMENTAL HAZARDS**

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent into sewer treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**PHYSICAL OR CHEMICAL HAZARDS: FLAMMABLE!** Keep away from heat, sparks and open flame. Use only with adequate ventilation during mixing, application and drying. Use absorbent clean-up material if spilled. For fires, blanket flames with foam, CO<sub>2</sub> or dry chemical. Wear MSHA/NIOSH certified breathing equipment.

**STORAGE & DISPOSAL**

Do not contaminate water, food, or feed by storage or disposal. Open dumping is prohibited. **PESTICIDE DISPOSAL:** Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State or local disposal authorities.

**CONTAINER DISPOSAL:** Triple rinse (or equivalent) and dispose of in an approved landfill. Consult Federal, State or local disposal authorities for approved alternative procedures.

**WARNING: THIS PRODUCT CONTAINS A CHEMICAL KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM.**

**DIRECTIONS FOR USE**

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

**Product Description:** Pettit Marine Paint Ultima Plus Antifouling Paint is an abrasive antifouling coating designed to polish away at a controlled rate, constantly exposing a fresh surface which provides excellent season-long antifouling protection. The high loading of cuprous oxide in the formula enables the paint to perform well in even the most severe fouling areas. The controlled erosion minimizes coating buildup and keeps underwater surfaces smooth and clean. This product may be applied on fiberglass, wood and properly primed steel boats.

**Compatibility:** This product may be applied over most aged hard antifouling coatings and over most copper-based abrasive antifouling coatings. Old soft antifouling paints must be completely removed before applying this product.

**Mixing:** This product is heavily loaded with cuprous oxide. As a result of this loading there is a tendency for settling to occur especially if the paint has been on the shelf for several months. It is necessary to thoroughly mix the paint before using. If possible shake the can of paint on a mechanical paint shaker. Before using check the sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, pour off half

of the liquid from the top of the can into another can and then properly mix in any settled pigment, then remix the two parts together thoroughly.

**Application Temperatures:** 5C i above.

**Application Method:** Brush, roller or spray.

**Thinner:** Thinning this product is not normally required. If thinning is necessary, use Pettit 185 ACP Thinner only. Do not thin more than 10% by volume (12 ounces per gallon), or inadequate paint film thickness may result in premature erosion of the finish.

**Coverage:** This product covers approximately 500 square feet per gallon.

**Number of Coats:** For best antifouling protection at least two full coats of this product are recommended for the first years protection. It is a good idea for the first coat to be painted in a different color from the top coats. As the topcoat wears away, the base color will start to show through, signaling that it will soon be time to haul and repaint.

**Dry Times:** To recoat To launch

90°F	3 hours	8 hours
70°F	6 hours	16 hours
50°F	12 hours	24 hours

The above dry times are minimums. This product may be recoated and launched after minimum times shown. There is no maximum dry time before launching.

**VOC:** Less than 330 g/l unthinned.

**Maintenance Of Antifouling Paint:** No antifouling paint can be effective under all conditions of exposure. Man-made pollution and natural occurrences can adversely affect antifouling paint performance. Extreme hot and cold water temperatures, silt, dirt, oil, brackish water and even electrolysis can ruin an antifouling paint. Therefore, we strongly suggest that the bottom of the boat be checked regularly to make sure it is clean and that no growth is occurring. Lightly scrub the bottom with a soft brush to remove anything from the antifouling paint surface. Scrubbing is particularly important with boats that are idle for extended periods of time. The self-cleaning nature of the coating is most effective when the boat is used periodically.

**PAINT SYSTEMS**

The paint systems outlined below contain references to other Pettit products. Please read and understand the label and/or Technical Bulletin for these products as well to ensure that they are used properly. For further guidance, please contact your local Pettit salesman or Pettit Customer Service Department at (800) 221-4466 between the hours of 8:30 a.m. and 4:30 p.m. EST.

**Previously Painted Surfaces:** If the previous coating is in good condition thoroughly sand with 80 grit production paper and wipe clean with a rag dampened with Pettit 185 ACP Thinner to remove sanding residue. Apply two coats of this product observing the proper dry times. If the previous coating is soft or in poor condition, remove to the bare surface by sanding or using paint and varnish remover. Proceed with the appropriate bare system as described below. Old tin copolymer paints must be removed before applying this product.

**Bare Fiberglass:** All bare fiberglass, regardless of age, must be thoroughly cleaned using Pettit 95 Fiberglass Dewaxer and clean lint-free rags. Several cleanings may be necessary to ensure complete removal of contaminants. Change rags frequently during the dewaxing/cleaning process to ensure complete removal of contaminants rather than merely smearing them on the surface. New boats must be scrubbed with a detergent and water solution and rinsed with fresh water prior to dewaxing. After the surface has been dewaxed, sand it thoroughly with 80 grit production paper and rewash the sanded surfaces with Pettit 95 Dewaxer or 120 Brushing Thinner to remove sanding residue. Apply two coats of this product observing the proper dry times. If sanding is prohibited, as with certain vinyl-ester gelcoats, or is otherwise impractical, make sure the surface has been completely and thoroughly dewaxed and cleaned with Pettit 95 Fiberglass Dewaxer. Then apply one thin continuous coat of Pettit 6999 Sandless Primer. Topcoat with two coats of this product carefully following the topcoating instructions on the Sandless Primer label.

**Bare Wood:** Sand the entire surface with 80 grit production paper and wipe clean with a rag dampened with Pettit 185 ACP Thinner. Apply a coat of Pettit 6627 Tie Coat Primer thinned 10% to penetrate and seal the wood. Fill any open seams with Pettit Seam Compound and allow to dry overnight. Apply two full coats of this product observing the proper dry times.

**Bare Steel:** Sandblast to clean, bright metal and remove blasting residue with clean, dry compressed air or a clean brush. Immediately apply two coats of Pettit 4700/4701 Pettit Protect Epoxy Primer. Read and follow carefully the instructions on the 4700/4701 Pettit Protect Epoxy Primer label. If the surface to be painted will be prepared using hand tools such as wire wheels or sanders, clean off residue and immediately apply one coat of Pettit 6980 Rustlok Steel Primer. Let dry 1-2 hours and follow with two coats of Pettit 4700/4701 Pettit Protect Epoxy Primer. Read and follow carefully the instructions for application and topcoating on both primer labels.

**Underwater Metal Parts:** Use Pettit 6456 Underwater Metal Kit for surface preparation instructions and priming underwater metal running gear.

**Warranty:** We guarantee this material to comply with our published specifications. Since the use of this material is beyond our control, we disclaim responsibility for its handling, use, storage, the results obtained or any injury or damage of any nature resulting therein.

**DO NOT USE THIS PRODUCT ON ALUMINUM HULLS OR OUTDRIVES**

**MEDICAL EMERGENCIES: 1-800-548-0489**

**PRODUCT INFORMATION: 1-800-221-4466**

Made in U.S.A. P3288 1298 GA-3703

ACCEPTED  
with COMMENTS

in EPA Letter Dated:

JUN 02 2005

Under the Federal Insecticide,  
Fungicide, and Rodenticide Act as  
amended, for the pesticide  
registered under EPA Reg. No.  
60061-117

4/4