

67071-10

3/12/2014

1/10



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
WASHINGTON, D.C. 20460

OFFICE OF CHEMICAL SAFETY  
AND POLLUTION PREVENTION

Cheryl Woodward, Regulatory Specialist  
Thor Specialties Inc.  
50 Waterview Drive  
Shelton, CT 06484

MAR 12 2014

Subject: Acticide RS-F  
EPA Reg. No. 67071-10  
Amendment Application Date: September 6, 2013  
EPA Received Date: September 17, 2013

The labeling referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA), Section 3(c)(5), is acceptable. The agency has no objection to the clarification of the use categories and the addition of an establishment in Mexico. A stamped copy of the label is enclosed for your records.

If you have any questions concerning this letter, please contact Amaris Johnson at (703) 305-9542.

Sincerely,

A handwritten signature in black ink, which appears to read "M. Swindell", is written over the typed name.

Marshall Swindell  
Product Manager (33)  
Regulatory Management Branch I  
Antimicrobials Division (7510P)

Precautionary Statements:  
Hazards to Humans and Domestic Animals

DANGER

CORROSIVE. CAUSES IRREVERSIBLE EYE DAMAGE. HARMFUL IF ABSORBED THROUGH SKIN. CAUSES SKIN IRRITATION. DO NOT GET IN EYES, ON SKIN OR ON CLOTHING. AVOID CONTACT WITH SKIN. PROLONGED OR FREQUENTLY REPEATED SKIN CONTACT MAY CAUSE ALLERGIC REACTION IN SOME INDIVIDUALS. REMOVE CONTAMINATED CLOTHING AND WASH BEFORE REUSE.

Personal Protective Equipment (PPE):

- Mixers, loaders, and others exposed to product must wear:
  - Long-sleeve shirt and long pants
  - socks and Shoes
  - goggles or face shield
  - chemical-resistant gloves (such as rubber or made out of any waterproof material)
- Follow manufacturer's instructions for cleaning / maintaining PPE. If there are no such instructions for washables, use detergent and hot water. Keep and wash PPE separately from other laundry.
- User Safety Recommendations: users should wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet. Users should remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing. Users should remove PPE immediately after handling this product. Wash the outside of gloves before removing. As soon as possible, wash thoroughly. Discard clothing or other absorbent materials that have been drenched or heavily contaminated with this product's concentrate.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to aquatic plants, fish and aquatic invertebrates. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or public waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the sewerage treatment plant authority. For guidance contact your Water Board or Regional Office of the EPA.

UN 3265, CORROSIVE LIQUID, ACIDIC, ORGANIC, N.O.S. [mixture containing 5-Chloro-2-methyl-4-isothiazolin-3-one and 2-Methyl-4-isothiazolin-3-one (3:1)], 8, PG-II

EPA Reg. No. 67071-10 EPA Est. No. 67071-DEU-001

Manufactured By/For: Thor GmbH

D-67346 Speyer, Germany

Tel. (062232) 6360

Thor Specialties, Inc.

50 Waterview Drive, Shelton, CT 06484, U.S.A.

Tel. (203) 516-6980

EPA Est. No. 67071-MEX-001

Thor Químicos de México SA de CV.

Autopista Mex-Ciudad Km 192; Pedro Escobar, Querétaro, México. Tel. (448) 2752203

Manufactured For: Thor GmbH

U.S. Office: Thor Specialties, Inc.

50 Waterview Drive, Shelton, CT 06484 USA

Tel. (203) 516-6980

Batch:

Mfg Date:

ACTICIDE® RS-F

ACTIVE INGREDIENTS:

5-Chloro-2-methyl-4-isothiazolin-3-one ..... 1.11%

2-Methyl-4-isothiazolin-3-one ..... 0.37%

OTHER INGREDIENTS: ..... 98.52%

TOTAL: ..... 100.00%

ACTICIDE® RS-F microbicide weighs 8.6 lb. per gallon.

KEEP OUT OF REACH OF CHILDREN

DANGER - PELIGRO

See Side panel for additional precautionary statements

FIRST AID

**If in Eyes:**  
➢ Hold eye open and rinse slowly and gently with water for 15-20 minutes.  
➢ Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.  
➢ Call a poison control center or doctor for treatment advice.

**If Swallowed:**  
➢ Call a poison control center or doctor immediately for treatment advice.  
➢ Have person sip a glass of water if able to swallow.  
➢ Do not induce vomiting unless told to do so by the poison control center or doctor.

**If on Skin:**  
➢ Take off contaminated clothing.  
➢ Rinse skin immediately with plenty of water for 15-20 minutes.  
➢ Call a poison control center or doctor for treatment.

**If Inhaled:**  
➢ Move person to fresh air.  
➢ If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible.  
➢ Call a poison control center or doctor for further treatment advice.

Note to physician: Probable mucosal damage may contraindicate the use of gastric lavage.

**HOT LINE NUMBER:** In case of emergency, for additional information call toll free 1-800-424-9300. Have the product container or label with you when calling a poison control center or doctor, or going for treatment.

**For Transportation / Spill Emergency:**

Call Chemtrec at 1-800-424-9300

ACCEPTED

MAR 12 2014

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 67071-10

THOR

PHYSICAL AND CHEMICAL HAZARD

This product is corrosive to mild steel.

STORAGE AND DISPOSAL

This product (pH 1.95) is corrosive to mild steel.

**PESTICIDE STORAGE:** Do not store or transport in unlined metal containers. Do not contaminate water, food or feed by storage, disposal or cleaning of equipment.  
**PESTICIDE DISPOSAL:** Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide or rinsate is a violation of Federal Law. If waste cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL

Non-refillable container. Do not reuse or refill this container. Triple rinse container promptly after emptying. Triple rinse as follows: [For containers < 5 gallons in size] - Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¾ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times. [For containers > 5 gallons in size] - Empty the remaining contents into application equipment or a mix tank. Fill the container ¾ full with water. Replace and tighten closures. Tip container on its side and roll it back and forth, ensuring at least one complete revolution, for 30 seconds. Stand the container on its end and tip it back and forth several times. Turn the container over onto its other end and tip it back and forth several times. Empty the rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Repeat this procedure two more times. Then offer for recycling if available or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

**GENERAL:** CONSULT FEDERAL, STATE OR LOCAL DISPOSAL AUTHORITIES FOR APPROVED ALTERNATIVE PROCEDURES.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Industrial microbicide for use in metal working fluids, metal cleaning fluids, hydraulic fluids, adhesives, tackifiers, dispersed pigments, paints, building materials, polymer lattices, recirculating water cooling towers, air washer systems, oil field injection waters, paper slime control, recirculating closed loop water cooling systems, brewery pasteurizer and can warmer systems, ultra filtration units, such as reverse osmosis systems, aqueous compositions, and in liquid soaps, cleaners, detergents, carpet shampoos for industrial and household uses and in polishes and waxes which are classified as indoor non-food and non-food applications. READ AND FOLLOW THE DIRECTIONS FOR USE ON THE ACCOMPANYING INFORMATION SHEET.

\* Not approved for these uses in the State of California

CONDITIONS OF SALE AND WARRANTY

Thor GmbH warrants that the product conforms to its chemical description and is reasonably fit for the purpose stated on the label only when used in accordance with label directions under normal conditions of use. THOR GMBH MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES EITHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE. Handling, storage and use of the product by Buyer or User are beyond the control of Thor GmbH and Seller. Risks such as ineffectiveness or other unintended consequences resulting from, but not limited to, failure to follow label directions will be assumed by the Buyer or User. IN NO CASE WILL THOR GMBH OR SELLER BE HELD LIABLE FOR CONSEQUENTIAL, SPECIAL OR INDIRECT DAMAGES RESULTING FROM THE HANDLING, STORAGE OR USE OF THIS PRODUCT.

Net Contents (pounds):

3/10

# ACTICIDE® RS-F INFORMATION SHEET



**THIS ACTICIDE® RS-F INFORMATION SHEET MUST ACCOMPANY EACH SHIPMENT OF ACTICIDE® RS-F**

## DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Typical applications and suggested range of use concentrations based on total weight of product are as follows:

### PRESERVATIVE FOR METAL WORKING FLUIDS

ACTICIDE® RS-F microbicide is recommended for the control of bacteria and fungi in aqueous metal working fluid solutions and emulsions.

The preservative should be dispensed into the use dilution of the metal working fluid using a metering pump and uniformly dispersed throughout the system.

For a noticeably fouled system use an initial dose of 64 to 160 fluid ounces (4.5 to 10 lb) per 1000 gallons of emulsion followed by subsequent maintenance dosage. A higher dosage rate and/or increased frequency of treatment may be required depending upon the nature and severity of contamination, level of control required, filtration effectiveness, system design, etc.

**32 FL OZ (2 LB) per 1000 GAL of emulsion every 4 weeks**

### PRESERVATIVE FOR ADHESIVES AND TACKIFIERS

ACTICIDE® RS-F microbicide is recommended as an in-container preservative for the control of bacteria and fungi in water soluble and water dispersed adhesives such as animal glues, vegetable glues, natural rubber latices, polyvinyl acetate, styrene-butadiene and acrylic latices.

ACTICIDE® RS-F microbicide is recommended as a preservative for tackifiers derived from rosin and hydrocarbon resins.

For storage during extremely high temperatures and humidity, use up to 0.3% (3.0 lb per 1000 lbs formulation).

**0.05 – 0.165%**


**0.5 – 1.65 LB per 1000 LBS formulation**

### WATER-BASED HYDRAULIC FLUID PRESERVATION

ACTICIDE® RS-F microbicide is recommended as a preservative for use in the manufacture and use of high water-based hydraulic fluids and invert emulsion hydraulic fluids typically prepared by emulsifying 40% by volume water in 60% by volume of mineral oil using an oil soluble emulsifying agent.

For a noticeably fouled system use an initial dose of 150 to 250 fluid ounces (12 to 20 lb) per 1000 gallons fluid to be followed by subsequent maintenance dosage. A higher dosage range and/or increased frequency of treatment may be required depending upon rate of dilution of the preservative with make-up fluid, the nature and severity of contamination, level of control required, filtration effectiveness, system design, etc.

**120 to 150 FL OZ (10 to 12 LB) per 1000 GAL of fluids every 8 weeks**

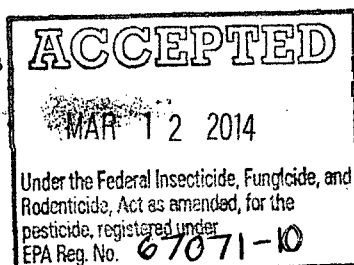

4/10

# ACTICIDE® RS-F

## INFORMATION SHEET



**THIS ACTICIDE® RS-F INFORMATION SHEET MUST ACCOMPANY EACH SHIPMENT OF ACTICIDE® RS-F**

### DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

#### DISPERSED PIGMENT PRESERVATION

ACTICIDE® RS-F microbicide is recommended for the control of bacteria and fungi in the manufacture and storage of dispersed pigments such as kaolin clay, montmorillonite clay, titanium dioxide, calcium carbonate, calcium sulfate, barium sulfate, magnesium silicate, dispersed colorants and kieselguhr used in paint and paper production.

**0.06 – 0.225%**

0.6 – 2.25 LB per 1000 LB fluid  
250 – 1020 grams per 453 KG of fluid

#### METAL CLEANING FLUID PRESERVATION

ACTICIDE® RS-F microbicide is recommended as a preservative for use in the manufacture and use of alkaline, acid and emulsion based metal cleaning fluids typically used in electroplating, phosphatizing, galvanizing and general metal cleaning operations.

The preservative should be dispensed into the use-dilution metal cleaning fluid using a metering pump and uniformly dispersed throughout the system.

For addition to a metal cleaning concentrate, add ACTICIDE® RS-F microbicide at a level to ensure that the final use-dilution fluid will contain 560 to 2250 ppm product. A higher dosage rate and/or increased frequency of treatment may be required depending upon the nature and severity of contamination, level of control required, filtration effectiveness, system design, etc.

**For direct addition to a fouled system:**

**72 to 290 FL OZ (6 to 23 LB)  
per 1000 GAL of use-dilution  
metal cleaning fluid every 3  
to 4 weeks**  
(560 to 2250 ppm ACTICIDE® RS-F)

#### PRESERVATIVE FOR BUILDING MATERIALS

ACTICIDE® RS-F microbicide is recommended as an in-container preservative for the control of bacteria and fungi in building materials such as mastics, caulks, joint cements, spackling, grouting, and concrete admixtures.

**0.05 – 0.165%**

0.5 – 1.65 LB per 1000 LB of fluid

#### PRESERVATIVE FOR LATICES

ACTICIDE® RS-F microbicide is recommended for the control of bacteria and fungi in the manufacture and storage of synthetic and natural polymer latices including: acrylics, styrene/butadiene, carboxylated styrene/butadiene, ethylene/vinyl acetate and biopolymers intended for industrial use such as xanthan gum, gum arabic, guar gum, protein derived polymers, starches and casein derived polymers.

**Note:** To insure uniform mixing, add ACTICIDE® RS-F microbicide to latex or solutions slowly with agitation. The actual concentrations required will depend upon such factors as the specific substance to be treated, frequency of repeated microbial contamination expected and level of protection required.

**0.05 – 0.33%**

0.5 – 3.3 LB per 1000 LB emulsion  
227g – 1.5 KG per 454 KG of emulsion

5/0

# ACTICIDE® RS-F INFORMATION SHEET



**THIS ACTICIDE® RS-F INFORMATION SHEET MUST ACCOMPANY EACH SHIPMENT  
OF ACTICIDE® RS-F**

## **DIRECTIONS FOR USE**

**It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.**

### **PRESERVATIVE FOR PAINTS AND COATINGS**

ACTICIDE® RS-F microbicide is recommended as an in-container preservative for the control of bacteria and fungi in water based coatings such as paper, wood coatings and paints used for architectural, product finishes and special purpose coatings.

A higher dosage rate may be required for storage during extremely high temperatures and humidity.

#### **0.05 – 0.165%**

0.5 – 1.65 LB per 1000 LB fluid  
227 – 750 grams per 454 KG  
fluid

#### **Up to 0.3%**

3.0 LB per 1000 LB fluid

\*Specifically as a wood coating, ACTICIDE® RS-F is recommended for the protection of wood and wood products such as landscape timbers, fences, posts, pilings, cross ties, decks and similar exterior structures, from mold and mildew. As a pressure treatment for mold and mildew control for southern yellow pine, hemlock, ponderosa pine and other soft woods. Thoroughly wet and allow to dry. A single application will afford protection for 12 weeks.

Under extreme mildew conditions. Thoroughly wet and allow to dry. A single application will afford protection for 12 weeks.

*\*Not approved for this use in the State of California*

1.9 – 6.6 LB per 1000 GAL  
preservative  
(29 – 101 FL OZ per 1000  
GAL)  
267 – 840 ppm of  
ACTICIDE® RS-F

13.25 – 26.5 LB per 1000  
GAL wood treatment  
solution  
(1.6 – 3.2 GAL per 1000  
GAL)

1600 – 3200 ppm of  
ACTICIDE® RS-F

### **\*Special purpose coating uses**

Use as a preservative for:

- Electrodeposition paints or solutions
- Photoplatting solutions or coatings
- Fount (or fountain) solutions used in the printing process as a maintenance fluid/coating and as a special coating for printing plates
- Spin finish coatings for fibers.

*\*Not approved for these uses in the State of California*

The application/addition directions for these special purpose coating uses are:

6/10

# ACTICIDE® RS-F INFORMATION SHEET



**THIS ACTICIDE® RS-F INFORMATION SHEET MUST ACCOMPANY EACH SHIPMENT OF ACTICIDE® RS-F**

## DIRECTIONS FOR USE

**It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.**

### \*PHOTOPLATE PROCESSING, FOUNTAIN SOLUTIONS, AND INK/INK COMPONENTS

ACTICIDE® RS-F microbiocide is recommended for the control of bacteria and fungi in photoplate processing such as stabilizer solutions and in fountain solutions. ACTICIDE® RS-F is recommended for water-based printing inks such as flexographic, gravure, screen and ink jet types. ACTICIDE® RS-F is recommended for the control of bacteria and fungi in printing ink components such as resins, plasticizers, water soluble dyes, pigments, gelling agents, waxes, surfactants, and thickeners.

ACTICIDE® RS-F should be added to achieve the recommended dosage range for ink, ink components, fountain solutions and photoplate processing chemical of 0.1 to 1.0% on a total weight basis. The optimum level range for acidic fountain solutions is 0.2% to 0.5%; the optimum level range for neutral fountain solutions is 0.5% to 0.8%. A level adjustment may be necessary to accommodate the slight change in solution formulations.

*\*Not approved for this use in the State of California*

### \*PRESERVATIVE IN SPIN FINISH COATINGS FOR FIBERS

ACTICIDE® RS-F microbiocide is recommended for the control of bacteria and algae in spin finish coating solutions used to coat fibers. ACTICIDE® RS-F should be dispensed into the spin finish coating system at a point to ensure uniform mixing. It should be added to achieve the recommended dosage range of 0.05% to 0.5% on a total weight basis, with the optimum level used if fouling becomes noticeable.

*\*Not approved for this use in the State of California*

### \*ELECTRODEPOSITION

ACTICIDE® RS-F microbiocide is recommended as a tankside additive for the control of bacteria, fungi, and algae in re-circulating electrodeposition systems and associated rinse systems. Alternately, ACTICIDE® RS-F microbiocide may be added through the components of the electrodeposition paint prior to their addition to the electrodeposition system.

*\*Not approved for this use in the State of California*

### \*Tankside Addition to Electrodeposition Systems:

ACTICIDE® RS-F microbiocide should be dispensed into the recirculating rinse system, ultrafilter permeate, or final distilled rinse system at a point to insure uniform mixing.

When the system is noticeably fouled, add 650 to 2245 ppm ACTICIDE® RS-F microbiocide (5.4 to 22.9 gallons per 10,000 gallons of fluid in the system). Repeat until control is achieved.

When microbial control is evident, add 321 to 962 ppm ACTICIDE® RS-F microbiocide (3.2 to 10.1 gallons per 10,000 gallons of fluid in the system) weekly or as needed to maintain the system.

A change of frequency of treatment may be required depending on the rate of dilution of the preservative with the makeup fluid, the nature and severity of contamination, level of control required, filtration effectiveness, system design, etc.

*\*Not approved for this use in the State of California*

7/10

# ACTICIDE® RS-F INFORMATION SHEET



**THIS ACTICIDE® RS-F INFORMATION SHEET MUST ACCOMPANY EACH SHIPMENT  
OF ACTICIDE® RS-F**

## **DIRECTIONS FOR USE**

**It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.**

### **\*TREATMENT OF ELECTRODEPOSITION PAINT COMPONENTS**

#### **Initial Dose of Paint Components:**

ACTICIDE® RS-F microbiocide should be added to the resin, pigment, or other component of the electrodeposition paint at a level to ensure that the final use-dilution fluid will contain 321 to 2245 ppm product.

*\*Not approved for this use in the State of California*

#### **\*Supplemental Tanked Dosing of Electrodeposition System:**

If additional microbial control is necessary, ACTICIDE® RS-F microbiocide may be added to the electrodeposition system tankside to supplement the microbiocide incorporated through paint components.

If the system becomes noticeably fouled, add 650 to 2245 ppm ACTICIDE® RS-F microbiocide (6.4 to 22.9 gallons per 10,000 gallons of fluid in the system). Repeat until control is achieved.

When microbial control is evident, the system can be maintained by addition of 321 to 962 ppm ACTICIDE® RS-F microbiocide (3.2 to 10.1 gallons per 10,000 gallons of fluid in the system) weekly or as needed.

*\*Not approved for this use in the State of California*

**NOTE:** Regardless of the manner of incorporation, the total level in the system should never exceed 2245 ppm ACTICIDE® RS-F or 22.9 gallons per 10,000 gallons of system fluid.

**NOTE:** To insure uniform mixing, add ACTICIDE® RS-F microbiocide to latex or solution slowly with agitation. The actual concentrations required will depend upon such factors as the specific substance to be treated, frequency of repeated microbial contamination expected and level of protection required.

### **INDUSTRIAL RECIRCULATING WATER COOLING TOWERS**

ACTICIDE® RS-F microbiocide is recommended for the control of bacteria, algae and fungi. It should be added to the tower basin or some other point to ensure uniform mixing.

For noticeably fouled systems use an initial dose of 1.25 to 7.5 lb ACTICIDE® RS-F per 1000 gallons of water. Repeat if necessary to achieve control.

**0.3 – 1.86 LB per 1000 GAL  
of water weekly or as  
needed for maintenance  
(35 to 220 ppm ACTICIDE®  
RS-F)**

### **AIR WASHER SYSTEMS**

For use only in industrial air washing systems that maintain effective mist eliminating components.

Add to the air washer sump or chill water sump to ensure uniform mixing, for the control of bacteria, fungi and algae. A repeat treatment may be needed depending on the severity of contamination.

**0.3 – 7.5 LB per 1000 GAL  
of water  
(35 to 880 ppm ACTICIDE®  
RS-F)**

8/10

# ACTICIDE® RS-F INFORMATION SHEET



**THIS ACTICIDE® RS-F INFORMATION SHEET MUST ACCOMPANY EACH SHIPMENT OF ACTICIDE® RS-F**

## DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

### OIL FIELD INJECTION WATERS

For control of slime-forming and sulfate reducing bacteria in oil and gas field water systems including enhanced recovery injection fluids and drilling fluids.

An initial dose of 57 to 115 lb ACTICIDE® RS-F per 1000 barrels of water (162 to 324 ppm ACTICIDE® RS-F) may be used until control is achieved. This product may be used for terrestrial and off-shore oil drilling muds and packer fluids.

**23 – 58 LB (2.8 to 6.9 GAL)  
per 1000 barrels  
of water weekly or as  
needed  
(66 to 165 ppm ACTICIDE®  
RS-F)**

### \*PAPER MILLS

For the control of bacterial and fungal slime in the production of paper. ACTICIDE® RS-F should be added to a point such as the Beater or Hydropulper to ensure uniform mixing.

*\*Not approved for this use in the State of California*

**0.45 – 1.5 LB per TON (dry  
basis) of pulp or paper, as  
a slug dose**

### INDUSTRIAL RECIRCULATING CLOSED LOOP WATER COOLING SYSTEMS

To maintain control of bacteria, fungi and algae, add to the reservoir, recirculating line or some other point in the system to ensure uniform mixing.

For noticeably fouled systems an initial treatment with 1.25 to 7.5 lb of ACTICIDE® RS-F per 1000 gallons of water may be needed depending on the severity of the fouling.

**0.3 – 1.86 LB per 1000 GAL  
of water in the system  
weekly**

### \*BREWERY PASTEURIZERS AND CAN WARMER SYSTEMS

To maintain control of bacteria, algae and fungi.

For noticeably fouled systems an initial treatment with 1.25 to 7.5 lb ACTICIDE® RS-F per 1000 gallons of water may be needed depending on the severity of the fouling.

*\*Not approved for this use in the State of California*

**0.3 – 1.86 LB per 1000 GAL  
of water in the system  
weekly or as needed**

### \*INDUSTRIAL PROCESS WASH WATER

ACTICIDE® RS-F microbiocide is recommended for the control of bacteria and fungi in the storage of process wash waters.

*\*Not approved for this use in the State of California*

**0.05 – 0.30%  
0.5 – 3.0 LB per 1000 LB  
wash water**



9/10

# ACTICIDE® RS-F INFORMATION SHEET



**THIS ACTICIDE® RS-F INFORMATION SHEET MUST ACCOMPANY EACH SHIPMENT  
OF ACTICIDE® RS-F**

## DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

### \*ULTRA FILTRATION UNITS, such as REVERSE OSMOSIS SYSTEMS

ACTICIDE® RS-F microbiocide is recommended for the control of bacteria and fungi in ultra filtration units, such as reverse osmosis systems.

**10 – 333 ppm ACTICIDE®  
RS-F**

Add into industrial ultra filtration or reverse osmosis systems by either continuous feed or periodic injection. Compatibility of ACTICIDE® RS-F microbiocide with reverse osmosis membranes should be confirmed with membrane manufacturers.

For the control of bacteria and fungi in carbon beds.

**10 – 333 ppm ACTICIDE®  
RS-F**

For periodic membrane cleaning.

**0.4 – 1.0 LB per 120 GAL of  
cleaning solution**

Badly fouled systems should be cleaned before treatment is begun.

*\*Not approved for this use in the State of California*

### \*PRESERVATIVE FOR AQUEOUS COMPOSITIONS

ACTICIDE® RS-F microbiocide is recommended as an in-container preservative for the control of bacteria and fungi in aqueous products such as aqueous emulsions and dispersions including:

**0.05 – 0.33%**

\*surfactants

**0.5 – 3.3 LB per 1000 LB  
aqueous product**

\*stabilized oil/water emulsions

**227 g – 1.5 KG per 454 KG of  
aqueous product**

\*surface preparation compounds

\*foam control products

\*nutrient solutions

\*pesticide formulations.

#### CONCENTRATES:

ACTICIDE® RS-F microbiocide may be added to those products formulated as concentrates which are in turn diluted for use at a level to ensure that the final use-dilution product will contain between 0.05 and 0.33% ACTICIDE® RS-F microbiocide.

*\*Not approved for this use in the State of California*

10/10

# ACTICIDE® RS-F INFORMATION SHEET



**THIS ACTICIDE® RS-F INFORMATION SHEET MUST ACCOMPANY EACH SHIPMENT  
OF ACTICIDE® RS-F**

## **DIRECTIONS FOR USE**

**It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.**

### **LIQUID HOUSEHOLD CONSUMER, INDUSTRIAL, JANITORIAL PRODUCTS**

For the control of bacteria and fungi in liquid soaps, liquid cleaners, liquid detergents, liquid laundry products, liquid dishwashing detergents, waxes, polishes, liquid fabric treatment/refreshers products, liquid air fresheners/deodorizers, car care products, and other similar cleaners.

ACTICIDE® RS-F may also be used for the control of bacteria and fungi in package utility products such as pre-moistened sponges and mops.

ACTICIDE® RS-F may also be used for the control of bacteria and fungi in solutions that are then put into/onto wet wipes for use in industrial, commercial, residential and household uses cited above.

Wet wipes containing a solution preserved with this product may not be used for personal care, as baby wipes, or for food contact.

#### **CONCENTRATES:**

ACTICIDE® RS-F microbiocide may be added to those products formulated as concentrates which are in turn diluted for use at a level to ensure that the final use-dilution product will contain between 0.04 and 0.15% ACTICIDE® RS-F microbiocide.

**0.04 – 0.15%**

0.4 – 1.5 LB per 1000 LB  
product

180 – 680 grams per 453.6 KG  
product

### **SEMI-SOLID/SOLID HOUSEHOLD CONSUMER, INDUSTRIAL, JANITORIAL PRODUCTS**

For the control of bacteria and fungi in semi-solid/solid soaps, semi-solid/solid cleaners, semi-solid/solid detergents, semi-solid/solid laundry products, semi-solid/solid dishwashing detergents, waxes, polishes, semi-solid/solid fabric treatment/refreshers products, semi-solid/solid air fresheners/deodorizers, car care products, and other similar cleaners.

ACTICIDE® RS-F may also be used for the control of bacteria and fungi in package utility products such as pre-moistened sponges and mops.

ACTICIDE® RS-F may also be used for the control of bacteria and fungi in solutions that are then put into/onto wet wipes for use in industrial, commercial, residential and household uses cited above.

Wet wipes containing a solution preserved with this product may not be used for personal care, as baby wipes, or for food contact.

#### **CONCENTRATES:**

ACTICIDE® RS-F microbiocide may be added to those products formulated as concentrates which are in turn diluted for use at a level to ensure that the final use-dilution product will contain between 0.04 and 0.15% ACTICIDE® RS-F microbiocide.

**0.04 – 0.15%**

0.4 – 1.5 LB per 1000 LB  
product

180 – 680 grams per 453.6 KG  
product