72372-4

06-09-2010



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY WASHINGTON D.C., 20460

OFFICE OF
PREVENTION, PESTICIDES AND
TOXIC SUBSTANCES

Keller and Heckman LLP c/o FMC Corporation. 1001 G Street, N.W. Washington, DC 20001

JUN 9 2010

Attention: Catherine Rice

Subject: B-Cap 27 Antimicrobial Agent EPA Reg. No. 72372-4 Amendment Letter dated March 9, 2010

The amendment referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. The Agency has no objection to the following:

• Updating label requirements for Storage Container Disposal (PR Notice 2007-4)

If you have any questions concerning this letter, please contact Demson Fuller at (703) 308-8062.

Sincerely,

Marshall Swindell

Product Manager (33) Regulatory Management Branch 1 Antimicrobials Division (7510C)

B-Cap[™] 27 Antimicrobial Agent

For Industrial Use Only -Not for human consumption or household use

EPA Registration No. 72372-4 EPA Est. No. 65402-TX -001 60156-IL -001


B-Cap[™] 27 Antimicrobial Agent is for biofouling and slime control in:

- Pulp and paper mill systems
- Recirculating and once through cooling water systems
- Pasteurizer cooling water systems
- Process Waters
- **Biocidal Control in Packaging and Storage** Vessels

Active Ingredients:	Hydrogen Peroxide	27%
Inert ingredients: Total		<u>73%</u> 100%

KEEP OUT OF REACH OF CHILDREN DANGER

FMC and B-Cap™ are trademarks of FMC Corporation

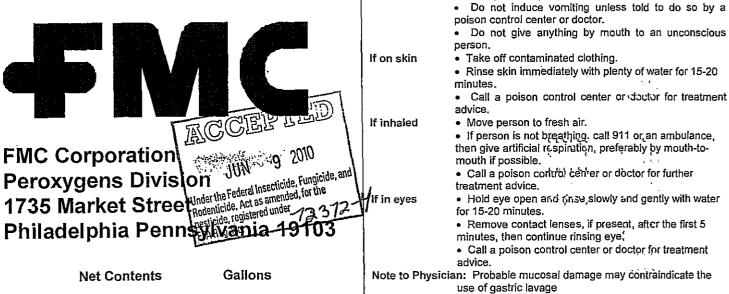

Precautionary Statements Hazards to Humans and Domestic Animals

DANGER

Corrosive. Causes irreversible eve damage and skin burns. May be fatal if inhaled. Harmful if swallowed or absorbed through the skin. Do not get in eyes or on skin or clothing. Do not breathe (dust, vapor or spray mist). Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet. Remove and wash contaminated clothing before reuse. Wear coveralls over long sleeved shirt and long pants, socks, chemical resistant footwear and chemical resistant gloves. Wear appropriate protective eyewear. Wear a respirator with an organic-vapor-removing cartridge with a prefilter approved for pesticides (MSHA/NIOSH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NIOSH approval number prefix TC-14G.

Physical or Chemical Hazards

Strong oxidizing agent. Mix only with water. B-Cap™ 27 Antimicrobial Agent is not combustible; however, at temperatures exceeding 156°F, decomposition occurs releasing oxygen. The oxygen released could initiate or promote combustion of other materials.

Environmental Hazards

This pesticide is toxic to birds, mammals, fish and aquatic invertebrates. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA. Any solution released from the system should be diluted with water and tested for residuals to ensure that there is less than 3 ppm peroxygen remaining.

First Aid

If swallowed

Have the product container or label with you when calling a poison control center or doctor, or going for treatment. · Call poison control center or doctor immediately for

• Have person sip a glass of water if able to swallow.

treatment advice.


then give artificial respiration, preferably by mouth-to-· Call a poison control center or doctor for further Hold eye open and finse, slowly and gently with water Remove contact lenses, if present, after the first 5 Call a poison control center or doctor for treatment. Page 1 of 3

Storage and Disposal Storage

NEVER RETURN B-CAP™ 27 ANTIMICROBIAL AGENT TO THE ORIGINAL CONTAINER AFTER IT HAS BEEN REMOVED. Avoid all contaminants, especially dirt, caustic, reducing agents, and metals. Contamination and impurities will reduce shelf life and can induce decomposition. In case of decomposition, isolate container, douse container with cool water and dilute B-Cap™ 27 Antimicrobial Agent with large volumes of water.

Avoid damage to containers. Keep container closed at all times when not in use. Keep container out of direct sunlight. To maintain preduct Procedure for Leak or Spin CCEPPILE

bisposal Pesticide Disposal



Pesticide Disposal

resulting Disposal interval has been spilled, an acception of disposal is to dilute with at least 20 volumes of water followed by discharge into suitable treatment system in accordance with all local, state, and Federal environmental laws, rules, regulations, standards, and other requirements. Because acceptable methods of disposal may vary by location, regulatory agencies should be contacted prior to disposal.

B-Cap™ 27 Antimicrobial Agent which is to be discarded should be disposed of as hazardous waste after contacting the appropriate local, state, or Federal agency to determine proper procedures.

Container Disposal

Containers greater than or equal to 5 gallons but less than or equal to 55 gallons. Nonrefillable container. Do not reuse or refill this container. Offer for recycling, if available. Triple rinse container (or equivalent) promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank. Fill the container 1/4 full with water. Replace and tighten closures. Tip container on its side and roll it back and forth, ensuring at least one complete revolution, for 30 seconds. Stand the container on its end and tip it back and forth several times. Turn the container over into its other end and tip it back and forth several times. Empty the rinsate into application equipment or a mix tank or store rinsate for later use for disposal Repeat this procedure two more times. Empty drums are not returnable to FMC unless special arrangements have been made. Dispose of drums in accordance with local, state, and Federal regulations.

Containers greater than 55 gallons. Refillable container. Return to FMC for reuse.

Directions for Use

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

B-Cap[™] 27 Antimicrobial Agent

A microbiocide for use in controlling slime and sulfate forming bacteria in process waters, air washing systems, recirculating and once through water cooling towers and systems such as holding ponds and lagoons, including pasteurizer cooling water systems and industrial closed recirculating process water systems and packaging and storage vessels.

Air Washers and Recirculating and Once-Through Cooling Water Systems, (cooling towers, evaporative condensers).

- Severely fouled systems should be cleaned prior to treatment.
- This product may be used in all types of cooling water systems 2. that have mist-eliminating components. B-Cap™ 27 Antimicrobial Agent should be added at a point where uniform mixing can be achieved, for example, in the basin area. Addition may be intermittent or continuous. Hydrogen peroxide should not be mixed with other chemicals or additives without first checking for

compatibility. Contaon with other chemicals could cause product decomposition.

- Intermittent (Slug Dose) For severely fouled systems add 4 to 215 fl oz of B-Cap™ 27 Antimicrobial Agent per 1000 gallons of water in the system, (10 to 500 ppm). Repeat until control is achieved. When control is evident, add 1 to 31 fl oz of B-Cap™ 27 Antimicrobial Agent per 1000 gallons of water in system (3 to 100 ppm) as needed to maintain control.
- Continuous Feed Initial Dose: If the system is noticeably fouled, use slug dose procedure for the initial treatment. Once control is achieved, continuous feed of 0.4 to 21.5 fl oz B-Cap™ 27 Antimicrobial Agent per 1000 gallons of water per day in the system (1 to 50 ppm). Dosage rates should be adjusted depending on the extent of biofouling and control achieved.

Pasteurizer Cooling Water Systems

B-Cap™ 27 Antimicrobial Agent may be used for control of slime, bacteria, fungi, and other microorganisms in brewery and other pasteurizer systems and warmers at the same application rates and in the same manner as described above. The solution should be added to the closed recirculating system at a point where uniform mixing can be achieved, e.g., basin, sump, or collection areas.

Biofouling Control in Pulp and Paper Mill Systems

For use in the manufacture of paper and paperboard intended for non-food contact only. Not for use in the manufacture of paper and paperboard intended for food contact. This product may be used to control bacterial, fungal and yeast growth in pulp, paper and papeboard mills.

- 1. Severely fouled systems should be cleaned prior to treatment with B-Cap™ 27 Antimicrobial Agent. Add B-Cap™ 27 Antimicrobial Agent directly to the system; don't mix with other chemicals or additives without first testing for compatibility. Contamination with other chemicals could result in product decomposition.
- Add B-Cap[™] 27 Antimicrobial Agent at a point in the system where it 2 can be mixed uniformly with the pulp, e.g., the beater, hydropulper, fan pump, broke pump, etc.
- 3. Apply 1 to 52 fl oz. of B-Cap™ 27 Antimicrobial Agent per ton of pulp (dry basis) or paper produced, (10 to 500 ppm). Addition may be continuous or intermittent depending on the type of system and severity of the biofouling.

Process Water

B-Cap™ 27 Antimicrobial Agent may be used to aid in minimizing slime formation in process waters intended for use in precleaning hard nonporous surfaces, e.g., metals, glass or plastics prior to being painted. plated, or coated; cleaning pipes, equipment or other process equipment.

- Add B-Cap™ 27 Antimicrobial Agent at a point in the system where it can be mixed uniformly. The quantity of product required will depend upon the severity of the fouling.
- 2. Apply 0.4 to 215 fl oz per 1000 gallons of water in the system, (1 to 500 ppm). Once control is achieved, reduce application rate accordingly.

Control of Slime, Bacteria, Fungi, and other Microorganisms in packaging and storage vessels such as railcars, trucks, ships, totes, IBC's tanks, etc. used to contain clays, calcium carbonate, titanium dioxide, barium sulfate, and other filler materials.

1. If treating the container or vessel in the field, place the vessel or container on an area with an impervious surface with

controlled runoff. Ensure that the antimicrobial treatment eclution will not be released to the environment.

2. Remove gross contamination with a cleaner or other suitable detergent and rinse with water.

3. Prepare a dilute solution of the product by adding 1 to 4 volumes of B-Cap™ 27 Antimicrobial Agent to 11 volumes of potable

water. This will provide solutions containing 3% to 10% hydrogen

peroxide. Apply the diluted solution, at ambient or elevated temperatures to the surface as a coarse spray, whe/mop or flood

to reduce bacterial and fungal contamination.

4. Allow antimicrobial agent to contact the surface for a period of time sufficient to ensure adequate cleaning. Depending on microbial load, contact times can range from 5 to 30 minutes or longler., 5. Drain dry. Do not rinse.

In all applications, always prepare a new solution, daily to ensure effectiveness. Do not reuse solutions. Dispose of any unused solution.

EMERGENCY TELEPHONE NUMBERS (24 HOURS) MEDICAL: COLLECT 303-595-9048 TRANSPORTATION: 800-424-9300 OTHER: 281-474-8750

÷

ESL 030810

ACC	泥	PI	ED
JUN	9	2010	
Under the Fede Rodenticide, A pesticide, regi EPA Reg. No.	เม กอ น	11111111111111111	Fungicide, and for the

Page 3 of 3

••••

.

4