

72616-1

11/29/2004

1/4

Revised 10/04
FRONT PANEL:


TARATEK™ IP

For the control of Sapstain and Mold on Fresh Wood

INGREDIENT STATEMENT

Active Ingredients:

Propiconazole.....	5.00%
3-Iodo-2-propynyl butylcarbamate.....	5.00%
Alkyl (50%C ₁₄ , 40%C ₁₂ , 10%C ₁₆) dimethyl benzyl ammonium chloride.....	50.00%
Inert Ingredients:.....	40.00%
Total.....	100.00%

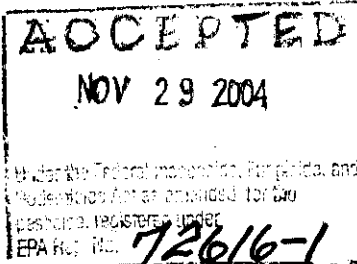

KEEP OUT OF REACH OF CHILDREN

DANGER

See side panel for other precautionary statements.

FIRST AID

- | | |
|---------------|--|
| IF IN EYES: | <ul style="list-style-type: none"> • Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice. |
| IF ON SKIN: | <ul style="list-style-type: none"> • Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15-20 minutes. • Call a poison control center or doctor for treatment advice. |
| IF INHALED: | <ul style="list-style-type: none"> • Move person to fresh air. • If person is not breathing, call 911 or ambulance, then give artificial respiration, preferably mouth-to-mouth. • Call poison control center or doctor for further treatment advice. |
| IF SWALLOWED: | <ul style="list-style-type: none"> • Call a poison control center or doctor immediately for treatment advice. • Have person sip a glass of water if able to do so. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give anything by mouth to an unconscious person. |

HOT LINE NUMBER

Have the product container with you when calling a poison control center or doctor, or going for treatment. You may also contact the National Pesticide Telecommunications Network at 1-800-858-7378 for emergency medical treatment information.

NOTE TO PHYSICIAN

Probable mucosal damage may contraindicate the use of gastric lavage.

EPA Reg. No. 72616-1

EPA Est. No. 62190-GA-001

Manufactured by: Taranaki NuChem Ltd.
New Plymouth, New Zealand

™Registered Trademark of Tapuae Partnership, NZ

NET CONTENTS: 5 Gallons
55 Gallons
275 Gallons

LEFT SIDE PANEL:

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

DANGER. Corrosive. Causes irreversible eye damage and skin burns. May be fatal if inhaled or absorbed through skin. Harmful if swallowed. Do not get in eyes, on skin, or on clothing. Wear protective eyewear (goggles, face shield, or safety glasses), protective clothing and gloves. Do not breathe vapor or spray mist. Wash thoroughly with soap and water after handling and before eating, drinking or using tobacco. Remove contaminated clothing and wash clothing before reuse.

PERSONAL PROTECTIVE EQUIPMENT (PPE)

Applicators and other handlers must wear:

- Coveralls over long-sleeved shirt and long pants
- Chemical resistant footwear and socks
- Chemical resistant gloves that are waterproof
- Protective eyewear
- Chemical resistant apron when cleaning equipment, mixing or loading
- Dust/mist filtering respirator (MSHA/NIOSH approval number prefix TC-21C)

Follow manufacturer's instructions for cleaning/maintaining PPE. If no such instructions for washables, use detergent and hot water. Keep and wash PPE separately from other laundry.

USER SAFETY RECOMMENDATIONS

Users should:

Wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet. Remove clothing immediately if pesticide gets inside, then wash thoroughly and put on clean clothing. Remove PPE immediately after handling this product. Wash the outside of gloves before removing. As soon as possible, wash thoroughly and change into clean clothing.

ENVIRONMENTAL HAZARDS

Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage, disposal or cleaning of equipment.

Storage. Store in a cool, well-ventilated storage area. Temperatures in excess of 104° Fahrenheit will cause decomposition of IPBC. Store in original container only in a locked place out of reach of children. Protect from freezing.

Pesticide Disposal. Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

Container Disposal. Do not reuse empty container. Dispose of container in a sanitary landfill or by incineration, or if allowed by state and local authorities, by burning. If burned, stay out of smoke.

Side Panel (continued)**Directions for Use**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

For Industrial or Commercial Use Only

APPLICATION DIRECTIONS:

Taratek IP may be applied to wood and wood products by immersion or spray methods according to the dilutions provided below. Dilution levels may vary widely and will depend on application methods, wood species, seasonal changes in exposure conditions, length of protection desired, and wood storage and transport conditions.

For spray applications: Mix one gallon of Taratek IP to 15-50 gallons of water.

For immersion applications: Mix one gallon of Taratek IP to 50-300 gallons of water.

For best results, apply Taratek IP to recently felled and fresh sawn or peeled wood ensuring total coverage. Allow treated wood to drain in a contained area before storage, and ensure that freshly treated wood is not allowed to remain unprotected in heavy rains.

WARRANTY

The manufacturers and vendors of Taratek IP* warrant the formulation to contain the specified active ingredients within the accepted limits when packed but make no warranty of any kind on the use of this material and accept no responsibility for results, whether the material has been used in accordance with directions or not.