

NPDES PERMIT NO. PR0020834

**AUTHORIZATION TO DISCHARGE UNDER THE  
NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM**

In compliance with the provisions of the Clean Water Act, as amended, 33 U.S.C. • 1251 et. seq. (the "Act"),

Puerto Rico Aqueduct and Sewer Authority  
P.O. Box 7066  
Barrio Obrero Station  
San Juan, Puerto Rico 00916

hereinafter referred to as "the permittee" is authorized to discharge from a facility named **San Lorenzo Wastewater Treatment Plant** located at:

State Road # 183, Km 9.5  
San Lorenzo, Puerto Rico 00754

to receiving waters named:

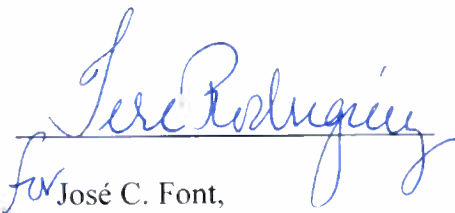
**Río Grande de Loíza**

in accordance with effluent limitations, monitoring requirements and other conditions set forth in Parts I and II hereof. All references to Title 40 of the Code of Federal Regulations are to regulations that are in effect on the effective date of this permit, including all amendments thereto published in the Federal Register. Unless otherwise specified herein, all terms are defined as provided in the applicable regulations under Title 40 of the Code of Federal Regulations.

This permit shall become effective on **April 1, 2013**, which is the Effective Date of the Permit (EDP).

This permit and the authorization to discharge shall expire at midnight of **March 31, 2018**.

Signed this 20<sup>th</sup> day of December, 2012.

  
For José C. Font,  
Acting Director  
Caribbean Environmental  
Protection Division

**TABLE I**  
**REQUIRED EFFLUENT LIMITATIONS**

EFFLUENT CHARACTERISTICS	DISCHARGE LOAD ALLOCATIONS		DISCHARGE CONCENTRATIONS LIMITATIONS		MINIMUM PERCENT REMOVAL LIMITATION
	Average Monthly	Average Weekly	Average Monthly	Average Weekly	Average Monthly
	(kg/day)	(kg/day)	(mg/l)	(mg/l)	
5-Day-20°C Biochemical Oxygen Demand <sup>1</sup>	227.3	341	30.0	45.0	85%
Suspended <sup>1</sup> Solids	227.3	341	30.0	45.0	85%

Flow shall be reported as a monthly average and daily maximum.  
Measurement frequency shall be continuous

<sup>1</sup> Measurement frequency shall be Weekly using composite sampling.

**TABLE A-1 EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS**

During the period beginning on the EDP and lasting through the expiration date of the permit, the permittee is authorized to discharge from outfall serial number 001 (treated wastewater). Such discharge shall be limited and monitored by the permittee as specified below:

Receiving Water Classification: SD

<u>Effluent Characteristics</u>	<u>Gross Discharge Limitations</u>		<u>Monitoring Requirements</u>	
	Monthly Avg.	Daily Max	Measurements Frequency	Sample Type
2,4,6-Trichlorophenol (µg/L) <sup>2,3</sup>		----	φ	Grab
2,4-Dichlorophenol (µg/L) <sup>2,3</sup>		----	φ	Grab
2,4-Dimethylphenol (µg/L) <sup>2,3</sup>		----	φ	Grab
2,4-Dinitrophenol (µg/L) <sup>2,3</sup>		----	φ	Grab
2-Chlorophenol (µg/L) <sup>2,3</sup>		----	φ	Grab
2-Methyl-4,6-Dinitrophenol (µg/L) <sup>2,3</sup>		----	φ	Grab
BOD <sub>5</sub> (mg/L) α <sup>1,2,3,4,6</sup>		See Table I, (page 2)	Weekly	Composite
Cadmium (Cd) (µg/L) α <sup>2,3,4,6</sup>		0.17	Monthly	Grab
Chromium III (Cr <sup>+3</sup> ) (µg/L) <sup>2,3</sup>		----	λ	Grab
Chromium VI (Cr <sup>+6</sup> ) (µg/L) <sup>2,3</sup>		----	λ	Grab
Color (Pt-Co Units) <sup>2,3,4,6</sup>		15	Monthly	Grab

<u>Effluent Characteristics</u>	<u>Gross Discharge Limitations</u>		<u>Monitoring Requirements</u>	
	Monthly Avg.	Daily Max	Measurements Frequency	Sample Type
Copper (Cu) ( $\mu\text{g/L}$ ) <sup>2,3</sup>		5	Monthly	Grab
Cyanide, Free (CN)( $\mu\text{g/L}$ ) $\alpha$ $\xi$ <sup>2,3,4,6</sup>		20	Monthly	Grab
Dissolved Oxygen (mg/L) $\alpha$ <sup>1,2,3,4,6</sup>	Shall contain not less than 4.0 mg/L.		Daily	Grab
Fecal Coliforms (colonies/100 mL) <sup>1,2,3</sup>	The Coliform geometric mean of a series of representative samples (at least five samples) of the waters taken sequentially shall not exceed 200 colonies/100 mL. Not more than 20% of the samples shall exceed 400 colonies/100 mL.		$\phi$	Grab
Flow m <sup>3</sup> /day (MGD) <sub>1,3,5</sub>		7,570.82 (2.0)	Continuous Recording or Estimated	
Nitrate plus Nitrite (as N) ( $\mu\text{g/L}$ ) $\alpha$ <sup>2,3,4,6</sup>		16,500	Monthly	Grab
Oil and Grease (mg/L) <sub>2,3</sub>	The waters of Puerto Rico shall be substantially free from floating non-petroleum oils and greases as well as petroleum derived oils and greases.		Monthly	Grab
Pentachlorophenol ( $\mu\text{g/L}$ ) <sup>2,3</sup>		---	$\phi$	Grab
pH (SU) <sup>2,3</sup>	Shall always lie between 6.0 – 9.0.		Daily	Grab
Residual Chlorine (mg/L) $\gamma$ <sup>2,3</sup>		0.50	Daily	Grab
Selenium (Se) ( $\mu\text{g/L}$ ) <sub>2,3</sub>		---	$\lambda$	Grab
Silver (Ag) ( $\mu\text{g/L}$ ) <sup>2,3</sup>		---	$\lambda$	Grab

<u>Effluent Characteristics</u>	<u>Gross Discharge Limitations</u>		<u>Monitoring Requirements</u>	
	Monthly Avg.	Daily Max	Measurements Frequency	Sample Type
Solids and Other Matters <sup>2,3</sup>	The waters of Puerto Rico shall not contain floating debris, scum or other floating materials attributable to discharge in amounts sufficient to be unsightly or deleterious to the existing or designed uses of the water body.		---	---
Sulfide (Undissociated H <sub>2</sub> S) (µg/L) δ <sup>2,3</sup>		2	Quarterly	Grab
Surfactants (as MBAS) (µg/L) α <sup>2,3,4,6</sup>		608	Monthly	Grab
Suspended, Colloidal or Settleable Solids (mL/L) <sup>1,2,3</sup>	Solids from wastewaters source shall not cause deposition in, or be deleterious to the existing or designated uses of the waters.		Daily	Grab
Taste and Odor-producing Substances <sup>2,3</sup>	Shall not be present in amounts that will render any undesirable taste and/or to edible aquatic life.		---	---
Temperature °F (°C) <sup>2,3</sup>	Except for natural causes no heat may be added to the waters of Puerto Rico, which would cause the temperature of any site to exceed 90 °F (32.2°C).		Daily	Grab
Total Ammonia (mg/l) α <sup>2,3,4,6</sup>		9.000	Monthly	Grab
Total Coliforms (colonies/100 mL) <sup>1,2,3</sup>	The coliforms geometric mean of a series of representative samples (at least five samples) of the waters taken sequentially shall not exceed 10,000 colonies/100 mL.		Monthly	Grab
Total Phosphorus (mg/L) α <sup>2,3,4,6</sup>		5.89	Monthly	Grab

<u>Effluent Characteristics</u>	<u>Gross Discharge Limitations</u>		<u>Monitoring Requirements</u>	
	Monthly Avg.	Daily Max	Measurements Frequency	Sample Type
Total Suspended Solids (mg/L) <sup>3</sup>	See Table I, (page 2)		Weekly	Composite
Turbidity (NTU) $\alpha$ 2,3,4,6		50	Quarterly	Grab
Zinc (Zn) ( $\mu\text{g/L}$ ) $\alpha$ 2,3,4,6		150	Monthly	Grab
Special Conditions	See attached sheet, which contains special conditions that constitute part of this certification.		---	---

1, 2, 3, 4, and 5 see page 16.

To comply with the monitoring requirements specified above, samples shall be taken at the outfall of discharge serial number 001.

All flow measurements shall achieve accuracy within the range of plus or minus 10%.

$\gamma$  See Special Conditions 5 and 6.

$\delta$  See Special Condition 9.

$\xi$  The samples shall be analyzed using the method approved by EPA in letter of February 20, 2007.

$\alpha$  A Waste Load Allocation (WLA) was performed in order to develop the water quality based effluent limitation.

$\lambda$  The permittee shall implement a monthly monitoring program using analytical method approved by EPA with the lowest possible detection level, in accordance with Section 6.2.3 of the PRWQSR as amended, for one (1) year period, after which they will be conducted annually. The monitoring program shall commence no later than thirty (30) days after EDP. The results of the monitoring program shall be submitted to EQB and EPA-Region II no later than sixty (60) days of completion of the one year monitoring program. Based on the evaluation of the results obtained, EQB will determine if more frequent monitoring is necessary. In such case the WQC will be reopened to revise the monitoring frequency if considered necessary.

- φ The permittee shall implement a monthly monitoring program using analytical method approved by EPA with the lowest possible detection level, in accordance with Section 6.2.3 of the PRWQSR as amended, for one (1) year period, after which they will be conducted annually. The monitoring program shall commence no later than thirty (30) days after EDP. The results of the monitoring program shall be submitted to EQB and EPA-Region II no later than sixty (60) days of completion of the one year monitoring program. Based on the evaluation of the results obtained, EQB will determine if an effluent limitation is necessary for this parameter. In such case the WQC will be reopened to include the applicable effluent limitation if considered necessary.

**TABLE A-2                    AMBIENT MONITORING REQUIREMENTS  
WASTE LOAD ALLOCATION (WLA) MONITORING REQUIREMENTS**

The EQB has performed a WLA pursuant to Rule 1310 of the PRWQSR. During the period beginning on EDP + 60 days and lasting through one (1) year, after which the monitoring shall be conducted annually, the permittee shall perform ambient monitoring at the immediate vicinity<sup>Φ</sup> of the discharge station and at the background<sup>Ψ</sup> monitoring station as specified below. Within thirty (30) days of completion of the one year monitoring period, the permittee shall submit a report to EQB and EPA containing the ambient monitoring results obtained as well as the monthly monitoring results obtained during the same time period at the sampling point for discharge 001, for the below parameters. Based on the evaluation of the results obtained, EQB shall determine if the effluent limitations established shall remain as they are or if it is necessary to re-open the WQC to modify (increase or decrease) the effluent limitation for one (1) or more of the below parameters.

Receiving Water Name and Classification: Rio Grande de Loiza, SD

<u>Parameters</u>	<u>Monitoring Requirements</u>	
	<u>Measurements</u> <u>Frequency</u>	<u>Sample Type</u>
Cyanide, Free (CN) (µg/L) <sup>2,3,4,6</sup>	Monthly	Grab
Hardness (as CaCO <sub>3</sub> ) (mg/L) *	Monthly	Grab
Nitrate + Nitrite (as N) (µg/L) <sup>2,3,4,6</sup>	Monthly	Grab
Surfactants (as MBAS) (µg/L) <sup>1,2,3,4,6</sup>	Monthly	Grab
Total Phosphorous (P) (mg/L) <sup>2,3,4,6</sup>	Monthly	Grab
Zinc (Zn) (µg/L) <sup>2,3,4,6</sup>	Monthly	Grab

Notes: \_\_\_\_\_

Φ The immediate vicinity of the discharge station shall be located three hundred ninety nine (399) meters downstream from discharge 001.

Ψ The background sampling station shall be located five (5) meters upstream from discharge 001.

\* Monitoring is only required at the background monitoring station.

**2, 3, 4 and 6 see page 16**



**TABLE A-3 MODEL CALIBRATION MONITORING REQUIREMENTS**

During the period beginning on EDP + 60 days and lasting through one (1) year, the permittee shall implement a monitoring program to obtain the necessary data to calibrate the MULTISMP mathematical model as specified below. Sampling for all parameters shall be performed on the same day. Within thirty (30) days of completion of the one year monitoring program, the permittee shall submit a report to EQB and EPA containing the results obtained as well as the monthly monitoring results obtained during the same time period at the sampling point for discharge 001, for the below parameters.

Receiving Water Name and Classification: Rio Grande de Loiza, SD

**Monitoring Requirements**

<b><u>Parameters</u></b>	<b><u>Measurement Frequency</u></b>	<b><u>Sample Type</u></b>	<b><u>Location</u></b>
BOD <sub>5</sub> (mg/L)	Quarterly	Composite*	A, B, C
BOD <sub>u</sub> (mg/L)	Quarterly	24 – Hour Composite	A
Dissolved Oxygen (mg/L)	Quarterly	Grab	A, B, C
Flow (MGD, cfs)	Quarterly	Instantaneous	B, D
pH (SU)	Quarterly	Grab	A, B, C
Temperature (°F)	Quarterly	Grab	A, B, C
Total Ammonia (NH <sub>3</sub> ) (mg/L)	Quarterly	Composite*	A, B, C
Velocity (Avg.) (ft/s)	Quarterly	Instantaneous	B, D

Notes:

\* Samples shall be taken at one (1) hour intervals for six (6) consecutive hours. These shall be grab samples that will be mixed in equal portions to prepare a composite sample at each one of the required locations.

Sampling Locations:

- A = Point of discharge 001.
- B = Background station, located five (5) meters upstream from discharge 001.
- C = Five (5) points downstream of the discharge 001 along a receiving water segment of one thousand (1,000) feet, as shown in Figure 1 (next page).
- D = Point 5, located one thousand (1,000) feet downstream of the discharge 001

FIGURE - 1

