



STATE OF MAINE
Department of Environmental Protection

John Elias Baldacci
GOVERNOR

David P. Littell
COMMISSIONER

August 2, 2010

Mr. Gregory Trundy
Rumford-Mexico Sewerage District
P.O. Box 160
Rumford, ME. 04276

RE: Maine Pollutant Discharge Elimination System (MEPDES) Permit #ME0101486
Maine Waste Discharge License (WDL) Application #W002686-6B-G-R
Final Permit/License

Dear Mr. Trundy:

Enclosed please find a copy of your **final** Maine MEPDES/WDL which was approved by the Department of Environmental Protection. Please read the permit and its attached conditions carefully. You must follow the conditions in the order to satisfy the requirements of law. Any discharge not receiving adequate treatment is in violation of State Law and is subject to enforcement action.

Any interested person aggrieved by a Department determination made pursuant to applicable regulations, may appeal the decision following the procedures described in the attached DEP FACT SHEET entitled "*Appealing a Commissioner's Licensing Decision.*"

If you have any questions regarding this matter, please feel free to call me at 287-7658.

Sincerely,

A handwritten signature in dark ink, appearing to read "G. Wood".

Gregg Wood
Division of Water Quality Management
Bureau of Land and Water Quality

Enc. Denise Behr, DEP/CMRO
Sandy Mojica, USEPA



STATE OF MAINE
DEPARTMENT OF ENVIRONMENTAL PROTECTION
17 STATE HOUSE STATION
AUGUSTA, ME 04333

DEPARTMENT ORDER

IN THE MATTER OF

RUMFORD-MEXICO SEWERAGE DISTRICT)	MAINE POLLUTANT DISCHARGE
RUMFORD, OXFORD COUNTY, MAINE)	ELIMINATION SYSTEM PERMIT
PUBLICLY OWNED TREATMENT WORKS)	AND
RUMFORD POINT FACILITY)	WASTE DISCHARGE LICENSE
ME0101486)	
W002685-6B-G-R)	
		APPROVAL
		RENEWAL

Pursuant to the provisions of the Federal Water Pollution Control Act, Title 33 USC, Section 1251, *et seq.* and Maine law, 38 M.R.S.A., Section 414-A *et seq.*, and applicable regulations, the Department of Environmental Protection (Department hereinafter) has considered the application of the RUMFORD-MEXICO SEWERAGE DISTRICT (District/permittee hereinafter), with its supportive data, agency review comments, and other related materials on file and FINDS THE FOLLOWING FACTS:

APPLICATION SUMMARY

The District has submitted a timely and complete application to the Department for the renewal of combination Maine Pollutant Discharge Elimination System (MEPDES) permit ME0101486/WDL W002685-5L-F R (permit hereinafter), which was issued by the Department on September 21, 2005, and is due to expire on September 21, 2010. The 9/21/05 permit authorized the monthly average discharge of up to 0.019 million gallons per day (MGD) of secondary treated waste water to the Androscoggin River, Class C, in Rumford, Maine.

PERMIT SUMMARY

This permitting action is carrying forward all the terms and conditions of the 9/21/05 permitting action except that this permit is:

1. Reducing the monthly average (geometric mean) concentration limitation for *E. coli* bacteria based on a new water quality standard adopted subsequent to the 9/21/05 permitting action.
2. Establishing a requirement to submit an annual certification pursuant to Department rule Chapter 530, *Surface Water Toxics Control Program*, adopted subsequent to the 9/21/05 permitting action.
3. Reducing the monitoring frequencies for settleable solids, total residual chlorine and pH based on a review of the previous five-year compliance history.

CONCLUSIONS

BASED on the findings in the attached Fact Sheet dated June 8, 2010, and subject to the Conditions listed below, the Department makes the following CONCLUSIONS:

1. The discharge, either by itself or in combination with other discharges, will not lower the quality of any classified body of water below such classification.
2. The discharge, either by itself or in combination with other discharges, will not lower the quality of any unclassified body of water below the classification which the Department expects to adopt in accordance with state law.
3. The provisions of the State's antidegradation policy, 38 M.R.S.A. §464(4)(F), will be met, in that:
 - (a) Existing in-stream water uses and the level of water quality necessary to protect and maintain those existing uses will be maintained and protected;
 - (b) Where high quality waters of the State constitute an outstanding national resource, that water quality will be maintained and protected;
 - (c) The standards of classification of the receiving water body are met or, where the standards of classification of the receiving water body are not met, the discharge will not cause or contribute to the failure of the water body to meet the standards of classification;
 - (d) Where the actual quality of any classified receiving water body exceeds the minimum standards of the next highest classification that higher water quality will be maintained and protected; and
 - (e) Where a discharge will result in lowering the existing water quality of any water body, the Department has made the finding, following opportunity for public participation, that this action is necessary to achieve important economic or social benefits to the State.
4. The discharge will be subject to effluent limitations that require application of best practicable treatment as defined in Maine law, 38 M.R.S.A., §414-A(1)(D).

ACTION

THEREFORE, the Department APPROVES the above noted application of the RUMFORD-MEXICO SEWERAGE DISTRICT to discharge a monthly average flow of up to 0.019 MGD of secondary treated waste water to the Androscoggin River, Class C, in Rumford, Maine, SUBJECT TO THE ATTACHED CONDITIONS, and all applicable standards and regulations including:

1. *“Maine Pollutant Discharge Elimination System Permit Standard Conditions Applicable To All Permits,”* revised July 1, 2002, copy attached.
2. The attached Special Conditions, including any effluent limitations and monitoring requirements.
3. This permit becomes effective upon the date of signature and expires at midnight five (5) years thereafter.

PLEASE NOTE ATTACHED SHEET FOR GUIDANCE ON APPEAL PROCEDURES

Date of initial receipt of application: May 26, 2010
Date of application acceptance: May 26, 2010

This Order prepared by GREGG WOOD, BUREAU OF LAND & WATER QUALITY
ME0101486 2010 7/27/10

SPECIAL CONDITIONS

A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

- Beginning the effective date of this permit, the permittee is authorized to discharge secondary treated sanitary wastewater from **Outfall #001** to the Androscoggin River. Such discharges shall be limited and monitored by the permittee as specified below⁽¹⁾:

Effluent Characteristic	Discharge Limitations						Minimum Monitoring Requirements	
	<u>Monthly Average</u> as specified	<u>Weekly Average</u> as specified	<u>Daily Maximum</u> as specified	<u>Monthly Average</u> As specified	<u>Weekly Average</u> as specified	<u>Daily Maximum</u> as specified	<u>Measurement Frequency</u> as specified	<u>Sample Type</u> as specified
Flow [50050]	0.019 MGD [03]	---	Report MGD [03]	---	---	---	Continuous [99/99]	Recorder [RC]
BOD₅ [00310]	4.8 lbs./day [26]	7.1 lbs./day [26]	7.9 lbs./day [26]	30 mg/L [19]	45 mg/L [19]	50 mg/L [19]	2/Month [02/30]	Composite ⁽²⁾ [24]
BOD₅ Percent Removal⁽³⁾ [81010]	---	---	---	85% [23]	---	---	1/Month [01/30]	Calculate [CA]
TSS [00530]	4.8 lbs./day [26]	7.1 lbs./day [26]	7.9 lbs./day [26]	30 mg/L [19]	45 mg/L [19]	50 mg/L [19]	2/Month [02/30]	Composite ⁽²⁾ [24]
TSS Percent Removal⁽³⁾ [81011]	---	---	---	85% [23]	---	---	1/Month [01/30]	Calculate [CA]
Settleable Solids [00545]	---	---	---	---	---	0.3 ml/L [25]	2/Week [02/07]	Grab [GR]
<i>E. coli</i> Bacteria⁽⁴⁾ [31633]	---	---	---	126/100 ml ⁽⁵⁾ [13]	---	949/100 ml [13]	2/Month [02/30]	Grab [GR]
Total Residual Chlorine⁽⁶⁾ [50060]	---	---	---	---	---	1.0 mg/L [19]	2/Week [02/07]	Grab [GR]
pH [00400]	---	---	---	---	---	6.0 – 9.0 SU [12]	2/Week [02/07]	Grab [GR]

The italicized numeric values bracketed in the table and in subsequent text are code numbers that Department personnel utilize to code the monthly Discharge Monitoring Reports.

FOOTNOTES: See Page 6 of this permit for applicable footnotes.

SPECIAL CONDITIONS

A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS (cont'd)

Footnotes:

1. **Monitoring** – All effluent monitoring shall be conducted at a location following the last treatment unit in the treatment process as to be representative of end-of-pipe effluent characteristics. Any change in sampling location must be approved by the Department in writing.

Sampling and analysis must be conducted in accordance with; a) methods approved in 40 Code of Federal Regulations (CFR) Part 136, b) alternative methods approved by the Department in accordance with the procedures in 40 CFR Part 136, or c) as otherwise specified by the Department. Samples that are sent out for analysis shall be analyzed by a laboratory certified by the State of Maine's Department of Human Services. Samples that are sent to another POTW licensed pursuant to *Waste discharge licenses*, 38 M.R.S.A. § 413 or laboratory facilities that analyze compliance samples in-house are subject to the provisions and restrictions of *Maine Comprehensive and Limited Environmental Laboratory Certification Rules*, 10-144 CMR 263 (last amended February 13, 2000).

All analytical test results shall be reported to the Department including results which are detected below the respective reporting limits (RLs) specified by the Department or as specified by other approved test methods. See **Attachment A** of this permit for a list of the Department's RLs. If a non-detect analytical test result is below the respective RL, the concentration result shall be reported as <Y where Y is the detection limit achieved by the laboratory for each respective parameter. Reporting a value of <Y that is greater than an established RL is not acceptable and will be rejected by the Department. For mass, if the analytical result is reported as <Y or if a detectable result is less than a RL, report a <X lbs/day, where X is the parameter specific limitation established in the permit.

2. **BOD and TSS Sample Type** – Composite sample based on time interval, not flow proportioned.
3. **Percent Removal** – The treatment facility shall maintain a minimum of 85 percent removal of both biochemical oxygen demand and total suspended solids for all flows receiving secondary treatment. The percent removal shall be calculated based on influent and effluent concentration values. The percent removal shall be waived when the monthly average influent concentration is less than 200 mg/L. For instances when this occurs, the facility shall report "NODI-9" for this parameter on the monthly Discharge Monitoring Report (DMR).
4. ***E. coli* bacteria** – *E. coli* bacteria limits and monitoring requirements are seasonal and apply between May 15 and September 30 of each year. The Department reserves the right to require year-round disinfection to protect the health, safety and welfare of the public.
5. **Bacteria Reporting** – The monthly average *E. coli* bacteria limitation is a geometric mean limitation and sample results shall be reported as such.

SPECIAL CONDITIONS

A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS (cont'd)

Footnotes:

6. **Total residual chlorine (TRC)** – Limitations and monitoring requirements are applicable whenever elemental chlorine or chlorine based compounds are being used to disinfect the discharge. The permittee shall utilize approved test methods that are capable of bracketing the limitations in this permit. For instances when a facility has not disinfected with chlorine-based compounds for an entire reporting period, the facility shall report “NODI-9” for this parameter on the monthly DMR.

B. NARRATIVE EFFLUENT LIMITATIONS

1. The effluent shall not contain a visible oil sheen, foam or floating solids at any time which would impair the usages designated by the classification of the receiving waters.
2. The effluent shall not contain materials in concentrations or combinations which are hazardous or toxic to aquatic life, or which would impair the usages designated by the classification of the receiving waters.
3. The discharge shall not cause visible discoloration or turbidity in the receiving waters which would impair the usages designated by the classification of the receiving waters.
4. Notwithstanding specific conditions of this permit the effluent must not lower the quality of any classified body of water below such classification, or lower the existing quality of any body of water if the existing quality is higher than the classification.

C. TREATMENT PLANT OPERATOR

The person who has the management responsibility over the treatment facility must hold a **Grade II** certificate (or higher) or must be a Maine Registered Professional Engineer pursuant to *Sewerage Treatment Operators*, Title 32 M.R.S.A., Sections 4171-4182 and *Regulations for Wastewater Operator Certification*, 06-096 CMR 531 (effective May 8, 2006). All proposed contracts for facility operation by any person must be approved by the Department before the permittee may engage the services of the contract operator.

D. LIMITATIONS FOR INDUSTRIAL USERS

Pollutants introduced into the wastewater collection and treatment system by a non-domestic source (user) shall not pass through or interfere with the operation of the treatment system.

SPECIAL CONDITIONS

E. UNAUTHORIZED DISCHARGES

The permittee is authorized to discharge only in accordance with: 1) the permittee's General Application for Waste Discharge Permit, accepted for processing on May 26, 2010; 2) the terms and conditions of this permit; and 3) only from Outfall #001. Discharges of waste water from any other point source are not authorized under this permit, and shall be reported in accordance with Standard Condition B(5)(*Bypass*) of this permit.

F. NOTIFICATION REQUIREMENT

In accordance with Standard Condition D, the permittee shall notify the Department of the following.

1. Any introduction of pollutants into the wastewater collection and treatment system from an indirect discharger in a primary industrial category discharging process wastewater; and
2. Any substantial change (increase or decrease) in the volume or character of pollutants being introduced into the wastewater collection and treatment system by a source introducing pollutants into the system at the time of permit issuance. For the purposes of this section, notice regarding substantial change shall include information on:
 - (a) the quality and quantity of wastewater introduced to the wastewater collection and treatment system; and
 - (b) any anticipated impact caused by the change in the quantity or quality of the wastewater to be discharged from the treatment system.

G. OPERATION & MAINTENANCE (O&M) PLAN

The permittee shall maintain a current written comprehensive Operation & Maintenance (O&M) Plan at the facility. The plan shall provide a systematic approach by which the permittee shall at all times, properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit.

By December 31 of each year, or within 90 days of any process changes or minor equipment upgrades, the permittee shall evaluate and modify the O&M Plan including site plan(s) and schematic(s) for the wastewater treatment facility to ensure that it is up-to-date. The O&M Plan shall be kept on-site at all times and made available to Department and USEPA personnel upon request.

Within 90 days of completion of new and or substantial upgrades of the wastewater treatment facility, the permittee shall submit the updated O&M Plan to their Department inspector for review and comment.

SPECIAL CONDITIONS

H. MERCURY

All mercury sampling (2/Year) required by this permit or required to determine compliance with interim limitations established pursuant to Department rule Chapter 519, shall be conducted in accordance with EPA's "clean sampling techniques" found in EPA Method 1669, Sampling Ambient Water For Trace Metals At EPA Water Quality Criteria Levels. All mercury analysis shall be conducted in accordance with EPA Method 1631, Determination of Mercury in Water by Oxidation, Purge and Trap, and Cold Vapor Fluorescence Spectrometry. See **Attachment B**, *Effluent Mercury Test Report*, of this permit for the Department's form for reporting mercury test results.

I. DISPOSAL OF TRANSPORTED WASTE INTO THE WASTE WATER TREATMENT FACILITY

The permittee is prohibited from accepting transported waste for disposal into any part or parts of the waste water disposal system. Transported wastes" means any liquid non-hazardous waste delivered to a waste water treatment facility by a truck or other similar conveyance that has different chemical constituents or a greater strength than the influent described on the facility's application for a waste discharge license. Such wastes may include, but are not limited to septage, industrial wastes or other wastes to which chemicals in quantities potentially harmful to the treatment facility or receiving water have been added.

J. CHAPTER 530(2)(D)(4) CERTIFICATION

By December 31 of each calendar year, the permittee shall provide the Department with a certification describing any of the following that have occurred since the effective date of this permit [*PCS Code 95799*]: *J*: See **Attachment C** of the Fact Sheet of this permit for an acceptable certification form to satisfy this Special Condition.

1. Increases in the number, types and flows of industrial, commercial or domestic discharges to the facility that in the judgment of the Department may cause the receiving water to become toxic.
2. Changes in the condition or operations of the facility that may increase the toxicity of the discharge.
3. Changes in storm water collection or inflow/infiltration affecting the facility that may increase the toxicity of the discharge.
4. Increases in the type or volume of hauled wastes accepted by the facility.
5. The Department reserves the right to impose annual (surveillance level) testing or other toxicity testing if new information becomes available that indicates the discharge may cause or have a reasonable potential to cause exceedences of ambient water quality criteria/thresholds.

SPECIAL CONDITIONS

K. REOPENING OF PERMIT FOR MODIFICATIONS

Upon evaluation of the tests results or monitoring requirements specified in Special Conditions of this permitting action, new site specific information, or any other pertinent test results or information obtained during the term of this permit, the Department may, at any time, and with notice to the permittee, modify this permit to: (1) include effluent limits necessary to control specific pollutants or whole effluent toxicity where there is a reasonable potential that the effluent may cause water quality criteria to be exceeded; (2) require additional effluent or ambient water quality monitoring if results on file are inconclusive; or (3) change monitoring requirements or limitations based on new information.

L. MONITORING AND REPORTING

Monitoring results obtained during the previous month shall be summarized for each month and reported on separate Discharge Monitoring Report (DMR) forms provided by the Department and shall be postmarked by the thirteenth (13th) day of the month or hand-delivered to a Department Regional Office such that the DMRs are received by the Department by the fifteenth (15th) day of the month following the completed reporting period. A signed copy of the DMR and all other reports required herein shall be submitted, unless otherwise specified, to the Department's facility inspector at:

Department of Environmental Protection
Central Maine Regional Office
Bureau of Land and Water Quality
Division of Water Quality Management
17 State House Station
Augusta, Maine 04333

Alternatively, if you are submitting an electronic DMR (eDMR), the completed eDMR must be electronically submitted to the Department by a facility authorized DMR Signatory not later than close of business on the 15th day of the month following the completed reporting period. Hard Copy documentation submitted in support of the eDMR must be postmarked on or before the thirteenth (13th) day of the month or hand-delivered to the Department's Regional Office such that it is received by the Department on or before the fifteenth (15th) day of the month following the completed reporting period. Electronic documentation in support of the eDMR must be submitted not later than close of business on the 15th day of the month following the completed reporting period.

M. SEVERABILITY

In the event that any provision, or part thereof, of this permit is declared to be unlawful by a reviewing court, the remainder of the permit shall remain in full force and effect, and shall be construed and enforced in all respects as if such unlawful provision, or part thereof, had been omitted, unless otherwise ordered by the court.

ATTACHMENT A

Maine Department of Environmental Protection
WET and Chemical Specific Data Report Form
This form is for reporting laboratory data and facility information. Official compliance reviews will be done by DEP.

Facility Name

MEPDES #

Pipe #

Facility Representative Signature

To the best of my knowledge this information is true, accurate and complete.

Licensed Flow (MGD)

Acute dilution factor

Chronic dilution factor

Human health dilution factor

Criteria type: M(marine) or F(fresh)

Flow for Day (MGD)⁽¹⁾

Flow Avg. for Month (MGD)⁽²⁾

Date Sample Collected

Date Sample Analyzed

Laboratory Address

Telephone

Lab Contact

Lab ID #

FRESH WATER VERSION

Please see the footnotes on the last page.

Please see the footnotes on the last page.											
Effluent Concentration (ug/L or as noted)											
Receiving Water or Ambient											
WET Result, % Do not enter % sign											
Reporting Limit Check											
Possible Exceedence (7)											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											
Health											
Acute											
Chronic											

Maine Department of Environmental Protection
WET and Chemical Specific Data Report Form
This form is for reporting laboratory data and facility information. Official compliance reviews will be done by DEP.

PRIORITY POLLUTANTS ⁽⁴⁾		Reporting Limit			Effluent Limits		Health ⁽⁶⁾		Reporting Limit Check	Possible Exceedence ⁽⁷⁾	
					Acute ⁽⁶⁾	Chronic ⁽⁶⁾	Health ⁽⁶⁾			Acute	Chronic
M	ANTIMONY	5									
M	BERYLLIUM	2									
M	MERCURY (5)	0.2									
M	SELENIUM	5									
M	THALLIUM	4									
A	2,4,6-TRICHLOROPHENOL	3									
A	2,4-DICHLOROPHENOL	5									
A	2,4-DIMETHYLPHENOL	5									
A	2,4-DINITROPHENOL	45									
A	2-CHLOROPHENOL	5									
A	2-NITROPHENOL	5									
A	4,6-DINITRO-O-CRESOL (2-Methyl-4,6-dinitrophenol)	25									
A	4-NITROPHENOL	20									
A	P-CHLORO-M-CRESOL (3-methyl-4-chlorophenol)+B80	5									
A	PENTACHLOROPHENOL	20									
A	PHENOL	5									
BN	1,2,4-TRICHLOROBENZENE	5									
BN	1,2-(O)DICHLOROBENZENE	5									
BN	1,2-DIPHENYLHYDRAZINE	10									
BN	1,3-(M)DICHLOROBENZENE	5									
BN	1,4-(P)DICHLOROBENZENE	5									
BN	2,4-DINITROTOLUENE	6									
BN	2,6-DINITROTOLUENE	5									
BN	2-CHLORONAPHTHALENE	5									
BN	3,3'-DICHLOROBENZIDINE	16.5									
BN	3,4-BENZO(B)FLUORANTHENE	5									
BN	4-BROMOPHENYLPHENYL ETHER	2									
BN	4-CHLOROPHENYL PHENYL ETHER	5									
BN	ACENAPHTHENE	5									
BN	ACENAPHTHYLENE	5									
BN	ANTHRACENE	5									
BN	BENZIDINE	45									
BN	BENZO(A)ANTHRACENE	8									
BN	BENZO(A)PYRENE	3									
BN	BENZO(G,H,I)PERYLENE	5									
BN	BENZO(K)FLUORANTHENE	3									
BN	BIS(2-CHLOROETHOXY)METHANE	5									
BN	BIS(2-CHLOROETHYL)ETHER	6									
BN	BIS(2-CHLOROISOPROPYL)ETHER	6									
BN	BIS(2-ETHYLHEXYL)PHTHALATE	3									
BN	BUTYLBENZYL PHTHALATE	5									
BN	CHRYSENE	3									
BN	DI-N-BUTYL PHTHALATE	5									
BN	DI-N-OCTYL PHTHALATE	5									
BN	DIBENZO(A,H)ANTHRACENE	5									
BN	DIETHYL PHTHALATE	5									
BN	DIMETHYL PHTHALATE	5									

This form is for reporting laboratory data and facility information. Official compliance reviews will be done by DEP.

[illegible]

This form is for reporting laboratory data and facility information. Official compliance reviews will be done by DEP.

[illegible]

Notes:

- (1) Flow average for day pertains to WET/PP composite sample day.
- (2) Flow average for month is for month in which WET/PP sample was taken.
- (3) Analytical chemistry parameters must be done as part of the WET test chemistry.
- (4) Priority Pollutants should be reported in micrograms per liter (ug/L).
- (5) Mercury is often reported in nanograms per liter (ng/L) by the contract laboratory, so be sure to convert to micrograms per liter on this spreadsheet.
- (6) Effluent Limits are calculated based on dilution factor, background allocation (10%) and water quality reserves (15% - to allow for new or changed discharges or non-point sources).
- (7) Possible Exceedence determinations are done for a single sample only on a mass basis using the actual pounds discharged. This analysis does not consider watershed wide allocations for fresh water discharges.
- (8) These tests are optional for the receiving water. However, where possible samples of the receiving water should be preserved and saved for the duration of the WET test. In the event of questions about the receiving water's possible effect on the WET results, chemistry tests should then be conducted.
- (9) pH and Total Residual Chlorine must be conducted at the time of sample collection. Tests for Total Residual Chlorine need be conducted only when an effluent has been chlorinated or residual chlorine is believed to be present for any other reason.

Comments:

ATTACHMENT B

Effluent Mercury Test Report

Name of Facility: _____

Federal Permit # ME _____

Pipe # _____

Purpose of this test: ☐ Initial limit determination
☐ Compliance monitoring for: year _____ calendar quarter _____
☐ Supplemental or extra test

SAMPLE COLLECTION INFORMATION

Sampling Date:

--	--	--

 Sampling time: _____ AM/PM
mm dd yy

Sampling Location: _____

Weather Conditions: _____

Please describe any unusual conditions with the influent or at the facility during or preceding the time of sample collection:

Optional test - not required but recommended where possible to allow for the most meaningful evaluation of mercury results:

Suspended Solids _____ mg/L Sample type: _____ Grab (recommended) or
_____ Composite

ANALYTICAL RESULT FOR EFFLUENT MERCURY

Name of Laboratory: _____

Date of analysis: _____ **Result:** ng/L (PPT)**Please Enter Effluent Limits for your facility**Effluent Limits: **Average** = _____ ng/L **Maximum** = _____ ng/L

Please attach any remarks or comments from the laboratory that may have a bearing on the results or their interpretation. If duplicate samples were taken at the same time please report the average.

CERTIFICATION

I certify that to the best of my knowledge the foregoing information is correct and representative of conditions at the time of sample collection. The sample for mercury was collected and analyzed using EPA Methods 1669 (clean sampling) and 1631 (trace level analysis) in accordance with instructions from the DEP.

By: _____ Date: _____

Title: _____

PLEASE MAIL THIS FORM TO YOUR ASSIGNED INSPECTOR

**MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT
AND
MAINE WASTE DISCHARGE LICENSE**

FACT SHEET

DATE: **June 8, 2010**

PERMIT NUMBER: **ME0101486**
LICENSE NUMBER: **W002685-6B-G-R**

NAME AND ADDRESS OF APPLICANT:

**RUMFORD MEXICO SEWERAGE DISTRICT
P.O.Box 160
Rumford, Maine 04276**

COUNTY: **Oxford**

NAME AND ADDRESS WHERE DISCHARGE OCCURS:

**Rumford-Mexico Sewerage District
US Route 2 – River Road
Rumford (Point), Maine 04276**

RECEIVING WATER/CLASSIFICATION: **Androscoggin River/Class C**

COGNIZANT OFFICIAL AND TELEPHONE NUMBER: **Mr. Gregory Trundy
Superintendent
(207) 364-7225**
e-mail: gtrundy@hotmail.com

1. APPLICATION SUMMARY

- a. Application: The Rumford-Mexico Sewerage District (District) has submitted a timely and complete application to the Department for the renewal of combination Maine Pollutant Discharge Elimination System (MEPDES) permit ME0101486/WDL W002685-5L-F R (permit hereinafter), which was issued by the Department on September 21, 2005 and is due to expire on September 21, 2010. The 9/21/05 permit authorized the monthly average discharge of up to 0.019 million gallons per day (MGD) of secondary treated waste water to the Androscoggin River, Class C, in Rumford, Maine. See **Attachment A** of this Fact Sheet for a location map.

1. APPLICATION SUMMARY (cont'd)

- b. Source Description: The Rumford Point waste water treatment facility receives sanitary wastewater flows from 12-15 residential users in the Rumford Point area within the District's boundaries. The facility does not receive industrial flows and is not authorized to receive septage. The collection system is a 100% separated sewer system with no known combined sewer overflow (CSO) points. All flow into the treatment facility is by gravity and there are no pump stations.
- c. Wastewater Treatment: The Rumford Point wastewater treatment facility provides a secondary level of treatment via a package treatment plant system that includes a bar rack, an aeration basin with diffused aeration, one secondary clarifier, solids handling and a chlorine contact tank. The facility has been authorized to discontinue chlorination between October 1 and May 14 of each year. Waste sludge is removed and transported to the District's other treatment plant located in Mexico where it is utilized in the sludge compost process. See **Attachment B** of this Fact Sheet for a schematic of the treatment process.

Final effluent is conveyed for discharge to the Androscoggin River via a 6-inch diameter outfall pipe that terminates on the shore of the river.

2. PERMIT SUMMARY

- a. Terms and Conditions - This permitting action is carrying forward all the terms and conditions of the 9/21/05 permitting action except that this permit is:
 - 1. Reducing the monthly average (geometric mean) concentration limitation for *E. coli* bacteria based on a new water quality standard adopted subsequent to the 9/21/05 permitting action.
 - 2. Establishing a requirement to submit an annual certification pursuant to Department rule Chapter 530, *Surface Water Toxics Control Program*, adopted subsequent to the 9/21/05 permitting action.
 - 3. Reducing the monitoring frequencies for settleable solids, total residual chlorine and pH based on a review of the previous five-year compliance history.

- b. History: The most recent licensing/permitting actions include the following:

April 20, 1994 – The Department issued WDL #W002685-58-C-R to the District for the monthly average discharge of up to 0.019 MGD of secondary treated wastewater to the Androscoggin River in Rumford. The 4/20/94 WDL superseded WDL #W002685-58-B-R issued on March 8, 1989, and previous WDLs issued on September 14, 1983, March 28, 1979 and August 13, 1974.

2. PERMIT SUMMARY (cont'd)

September 1, 1994 – The U.S. Environmental Protection Agency (USEPA) issued National Pollutant Discharge Elimination System (NPDES) permit #ME0101486 to the District for the discharge from the Rumford Point Facility.

February 15, 1995 – The Department issued a letter to the District exempting the Rumford Point Facility from toxics testing under Department rule Chapter 530.5, *Surface Water Toxics Control Program* on the basis that the discharge is less than 50,000 gallons per day of domestic sewage and that the facility is a USEPA minor facility of less than 1.0 MGD and has a chronic dilution factor of greater than 1000:1.

May 23, 2000 – Pursuant to Maine law, 38 M.R.S.A. §420 and §413 and Department rule, 06-096 CMR Chapter 519, *Interim Effluent Limitations and Controls for the Discharge of Mercury*, the Department issued a *Notice of Interim Limits for the Discharge of Mercury* to the permittee thereby administratively modifying WDL #W002685-58-C-R by establishing interim monthly average and daily maximum effluent concentration limits of 4.5 parts per trillion (ppt) and 6.8 ppt, respectively, and a minimum monitoring frequency requirement of 2 tests per year for mercury.

August 8, 2000 – The Department issued WDL #W002685-5L-D-R to the District for the monthly average discharge of up to 0.019 MGD of secondary treated wastewater to the Androscoggin River in Rumford. The 8/8/00 WDL superseded WDL #W002685-58-C-R issued on April 20, 1994 and is scheduled to expire on August 8, 2005.

January 12, 2001 – The Department received authorization from the USEPA to administer the National NPDES permit program in Maine, excluding areas of special interest to Maine Indian Tribes. From that point forward, the program has been referred to as the Maine Pollutant Discharge Elimination System (MEPDES) permit program.

June 29, 2001 – The Department issued WDL Modification #W002685-5L-E-M / MEPDES permit #ME0101486 to the District for the monthly average discharge of up to 0.019 MGD of secondary treated wastewater to the Androscoggin River in Rumford. The 6/29/01 MEPDES permit is scheduled to expire on August 8, 2005.

July 18, 2005 – The USEPA approved a total maximum daily load (TMDL) entitled, May 2005 TMDL, Final for the Androscoggin River.

September 21, 2005 – The Department issued combination MEPDES permit ME0101486/WDL W002685-5L-F R for a five year term.

May 26, 2010 – The Rumford Mexico Sewerage District submitted a timely and complete application to the Department for the renewal of the 9/21/05 permit.

3. CONDITIONS OF PERMITS

Maine law, 38 M.R.S.A. Section 414-A, requires that the effluent limitations prescribed for discharges, including, but not limited to, effluent toxicity, require application of best practicable treatment (BPT), be consistent with the U.S. Clean Water Act, and ensure that the receiving waters attain the State water quality standards as described in Maine's Surface Water Classification System. In addition, 38 M.R.S.A., Section 420 and Department rule 06-096 CMR Chapter 530, *Surface Water Toxics Control Program*, require the regulation of toxic substances not to exceed levels set forth in Department rule 06-096 CMR Chapter 584, *Surface Water Quality Criteria for Toxic Pollutants*, and that ensure safe levels for the discharge of toxic pollutants such that existing and designated uses of surface waters are maintained and protected.

4. RECEIVING WATER QUALITY STANDARDS

Maine law, 38 M.R.S.A., §467(1)(A)(2) classifies the Androscoggin River at the point of discharge as a Class C waterway. Maine law, 38 M.R.S.A., §465(4), describes the standards for Class C waters.

5. RECEIVING WATER QUALITY CONDITIONS

The State of Maine 2008 Integrated Water Quality Monitoring and Assessment Report, prepared pursuant to Sections 303(d) and 305(b) of the Federal Water Pollution Control Act, lists a 8.19-mile reach of the Androscoggin River, main stem, upstream of Gulf Island Pond (ADB Assessment Unit ID #ME0104000208), in *Category 4-A: Rivers and Streams with Impaired Use, TMDL Completed*. The impairments are deficient dissolved oxygen levels caused by the discharge of BOD, TSS and phosphorus and the designated use of recreation in and on the water is impaired due to algal blooms caused by the discharge of phosphorus.

The State of Maine 2008 Integrated Water Quality Monitoring and Assessment Report, also lists 137 miles of the Androscoggin River from the Maine New Hampshire border to Brunswick is list in *Category 5-D: Rivers and Streams Impaired by Legacy Pollutants*. The designated use of fish consumption is impaired due to the historic presence of the legacy pollutants including polychlorinated biphenyls and dioxin.

The State of Maine 2008 Integrated Water Quality Monitoring and Assessment Report, lists all freshwaters in Maine as “*Category 4-A: Rivers and Streams with Impaired Use, TMDL Completed*” Impairment in this context refers to the designated use of recreational fishing due to elevated levels of mercury in some fish caused by atmospheric deposition. As a result, the State has established a fish consumption advisory for all freshwaters in Maine. Pursuant to Maine law, 38 M.R.S.A. §420(1-B)(B), “*a facility is not in violation of the ambient criteria for mercury if the facility is in compliance with an interim discharge limit established by the Department pursuant to section 413 subsection 11.*” The Department has established interim monthly average and daily maximum mercury concentration limits for this facility.

6. EFFLUENT LIMITATIONS & MONITORING REQUIREMENTS

- a. Flow: The previous permitting action established a monthly average discharge flow limit of 0.019 million gallons per day (19,000 gallons per day) based on the design capacity of the treatment facility, and a daily maximum discharge flow reporting requirement, which are being carried forward in this permitting action. This permitting action is also carrying forward the continuous recorder monitoring requirement for discharge flow.

A review of the monthly DMR data for the period January 2007 - February 2010 indicates the permittee has been in compliance with said limit(s) as values have been reported as follows:

Flow (DMRs=38)

Value	Limit (gpd)	Range (gpd)	Mean (gpd)
Monthly Average	19,000	200 – 2,000	600
Daily Maximum	Report	400 – 2,700	1,215

- b. Dilution Factors: Dilution factors associated with the discharge from the Rumford Point facility were derived in accordance with freshwater protocols established in Department Regulation Chapter 530, *Surface Water Toxics Control Program*, October 2005. With a monthly average plant design flow of 0.019 MGD, dilution calculations are as follows:

$$\text{Acute: } 1Q10 = 1,663 \text{ cfs} \Rightarrow \frac{(1,663 \text{ cfs})(0.6464) + 0.019 \text{ MGD}}{0.019 \text{ MGD}} = 56,578:1$$

$$\text{Modified Acute: } \frac{1}{4} 1Q10 = 416 \text{ cfs} \Rightarrow \frac{(416 \text{ cfs})(0.6464) + 0.019 \text{ MGD}}{0.019 \text{ MGD}} = 14,154:1$$

$$\text{Chronic: } 7Q10 = 1,663 \text{ cfs} \Rightarrow \frac{(1,663 \text{ cfs})(0.6464) + 0.019 \text{ MGD}}{0.019 \text{ MGD}} = 56,578:1$$

$$\text{Harmonic Mean} = 2,795 \text{ cfs} \Rightarrow \frac{(2,795 \text{ cfs})(0.6464) + 0.019 \text{ MGD}}{0.019 \text{ MGD}} = 95,094:1$$

Department rule Chapter 530 states:

Analysis using numerical acute criteria for aquatic life must be based on 1/4 of the 1Q10 stream design flow to prevent substantial acute toxicity within any mixing zone, according to EPA's Mixing Zone Policy and to ensure a Zone of Passage of at least 3/4 of the cross-sectional area of any stream as required by Department rule. Where it can be demonstrated that a discharge achieves complete and rapid mixing with the receiving water, by way of an efficient diffuser or other effective method, analyses may use a greater proportion of the stream design flow, up to and including all of it, as long as the required Zone of Passage is maintained.

6. EFFLUENT LIMITATIONS & MONITORING REQUIREMENTS (cont'd)

The outfall pipe associated with the discharge from the District's Rumford Point Facility terminates on the shoreline of the Androscoggin River. Therefore, this permitting action is utilizing the default stream flow of ¼ 1Q10 in acute evaluations in accordance with Chapter 530.

- c. Biochemical Oxygen Demand (BOD₅) and Total Suspended Solids (TSS): The previous permitting action established monthly average and weekly average BOD₅ & TSS concentration limits of 30 mg/L and 45 mg/L, respectively, which were based on secondary treatment requirements of Department rule 06-096 CMR Chapter 525(3)(III). The previous permitting action also established daily maximum BOD₅ & TSS concentration limits of 50 mg/L based on a Department best professional judgment (BPJ) of best practicable treatment (BPT). All three technology-based concentration limits are being carried forward in this permitting action.

Department rule 06-096 CMR Chapter 523(6)(f) states that all pollutants limited in permits shall have limitations, standards or prohibitions expressed in terms of mass. The previous permitting action established monthly average, weekly average and daily maximum technology-based mass limits of 4.8 lbs./day, 7.1 lbs./day, and 7.9 lbs./day, respectively, for BOD₅ & TSS, which are being carried forward in this permitting action and were derived as follows:

Monthly Average Mass Limit: $(30 \text{ mg/L})(8.34 \text{ lbs./gallon})(0.019 \text{ MGD}) = 4.8 \text{ lbs./day}$

Weekly Average Mass Limit: $(45 \text{ mg/L})(8.34 \text{ lbs./gallon})(0.019 \text{ MGD}) = 7.1 \text{ lbs./day}$

Daily Maximum Mass Limit: $(50 \text{ mg/L})(8.34 \text{ lbs./gallon})(0.019 \text{ MGD}) = 7.9 \text{ lbs./day}$

The previous permitting action established, and this permitting action is carrying forward, a requirement for a minimum of 85% removal of BOD₅ & TSS pursuant to Department rule 06-096 CMR Chapter 525(3)(III)(a)(3) and (b)(3).

This permitting action is carrying forward the minimum monitoring frequency requirement of twice per month (2/Month) based on Department guidance for POTWs permitted to discharge up to 0.1 MGD.

6. EFFLUENT LIMITATIONS & MONITORING REQUIREMENTS (cont'd)

A review of the monthly Discharge Monitoring Report (DMR) data for the period January 2007 – February 2010 indicates the permittee has been in compliance with said limit(s) as values have been reported as follows:

BOD Mass (DMRs=38)

Value	Limit (lbs/day)	Range (lbs/day)	Average (lbs/day)
Monthly Average	4.8	0.003 – 0.08	0.023
Weekly Average	7.1	0.004 – 0.13	0.035
Daily Maximum	7.9	0.004 – 0.13	0.035

BOD Concentration (DMRs=38)

Value	Limit (mg/L)	Range (mg/L)	Average (mg/L)
Monthly Average	30	6.7	1.4 – 20
Weekly Average	45	8.9	2.3 – 30
Daily Maximum	50	8.9	2.3 – 30

TSS mass (DMRs=38)

Value	Limit (lbs/day)	Range (lbs/day)	Average (lbs/day)
Monthly Average	4.8	0.003 – 0.13	0.024
Weekly Average	45	0.003 – 0.25	0.038
Daily Maximum	7.9	0.003 – 0.25	0.038

TSS concentration (DMRs=38)

Value	Limit (mg/L)	Range (mg/L)	Average (mg/L)
Monthly Average	30	1.2 – 9.9	5.2
Weekly Average	45	1.4 – 32	6.6
Daily Maximum	50	1.4 - 32	6.6

- d. Settleable Solids: The previous permitting action established a daily maximum technology-based concentration limit of 0.3 ml/L for settleable solids and a minimum monitoring frequency requirement of five times per week (5/Week). The daily maximum concentration limit of 0.3 ml/L is based on a Department BPJ determination and provides sufficient information to assess whether the treatment facility is providing BPT and is being carried forward in this permitting action. The monitoring frequency requirement of 5/Week is being reduced to 2/Week given the excellent compliance history over the five-year term of the 9/21/05 permitting action.

A review of the monthly Discharge Monitoring Report (DMR) data for the period January 2007 – February 2010 indicates the following:

Settleable solids (n=38)

Value	Limit (ml/L)	Range (mg/L)	Average (mg/L)
Daily Maximum	0.3	<0.1 - <0.1	<0.1

6. EFFLUENT LIMITATIONS & MONITORING REQUIREMENTS (cont'd)

- e. *E. coli* Bacteria The previous permitting action established seasonal (May 15 – September 30) monthly average and daily maximum *E. coli* bacteria limits of 142 colonies/100 ml and 949 colonies/100 ml respectively, based on the State of Maine Water Classification Program criteria for Class C waters found at Maine law, 38 MRSA, §465(4). During calendar year 2005, Maine's Legislature approved new monthly average and daily maximum water quality standards of 126 colonies/100 ml and 236 colonies/100 ml respectively, for water bodies designated as Class C.

This permitting is establishing the new monthly average limit of 126 colonies/100 ml and carrying forward the daily maximum limit of 949 colonies/100 ml given the acute dilution associated with the discharge results in an in-stream bacteria count of <236 colonies/100 ml.

A review of the monthly Discharge Monitoring Report (DMR) data for the period May 2007 – September 2009 indicates the permittee has been in compliance with said limit(s) as values have been reported as follows:

***E. coli* bacteria (DMRs=14)**

Value	Limit (col/100 ml)	Range (col/100 ml)	Mean (col/100 ml)
Monthly Average	142	1 – 11	3
Daily Maximum	949	1 - 111	24

- f. Total Residual Chlorine (TRC): The previous permitting action established a daily maximum technology-based concentration limit of 1.0 mg/L for TRC and a minimum monitoring frequency requirement of five times per week. Limitations on TRC are specified to ensure that ambient water quality standards are maintained and that BPT technology is being applied to the discharge. Department licensing/permitting actions impose the more stringent of either a water quality-based or BPT based limit. End-of-pipe acute and chronic water quality based concentration thresholds may be calculated as follows:

Acute (A) Criterion	Chronic (C) Criterion	Modified A & C Dilution Factors	Calculated	
			Acute Threshold	Chronic Threshold
0.019 mg/L	0.011 mg/L	14,154:1 (Mod. A) 56,578:1 (C)	269 mg/L	622 mg/L

The Department has established a daily maximum BPT limitation of 1.0 mg/L for facilities that disinfect their effluent with elemental chlorine or chlorine-based compounds. The BPT-based limit of 1.0 mg/L is more stringent than the calculated acute water quality-based threshold of 269 mg/L and is therefore being carried forward in this permitting action. The monitoring frequency requirement of 5/Week is being reduced to 2/Week given the excellent compliance history over the five-year term of the 9/21/05 permitting action.

6. EFFLUENT LIMITATIONS & MONITORING REQUIREMENTS (cont'd)

TRC monitoring must be performed during any period in which chlorine-based compounds are in for effluent disinfection. For instances when chlorine based compounds are not used for disinfection during an entire reporting period, the facility shall report “**NODI-9**” for this parameter on the monthly Discharge Monitoring Report (DMR).

A review of the monthly Discharge Monitoring Report (DMR) data for the period May 2007 – September 2009 indicates the permittee has been in compliance with said limit(s) as values have been reported as follows:

Total residual chlorine (DMRs=18)

Value	Limit (mg/L)	Range (mg/L)	Mean (mg/L)
Daily Maximum	1.0	0.26 – 0.98	0.67

- g. Total Phosphorus (Total-P) and Orthophosphate (Ortho-P): The previous permitting action established phosphorus monitoring requirements in order to assist the Department in evaluating water quality impacts caused by municipal dischargers on the upper portion of the Androscoggin River. The permit established monthly average concentration and mass reporting requirements for total phosphorus (total-P) and orthophosphate (ortho-P) during the warm season (June 1 – September 30) of calendar year 2006 only, and a minimum monitoring frequency requirement of once per month (1/Month). Following completion of calendar year 2006 effluent monitoring for phosphorus, the Department will evaluate the data and determine if numeric effluent limits or additional monitoring is required to protect receiving water quality.

A review of the monthly Discharge Monitoring Report (DMR) data for the period June 1, 2006 – September 30, 2006 indicates the permittee has been in compliance with said limit(s) as values have been reported as follows:

Concentration

Total phosphorus (DMRs=4)

Value	Limit (mg/L)	Range (mg/L)	Mean (mg/L)
Monthly average	Report	4.5 – 9.0	6.2

Ortho phosphate (DMRs=4)

Value	Limit (mg/L)	Range (mg/L)	Mean (mg/L)
Monthly average	Report	4.5 – 8.6	8

6. EFFLUENT LIMITATIONS & MONITORING REQUIREMENTS (cont'd)**Mass****Total phosphorus (DMRs=4)**

Value	Limit (lbs/day)	Range (lbs/day)	Mean (lbs/day)
Monthly average	Report	0.01 – 0.03	0.02

Ortho phosphate (DMRs=4)

Value	Limit (lbs/day)	Range (lbs/day)	Mean (lbs/day)
Monthly average	Report	0.01 – 0.03	0.02

The Department has made the determination that the discharge of total phosphorus and ortho phosphate from the Rumford Point facility are insignificant compared to other dischargers on the river and are not causing or contributing to impairments cited in Section 5, *Receiving Water Conditions*, of this Fact Sheet. Therefore, this permitting action is eliminating the total phosphorus and ortho-phosphate monitoring requirements in this permit action.

- h. **pH:** The previous permitting action established a pH range limitation of 6.0 – 9.0 standard units based on Department rule found at Chapter 525(3)(III)(c), which is being carried forward in this permitting action. The monitoring frequency requirement of 5/Week is being reduced to 2/Week given the excellent compliance history over the five-year term of the 9/21/05 permitting action.

A review of the monthly Discharge Monitoring Report (DMR) data for the period January 2007 – February 2010 indicates the permittee has been in compliance with said limit(s) 100% of the time.

- i. **Whole Effluent Toxicity (WET) and Chemical Specific Testing** – The previous permitting action did not contain any WET or chemical specific testing requirements as the Rumford Point facility was exempt from said testing pursuant the former Department rule Chapter 530.5. Maine law, 38 M.R.S.A., Sections 414-A and 420, prohibit the discharge of effluents containing substances in amounts that would cause the surface waters of the State to contain toxic substances above levels set forth in Federal Water Quality Criteria as established by the USEPA. Department Rules, 06-096 CMR Chapter 530, *Surface Water Toxics Control Program*, and Chapter 584, *Surface Water Quality Criteria for Toxic Pollutants* set forth ambient water quality criteria (AWQC) for toxic pollutants and procedures necessary to control levels of toxic pollutants in surface waters. WET, priority pollutant and analytical chemistry testing as required by Chapter 530, is included in this permit in order to fully characterize the effluent. This permit also provides for reconsideration of effluent limits and monitoring schedules after evaluation of toxicity testing results. The monitoring schedule includes consideration of results currently on file, the nature of the wastewater, existing treatment and receiving water characteristics.

6. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS (cont'd)

WET monitoring is required to assess and protect against impacts upon water quality and designated uses caused by the aggregate effect of the discharge on specific aquatic organisms. Acute and chronic WET tests are performed on invertebrate and vertebrate species. Priority pollutant and analytical chemistry testing is required to assess the levels of individual toxic pollutants in the discharge, comparing each pollutant to acute, chronic, and human health AWQC as established in Chapter 584.

Chapter 530 establishes four categories of testing requirements based predominately on the chronic dilution factor. The categories are as follows:

- 1) Level I – chronic dilution factor of $<20:1$.
- 2) Level II – chronic dilution factor of $\geq 20:1$ but $<100:1$.
- 3) Level III – chronic dilution factor $\geq 100:1$ but $<500:1$ or $>500:1$ and $Q \geq 1.0$ MGD
- 4) Level IV – chronic dilution $>500:1$ and $Q < 1.0$ MGD

Department rule Chapter 530 (1)(D) specifies the criteria to be used in determining the minimum monitoring frequency requirements for WET, priority pollutant and analytical chemistry testing. Based on the Chapter 530 criteria, the permittee's facility falls into the Level IV frequency category as the facility has a chronic dilution factor of $>500:1$ and a $Q < 1.0$ MGD. Chapter 530(1)(D)(1) specifies that default screening and surveillance level testing requirements are as follows:

Screening level testing – Beginning 12 months prior to permit expiration and lasting through permit expiration and every five years thereafter.

Level	WET Testing	Priority pollutant testing	Analytical chemistry
IV	1 per year	1 per year	4 per year

Surveillance level testing – Beginning upon issuance of the permit and lasting through 12 months prior to permit expiration.

Level	WET Testing	Priority pollutant testing	Analytical chemistry
IV	1 per year	None required	1 per year

6. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS (cont'd)

The routine testing requirements for Level IV are waived pursuant to Chapter 530, except that the Department shall require an individual discharger to conduct testing under the following conditions.

- (a) The discharger's permit application or information available to the Department indicate that toxic compounds may be present in toxic amounts; or
- (b) Previous testing conducted by the discharger or similar dischargers indicates that toxic compounds may be present in toxic amounts.

The Department has no information on file that warrants establishing WET, priority pollutant or analytical chemistry testing.

In accordance with Department rule Chapter 530(2)(D)(4) and Special Condition K of this permit, *Chapter 530(2)(D)(4) Certification*, for permittee's waived from Chapter 530 testing requirements must annually submit a written statement to the Department evaluating its current status for each of the four conditions listed. See **Attachment C** of the Fact Sheet of this permit for an acceptable certification form to satisfy this Special Condition.

- j. Mercury: Pursuant to *Certain deposits and discharges prohibited*, Maine law, 38 M.R.S.A. §420 and *Waste Discharge Licenses*, 38 M.R.S.A. § 413 and *Interim Effluent Limitations and Controls for the Discharge of Mercury*, 06-096 CMR 519 (last amended October 6, 2001), the Department issued a Notice of Interim Limits for the Discharge of Mercury to the permittee on May 23, 2000, thereby administratively modifying MEPDES ME0101485/WDL W002685-5L-F-R by establishing interim average and daily maximum effluent concentration limits of 4.5 parts per trillion (ppt) and 6.8 ppt, respectively, and a minimum monitoring frequency requirement of two (2) tests per year for mercury. It is noted the limitations have not been incorporated into Special Condition A, *Effluent Limitations And Monitoring Requirements*, of this permit as limitations and monitoring frequencies are regulated separately through 38 M.R.S.A. § 413 and 06-096 CMR 519 and Special Condition H, *Mercury*, of this permit. The interim limitations remain in effect and enforceable and any modifications to the limits and or monitoring requirements will be formalized outside of this permitting document.

Maine law 38 M.R.S.A., §420 1-B,(B)(1) states that a facility is not in violation of the AWQC for mercury if the facility is in compliance with an interim discharge limit established by the Department pursuant to section 413, subsection 11. A review of the Department's database for the previous 60-month period indicates mercury test results reported have ranged from 0.5 ppt to 7.8 ppt with an arithmetic mean (n=12) of 4.6 ppt.

7. DISCHARGE IMPACT ON RECEIVING WATER QUALITY

As permitted, the Department has determined the existing water uses will be maintained and protected and the discharge will not cause or contribute to the failure of the waterbody to meet standards for Class C classification.

8. PUBLIC COMMENTS

Public notice of this application was made in the Rumford Falls Times newspaper on or about May 26, 2010. The Department receives public comments on an application until the date a final agency action is taken on the application. Those persons receiving copies of draft permits shall have at least 30 days in which to submit comments on the draft or to request a public hearing, pursuant to Chapter 522 of the Department's rules.

9. DEPARTMENT CONTACTS

Additional information concerning this permitting action may be obtained from and written comments should be sent to:

Gregg Wood
Division of Water Quality Management
Bureau of Land & Water Quality
Department of Environmental Protection
17 State House Station
Augusta, Maine 04333-0017 Telephone: (207) 287-7693
e-mail: gregg.woo@maine.gov

10. RESPONSE TO COMMENTS

During the period of June 8, 2010, through the issuance date of the permit/license, the Department solicited comments on the proposed draft permit/license to be issued for the discharge(s) from the Rumford Point facility. The Department received comments from the permittee in an electronic mail message dated July 1, 2010. The Department's responses to the comments that resulted in changes to the final permit are as follows:

Comment #1: The permittee has requested Special Condition G, *Wet Weather Flow Management Plan*, be deleted from the final permit as a review of 10 years of flow data has indicated there has never been an excursion of the flow limit of 19,000 gpd.


Response #1: For this particular facility the Department agrees and therefore, the requirement to maintain a Wet Weather Flow Management Plan for the facility has been removed from the final permit.

10. RESPONSE TO COMMENTS (cont'd)

Comment #2: The permittee has indicated the monitoring frequency of 5/Week for settleable solids, total residual chlorine and pH seems excessive given the flows treated at the facility are routinely less than 2,000 gallons per day.

Response#2: The Department agrees and has reduced the monitoring frequencies for said parameters to 2/Week. If future compliance data indicates a statistically significant trend approaching non-compliance with said parameters, the Department will consider re-opening the permit pursuant Special Condition K, *Reopening of Permit For Modifications*, to establish more frequent monitoring requirements.


ATTACHMENT A

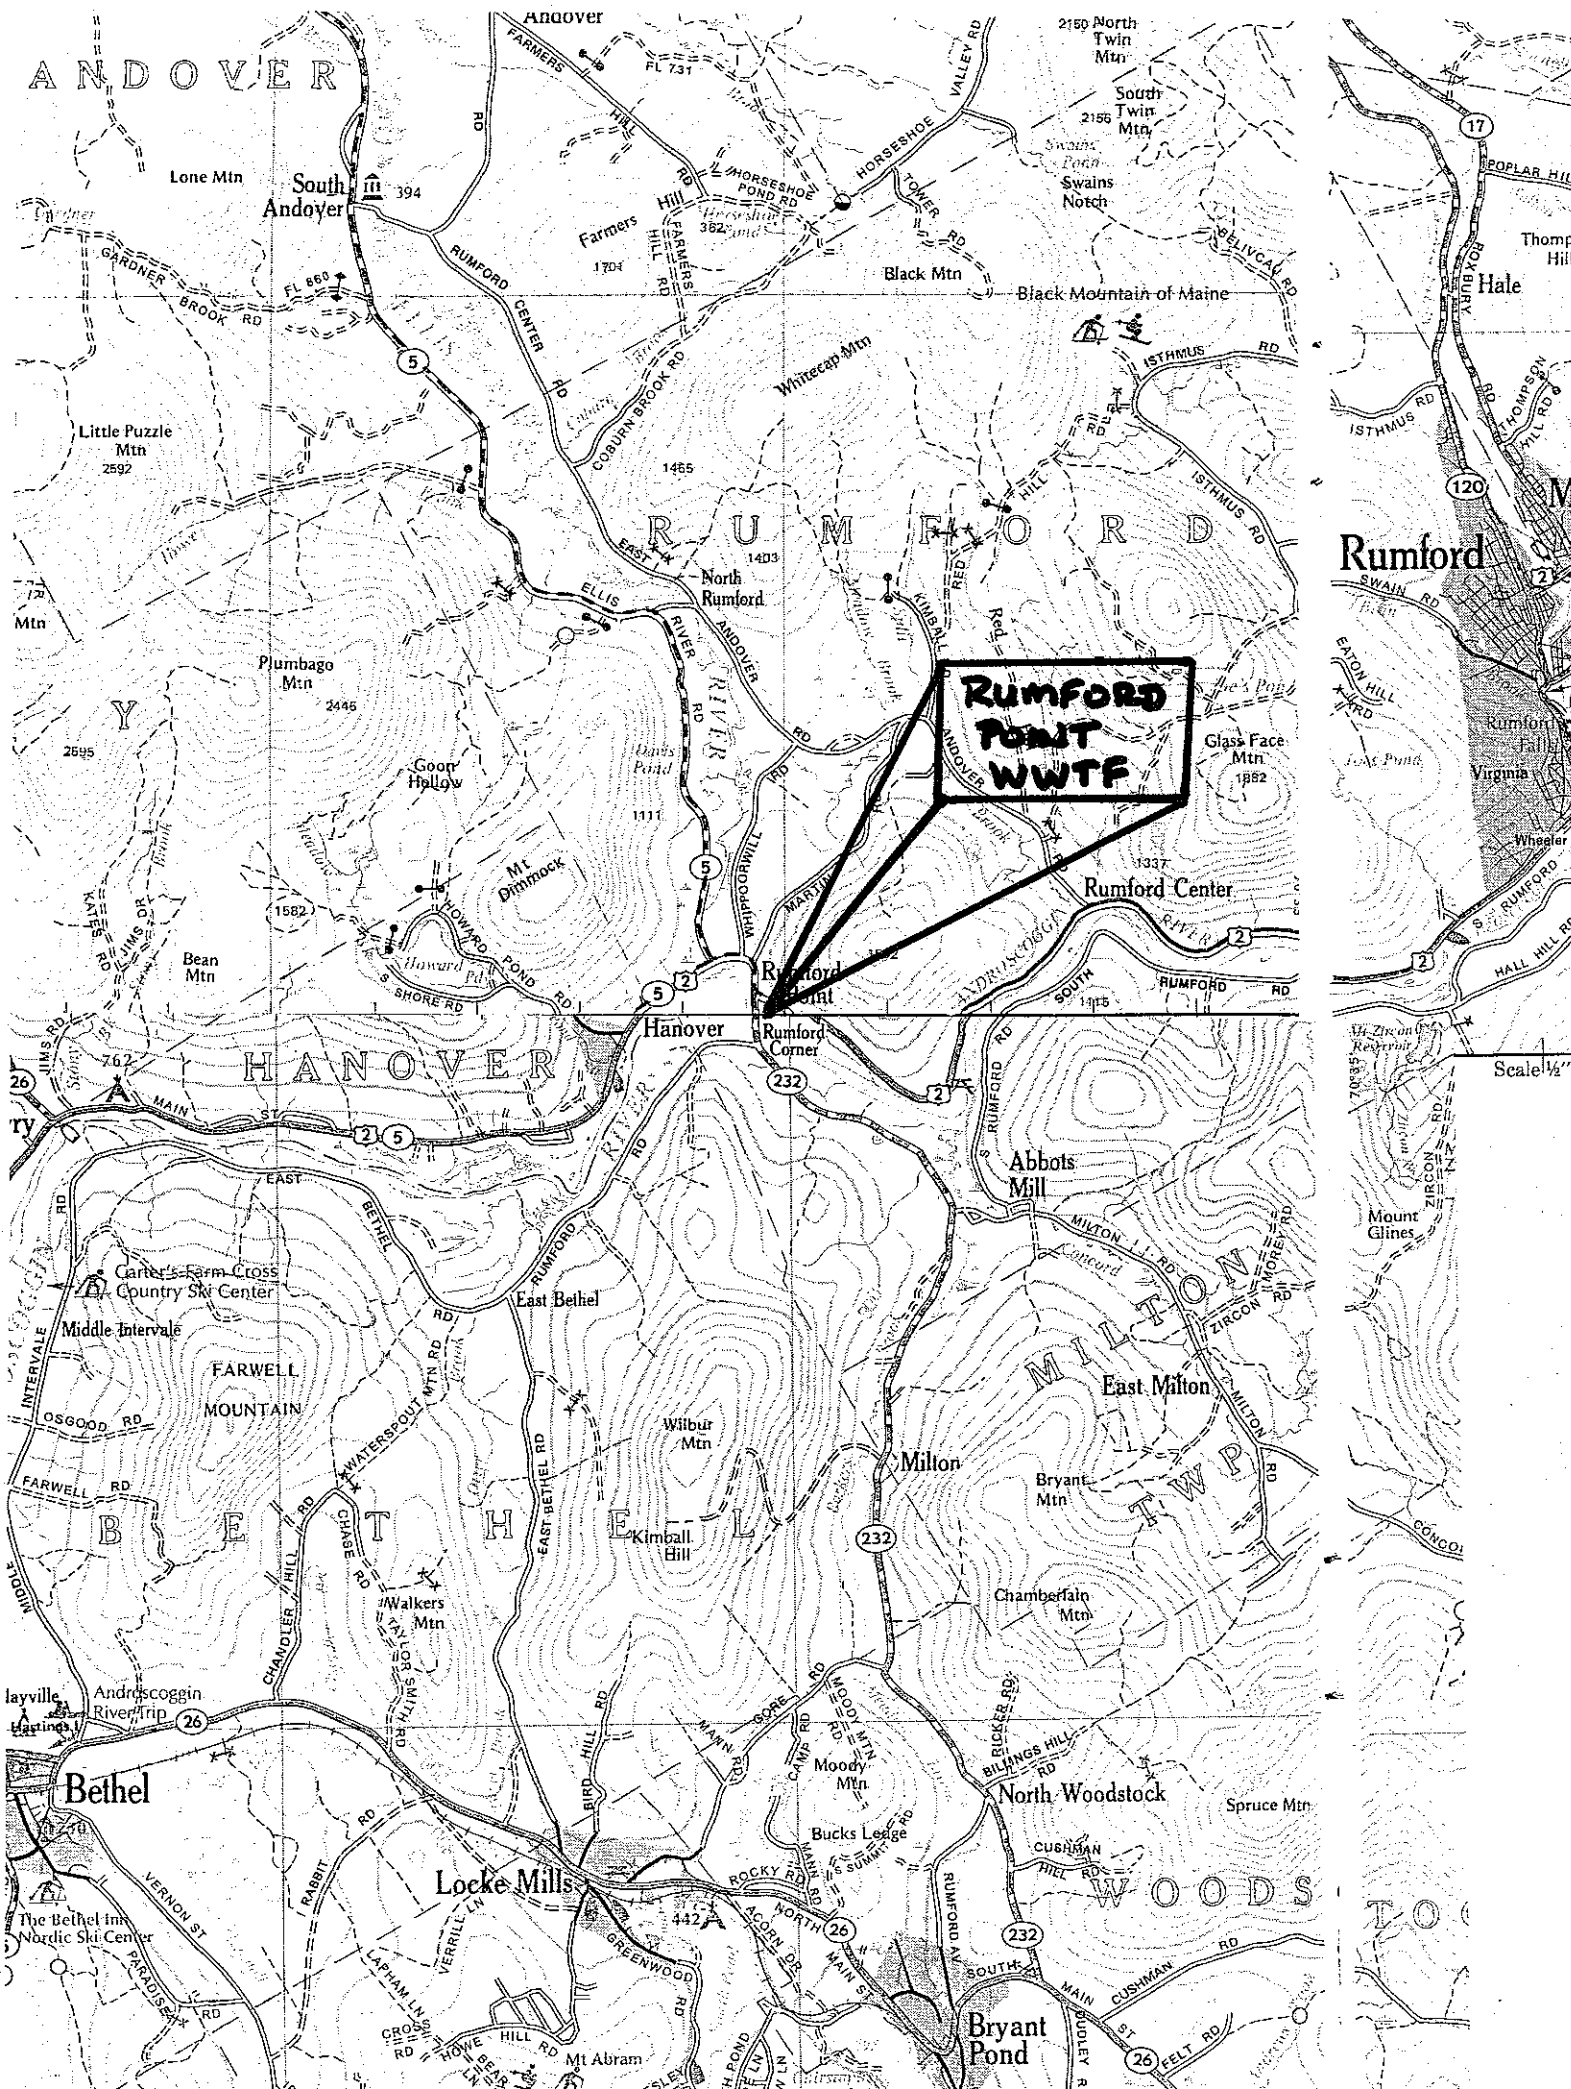

ATTACHMENT B

Runford Point Line Drawing

Item 2 A)

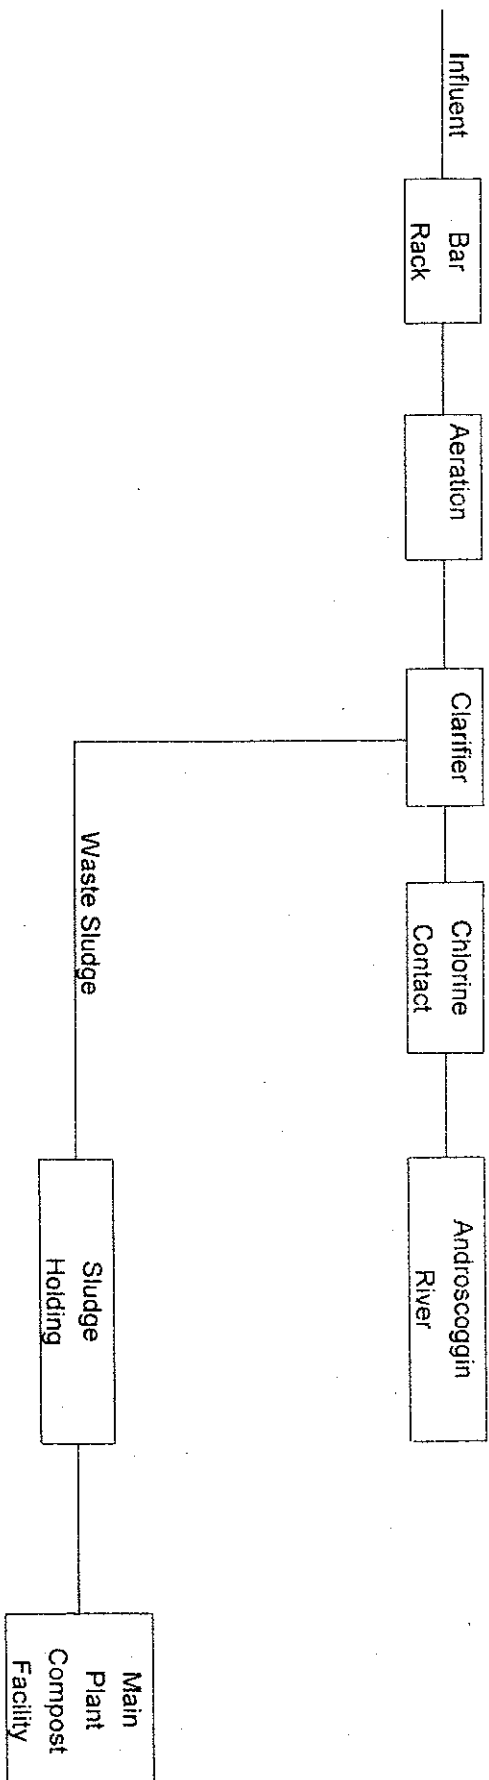

ATTACHMENT C

CHAPTER 530(2)(D)(4) CERTIFICATION

MEPDES# _____ Facility Name _____

Since the effective date of your permit have there been:	NO	YES (Describe in Comments)
1. changes in the number or types of non-domestic wastes contributed directly or indirectly to the wastewater treatment works that may increase the toxicity of the discharge?		
2. changes in the operation of the treatment works that may increase the toxicity of the discharge?		
3. changes in industrial manufacturing processes contributing wastewater to the treatment works that may increase the toxicity of the discharge?		

COMMENTS:

Name(print) _____

Signature _____ Date _____

This document must be signed by the permittee or their legal representative.

This form may be used to meet the requirements of Chap 530(2)(D)(4). This Chapter requires all dischargers having waived or reduced Toxic testing to file a statement with the Department describing changes to the waste being contributed to their system as outlined above. As an alternative the discharger may submit a signed letter containing the same information.

MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

CONTENTS

SECTION	TOPIC	PAGE
A	GENERAL PROVISIONS	
1	General compliance	2
2	Other materials	2
3	Duty to Comply	2
4	Duty to provide information	2
5	Permit actions	2
6	Reopener clause	2
7	Oil and hazardous substances	2
8	Property rights	3
9	Confidentiality	3
10	Duty to reapply	3
11	Other laws	3
12	Inspection and entry	3
B	OPERATION AND MAINTENANCE OF FACILITIES	
1	General facility requirements	3
2	Proper operation and maintenance	4
3	Need to halt reduce not a defense	4
4	Duty to mitigate	4
5	Bypasses	4
6	Upsets	5
C	MONITORING AND RECORDS	
1	General requirements	6
2	Representative sampling	6
3	Monitoring and records	6
D	REPORTING REQUIREMENTS	
1	Reporting requirements	7
2	Signatory requirement	8
3	Availability of reports	8
4	Existing manufacturing, commercial, mining, and silvicultural dischargers	8
5	Publicly owned treatment works	9
E	OTHER PROVISIONS	
1	Emergency action - power failure	9
2	Spill prevention	10
3	Removed substances	10
4	Connection to municipal sewer	10
F	DEFINITIONS	10

MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

A. GENERAL PROVISIONS

1. **General compliance.** All discharges shall be consistent with the terms and conditions of this permit; any changes in production capacity or process modifications which result in changes in the quantity or the characteristics of the discharge must be authorized by an additional license or by modifications of this permit; it shall be a violation of the terms and conditions of this permit to discharge any pollutant not identified and authorized herein or to discharge in excess of the rates or quantities authorized herein or to violate any other conditions of this permit.

2. **Other materials.** Other materials ordinarily produced or used in the operation of this facility, which have been specifically identified in the application, may be discharged at the maximum frequency and maximum level identified in the application, provided:

- (a) They are not
 - (i) Designated as toxic or hazardous under the provisions of Sections 307 and 311, respectively, of the Federal Water Pollution Control Act; Title 38, Section 420, Maine Revised Statutes; or other applicable State Law; or
 - (ii) Known to be hazardous or toxic by the licensee.
- (b) The discharge of such materials will not violate applicable water quality standards.

3. **Duty to comply.** The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of State law and the Clean Water Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or denial of a permit renewal application.

- (a) The permittee shall comply with effluent standards or prohibitions established under section 307(a) of the Clean Water Act, and 38 MRSA, §420 or Chapter 530.5 for toxic pollutants within the time provided in the regulations that establish these standards or prohibitions, even if the permit has not yet been modified to incorporate the requirement.
- (b) Any person who violates any provision of the laws administered by the Department, including without limitation, a violation of the terms of any order, rule license, permit, approval or decision of the Board or Commissioner is subject to the penalties set forth in 38 MRSA, §349.

4. **Duty to provide information.** The permittee shall furnish to the Department, within a reasonable time, any information which the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit or to determine compliance with this permit. The permittee shall also furnish to the Department upon request, copies of records required to be kept by this permit.

5. **Permit actions.** This permit may be modified, revoked and reissued, or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any permit condition.

6. **Reopener clause.** The Department reserves the right to make appropriate revisions to this permit in order to establish any appropriate effluent limitations, schedule of compliance or other provisions which may be authorized under 38 MRSA, §414-A(5).

MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

7. Oil and hazardous substances. Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities or penalties to which the permittee is or may be subject under section 311 of the Federal Clean Water Act; section 106 of the Federal Comprehensive Environmental Response, Compensation and Liability Act of 1980; or 38 MRSA §§ 1301, et. seq.

8. Property rights. This permit does not convey any property rights of any sort, or any exclusive privilege.

9. Confidentiality of records. 38 MRSA §414(6) reads as follows. "Any records, reports or information obtained under this subchapter is available to the public, except that upon a showing satisfactory to the department by any person that any records, reports or information, or particular part or any record, report or information, other than the names and addresses of applicants, license applications, licenses, and effluent data, to which the department has access under this subchapter would, if made public, divulge methods or processes that are entitled to protection as trade secrets, these records, reports or information must be confidential and not available for public inspection or examination. Any records, reports or information may be disclosed to employees or authorized representatives of the State or the United States concerned with carrying out this subchapter or any applicable federal law, and to any party to a hearing held under this section on terms the commissioner may prescribe in order to protect these confidential records, reports and information, as long as this disclosure is material and relevant to any issue under consideration by the department."

10. Duty to reapply. If the permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, the permittee must apply for and obtain a new permit.

11. Other laws. The issuance of this permit does not authorize any injury to persons or property or invasion of other property rights, nor does it relieve the permittee of its obligation to comply with other applicable Federal, State or local laws and regulations.

12. Inspection and entry. The permittee shall allow the Department, or an authorized representative (including an authorized contractor acting as a representative of the EPA Administrator), upon presentation of credentials and other documents as may be required by law, to:

- (a) Enter upon the permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this permit;
- (b) Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;
- (c) Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and
- (d) Sample or monitor at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the Clean Water Act, any substances or parameters at any location.

B. OPERATION AND MAINTENANCE OF FACILITIES

1. General facility requirements.

- (a) The permittee shall collect all waste flows designated by the Department as requiring treatment and discharge them into an approved waste treatment facility in such a manner as to

MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

maximize removal of pollutants unless authorization to the contrary is obtained from the Department.

- (b) The permittee shall at all times maintain in good working order and operate at maximum efficiency all waste water collection, treatment and/or control facilities.
- (c) All necessary waste treatment facilities will be installed and operational prior to the discharge of any wastewaters.
- (d) Final plans and specifications must be submitted to the Department for review prior to the construction or modification of any treatment facilities.
- (e) The permittee shall install flow measuring facilities of a design approved by the Department.
- (f) The permittee must provide an outfall of a design approved by the Department which is placed in the receiving waters in such a manner that the maximum mixing and dispersion of the wastewaters will be achieved as rapidly as possible.

2. Proper operation and maintenance. The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems which are installed by a permittee only when the operation is necessary to achieve compliance with the conditions of the permit.

3. Need to halt or reduce activity not a defense. It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

4. Duty to mitigate. The permittee shall take all reasonable steps to minimize or prevent any discharge or sludge use or disposal in violation of this permit which has a reasonable likelihood of adversely affecting human health or the environment.

5. Bypasses.

(a) Definitions.

- (i) Bypass means the intentional diversion of waste streams from any portion of a treatment facility.
- (ii) Severe property damage means substantial physical damage to property, damage to the treatment facilities which causes them to become inoperable, or substantial and permanent loss of natural resources which can reasonably be expected to occur in the absence of a bypass. Severe property damage does not mean economic loss caused by delays in production.

(b) Bypass not exceeding limitations. The permittee may allow any bypass to occur which does not cause effluent limitations to be exceeded, but only if it also is for essential maintenance to assure efficient operation. These bypasses are not subject to the provisions of paragraphs (c) and (d) of this section.

(c) Notice.

- (i) Anticipated bypass. If the permittee knows in advance of the need for a bypass, it shall submit prior notice, if possible at least ten days before the date of the bypass.

MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

- (ii) Unanticipated bypass. The permittee shall submit notice of an unanticipated bypass as required in paragraph D(1)(f), below. (24-hour notice).
- (d) Prohibition of bypass.
 - (i) Bypass is prohibited, and the Department may take enforcement action against a permittee for bypass, unless:
 - (A) Bypass was unavoidable to prevent loss of life, personal injury, or severe property damage;
 - (B) There were no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if adequate back-up equipment should have been installed in the exercise of reasonable engineering judgment to prevent a bypass which occurred during normal periods of equipment downtime or preventive maintenance; and
 - (C) The permittee submitted notices as required under paragraph (c) of this section.
 - (ii) The Department may approve an anticipated bypass, after considering its adverse effects, if the Department determines that it will meet the three conditions listed above in paragraph (d)(i) of this section.

6. Upsets.

- (a) Definition. Upset means an exceptional incident in which there is unintentional and temporary noncompliance with technology based permit effluent limitations because of factors beyond the reasonable control of the permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation.
- (b) Effect of an upset. An upset constitutes an affirmative defense to an action brought for noncompliance with such technology based permit effluent limitations if the requirements of paragraph (c) of this section are met. No determination made during administrative review of claims that noncompliance was caused by upset, and before an action for noncompliance, is final administrative action subject to judicial review.
- (c) Conditions necessary for a demonstration of upset. A permittee who wishes to establish the affirmative defense of upset shall demonstrate, through properly signed, contemporaneous operating logs, or other relevant evidence that:
 - (i) An upset occurred and that the permittee can identify the cause(s) of the upset;
 - (ii) The permitted facility was at the time being properly operated; and
 - (iii) The permittee submitted notice of the upset as required in paragraph D(1)(f), below. (24 hour notice).
 - (iv) The permittee complied with any remedial measures required under paragraph B(4).
- (d) Burden of proof. In any enforcement proceeding the permittee seeking to establish the occurrence of an upset has the burden of proof.

MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

C. MONITORING AND RECORDS

1. General Requirements. This permit shall be subject to such monitoring requirements as may be reasonably required by the Department including the installation, use and maintenance of monitoring equipment or methods (including, where appropriate, biological monitoring methods). The permittee shall provide the Department with periodic reports on the proper Department reporting form of monitoring results obtained pursuant to the monitoring requirements contained herein.

2. Representative sampling. Samples and measurements taken as required herein shall be representative of the volume and nature of the monitored discharge. If effluent limitations are based wholly or partially on quantities of a product processed, the permittee shall ensure samples are representative of times when production is taking place. Where discharge monitoring is required when production is less than 50%, the resulting data shall be reported as a daily measurement but not included in computation of averages, unless specifically authorized by the Department.

3. Monitoring and records.

- (a) Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity.
- (b) Except for records of monitoring information required by this permit related to the permittee's sewage sludge use and disposal activities, which shall be retained for a period of at least five years, the permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit, for a period of at least 3 years from the date of the sample, measurement, report or application. This period may be extended by request of the Department at any time.
- (c) Records of monitoring information shall include:
 - (i) The date, exact place, and time of sampling or measurements;
 - (ii) The individual(s) who performed the sampling or measurements;
 - (iii) The date(s) analyses were performed;
 - (iv) The individual(s) who performed the analyses;
 - (v) The analytical techniques or methods used; and
 - (vi) The results of such analyses.
- (d) Monitoring results must be conducted according to test procedures approved under 40 CFR part 136, unless other test procedures have been specified in the permit.
- (e) State law provides that any person who tampers with or renders inaccurate any monitoring devices or method required by any provision of law, or any order, rule license, permit approval or decision is subject to the penalties set forth in 38 MRSA, §349.

MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

D. REPORTING REQUIREMENTS

1. Reporting requirements.

- (a) Planned changes. The permittee shall give notice to the Department as soon as possible of any planned physical alterations or additions to the permitted facility. Notice is required only when:
 - (i) The alteration or addition to a permitted facility may meet one of the criteria for determining whether a facility is a new source in 40 CFR 122.29(b); or
 - (ii) The alteration or addition could significantly change the nature or increase the quantity of pollutants discharged. This notification applies to pollutants which are subject neither to effluent limitations in the permit, nor to notification requirements under Section D(4).
 - (iii) The alteration or addition results in a significant change in the permittee's sludge use or disposal practices, and such alteration, addition, or change may justify the application of permit conditions that are different from or absent in the existing permit, including notification of additional use or disposal sites not reported during the permit application process or not reported pursuant to an approved land application plan;
- (b) Anticipated noncompliance. The permittee shall give advance notice to the Department of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements.
- (c) Transfers. This permit is not transferable to any person except upon application to and approval of the Department pursuant to 38 MRSA, § 344 and Chapters 2 and 522.
- (d) Monitoring reports. Monitoring results shall be reported at the intervals specified elsewhere in this permit.
 - (i) Monitoring results must be reported on a Discharge Monitoring Report (DMR) or forms provided or specified by the Department for reporting results of monitoring of sludge use or disposal practices.
 - (ii) If the permittee monitors any pollutant more frequently than required by the permit using test procedures approved under 40 CFR part 136 or as specified in the permit, the results of this monitoring shall be included in the calculation and reporting of the data submitted in the DMR or sludge reporting form specified by the Department.
 - (iii) Calculations for all limitations which require averaging of measurements shall utilize an arithmetic mean unless otherwise specified by the Department in the permit.
- (e) Compliance schedules. Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this permit shall be submitted no later than 14 days following each schedule date.
- (f) Twenty-four hour reporting.
 - (i) The permittee shall report any noncompliance which may endanger health or the environment. Any information shall be provided orally within 24 hours from the time the permittee becomes aware of the circumstances. A written submission shall also be provided within 5 days of the time the permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times, and if the noncompliance

MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance.

- (ii) The following shall be included as information which must be reported within 24 hours under this paragraph.

- (A) Any unanticipated bypass which exceeds any effluent limitation in the permit.

- (B) Any upset which exceeds any effluent limitation in the permit.

- (C) Violation of a maximum daily discharge limitation for any of the pollutants listed by the Department in the permit to be reported within 24 hours.

- (iii) The Department may waive the written report on a case-by-case basis for reports under paragraph (f)(ii) of this section if the oral report has been received within 24 hours.

- (g) Other noncompliance. The permittee shall report all instances of noncompliance not reported under paragraphs (d), (e), and (f) of this section, at the time monitoring reports are submitted. The reports shall contain the information listed in paragraph (f) of this section.

- (h) Other information. Where the permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to the Department, it shall promptly submit such facts or information.

2. Signatory requirement. All applications, reports, or information submitted to the Department shall be signed and certified as required by Chapter 521, Section 5 of the Department's rules. State law provides that any person who knowingly makes any false statement, representation or certification in any application, record, report, plan or other document filed or required to be maintained by any order, rule, permit, approval or decision of the Board or Commissioner is subject to the penalties set forth in 38 MRSA, §349.

3. Availability of reports. Except for data determined to be confidential under A(9), above, all reports prepared in accordance with the terms of this permit shall be available for public inspection at the offices of the Department. As required by State law, effluent data shall not be considered confidential. Knowingly making any false statement on any such report may result in the imposition of criminal sanctions as provided by law.

4. Existing manufacturing, commercial, mining, and silvicultural dischargers. In addition to the reporting requirements under this Section, all existing manufacturing, commercial, mining, and silvicultural dischargers must notify the Department as soon as they know or have reason to believe:

- (a) That any activity has occurred or will occur which would result in the discharge, on a routine or frequent basis, of any toxic pollutant which is not limited in the permit, if that discharge will exceed the highest of the following "notification levels":

- (i) One hundred micrograms per liter (100 ug/l);

- (ii) Two hundred micrograms per liter (200 ug/l) for acrolein and acrylonitrile; five hundred micrograms per liter (500 ug/l) for 2,4-dinitrophenol and for 2-methyl-4,6-dinitrophenol; and one milligram per liter (1 mg/l) for antimony;

- (iii) Five (5) times the maximum concentration value reported for that pollutant in the permit application in accordance with Chapter 521 Section 4(g)(7); or

- (iv) The level established by the Department in accordance with Chapter 523 Section 5(f).

MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

- (b) That any activity has occurred or will occur which would result in any discharge, on a non-routine or infrequent basis, of a toxic pollutant which is not limited in the permit, if that discharge will exceed the highest of the following "notification levels":
 - (i) Five hundred micrograms per liter (500 ug/l);
 - (ii) One milligram per liter (1 mg/l) for antimony;
 - (iii) Ten (10) times the maximum concentration value reported for that pollutant in the permit application in accordance with Chapter 521 Section 4(g)(7); or
 - (iv) The level established by the Department in accordance with Chapter 523 Section 5(f).

5. Publicly owned treatment works.

- (a) All POTWs must provide adequate notice to the Department of the following:
 - (i) Any new introduction of pollutants into the POTW from an indirect discharger which would be subject to section 301 or 306 of CWA or Chapter 528 if it were directly discharging those pollutants.
 - (ii) Any substantial change in the volume or character of pollutants being introduced into that POTW by a source introducing pollutants into the POTW at the time of issuance of the permit.
 - (iii) For purposes of this paragraph, adequate notice shall include information on (A) the quality and quantity of effluent introduced into the POTW, and (B) any anticipated impact of the change on the quantity or quality of effluent to be discharged from the POTW.
- (b) When the effluent discharged by a POTW for a period of three consecutive months exceeds 80 percent of the permitted flow, the permittee shall submit to the Department a projection of loadings up to the time when the design capacity of the treatment facility will be reached, and a program for maintaining satisfactory treatment levels consistent with approved water quality management plans.

E. OTHER REQUIREMENTS

1. Emergency action - power failure. Within thirty days after the effective date of this permit, the permittee shall notify the Department of facilities and plans to be used in the event the primary source of power to its wastewater pumping and treatment facilities fails as follows.

- (a) For municipal sources. During power failure, all wastewaters which are normally treated shall receive a minimum of primary treatment and disinfection. Unless otherwise approved, alternate power supplies shall be provided for pumping stations and treatment facilities. Alternate power supplies shall be on-site generating units or an outside power source which is separate and independent from sources used for normal operation of the wastewater facilities.
- (b) For industrial and commercial sources. The permittee shall either maintain an alternative power source sufficient to operate the wastewater pumping and treatment facilities or halt, reduce or otherwise control production and or all discharges upon reduction or loss of power to the wastewater pumping or treatment facilities.

MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

2. Spill prevention. (applicable only to industrial sources) Within six months of the effective date of this permit, the permittee shall submit to the Department for review and approval, with or without conditions, a spill prevention plan. The plan shall delineate methods and measures to be taken to prevent and or contain any spills of pulp, chemicals, oils or other contaminants and shall specify means of disposal and or treatment to be used.

3. Removed substances. Solids, sludges trash rack cleanings, filter backwash, or other pollutants removed from or resulting from the treatment or control of waste waters shall be disposed of in a manner approved by the Department.

4. Connection to municipal sewer. (applicable only to industrial and commercial sources) All wastewaters designated by the Department as treatable in a municipal treatment system will be cosigned to that system when it is available. This permit will expire 90 days after the municipal treatment facility becomes available, unless this time is extended by the Department in writing.

F. DEFINITIONS. For the purposes of this permit, the following definitions shall apply. Other definitions applicable to this permit may be found in Chapters 520 through 529 of the Department's rules

Average means the arithmetic mean of values taken at the frequency required for each parameter over the specified period. For bacteria, the average shall be the geometric mean.

Average monthly discharge limitation means the highest allowable average of daily discharges over a calendar month, calculated as the sum of all daily discharges measured during a calendar month divided by the number of daily discharges measured during that month. Except, however, bacteriological tests may be calculated as a geometric mean.

Average weekly discharge limitation means the highest allowable average of daily discharges over a calendar week, calculated as the sum of all daily discharges measured during a calendar week divided by the number of daily discharges measured during that week.

Best management practices ("BMPs") means schedules of activities, prohibitions of practices, maintenance procedures, and other management practices to prevent or reduce the pollution of waters of the State. BMPs also include treatment requirements, operating procedures, and practices to control plant site runoff, spillage or leaks, sludge or waste disposal, or drainage from raw material storage.

Composite sample means a sample consisting of a minimum of eight grab samples collected at equal intervals during a 24 hour period (or a lesser period as specified in the section on monitoring and reporting) and combined proportional to the flow over that same time period.

Continuous discharge means a discharge which occurs without interruption throughout the operating hours of the facility, except for infrequent shutdowns for maintenance, process changes, or other similar activities.

Daily discharge means the discharge of a pollutant measured during a calendar day or any 24-hour period that reasonably represents the calendar day for purposes of sampling. For pollutants with limitations expressed in units of mass, the daily discharge is calculated as the total mass of the pollutant discharged over the day. For pollutants with limitations expressed in other units of measurement, the daily discharge is calculated as the average measurement of the pollutant over the day.

MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

Discharge Monitoring Report ("DMR") means the EPA uniform national form, including any subsequent additions, revisions, or modifications for the reporting of self-monitoring results by permittees. DMRs must be used by approved States as well as by EPA. EPA will supply DMRs to any approved State upon request. The EPA national forms may be modified to substitute the State Agency name, address, logo, and other similar information, as appropriate, in place of EPA's.

Flow weighted composite sample means a composite sample consisting of a mixture of aliquots collected at a constant time interval, where the volume of each aliquot is proportional to the flow rate of the discharge.

Grab sample means an individual sample collected in a period of less than 15 minutes.

Interference means a Discharge which, alone or in conjunction with a discharge or discharges from other sources, both:

- (1) Inhibits or disrupts the POTW, its treatment processes or operations, or its sludge processes, use or disposal; and
- (2) Therefore is a cause of a violation of any requirement of the POTW's NPDES permit (including an increase in the magnitude or duration of a violation) or of the prevention of sewage sludge use or disposal in compliance with the following statutory provisions and regulations or permits issued thereunder (or more stringent State or local regulations): Section 405 of the Clean Water Act, the Solid Waste Disposal Act (SWDA) (including title II, more commonly referred to as the Resource Conservation and Recovery Act (RCRA), and including State regulations contained in any State sludge management plan prepared pursuant to subtitle D of the SWDA), the Clean Air Act, the Toxic Substances Control Act, and the Marine Protection, Research and Sanctuaries Act.

Maximum daily discharge limitation means the highest allowable daily discharge.

New source means any building, structure, facility, or installation from which there is or may be a discharge of pollutants, the construction of which commenced:

- (a) After promulgation of standards of performance under section 306 of CWA which are applicable to such source, or
- (b) After proposal of standards of performance in accordance with section 306 of CWA which are applicable to such source, but only if the standards are promulgated in accordance with section 306 within 120 days of their proposal.

Pass through means a discharge which exits the POTW into waters of the State in quantities or concentrations which, alone or in conjunction with a discharge or discharges from other sources, is a cause of a violation of any requirement of the POTW's NPDES permit (including an increase in the magnitude or duration of a violation).

Permit means an authorization, license, or equivalent control document issued by EPA or an approved State to implement the requirements of 40 CFR parts 122, 123 and 124. Permit includes an NPDES general permit (Chapter 529). Permit does not include any permit which has not yet been the subject of final agency action, such as a draft permit or a proposed permit.

Person means an individual, firm, corporation, municipality, quasi-municipal corporation, state agency, federal agency or other legal entity.

MAINE POLLUTANT DISCHARGE ELIMINATION SYSTEM PERMIT

STANDARD CONDITIONS APPLICABLE TO ALL PERMITS

Point source means any discernible, confined and discrete conveyance, including, but not limited to, any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation or vessel or other floating craft, from which pollutants are or may be discharged.

Pollutant means dredged spoil, solid waste, junk, incinerator residue, sewage, refuse, effluent, garbage, sewage sludge, munitions, chemicals, biological or radiological materials, oil, petroleum products or byproducts, heat, wrecked or discarded equipment, rock, sand, dirt and industrial, municipal, domestic, commercial or agricultural wastes of any kind.

Process wastewater means any water which, during manufacturing or processing, comes into direct contact with or results from the production or use of any raw material, intermediate product, finished product, byproduct, or waste product.

Publicly owned treatment works ("POTW") means any facility for the treatment of pollutants owned by the State or any political subdivision thereof, any municipality, district, quasi-municipal corporation or other public entity.

Septage means, for the purposes of this permit, any waste, refuse, effluent sludge or other material removed from a septic tank, cesspool, vault privy or similar source which concentrates wastes or to which chemicals have been added. Septage does not include wastes from a holding tank.

Time weighted composite means a composite sample consisting of a mixture of equal volume aliquots collected over a constant time interval.

Toxic pollutant includes any pollutant listed as toxic under section 307(a)(1) or, in the case of sludge use or disposal practices, any pollutant identified in regulations implementing section 405(d) of the CWA. Toxic pollutant also includes those substances or combination of substances, including disease causing agents, which after discharge or upon exposure, ingestion, inhalation or assimilation into any organism, including humans either directly through the environment or indirectly through ingestion through food chains, will, on the basis of information available to the board either alone or in combination with other substances already in the receiving waters or the discharge, cause death, disease, abnormalities, cancer, genetic mutations, physiological malfunctions, including malfunctions in reproduction, or physical deformations in such organism or their offspring.

Wetlands means those areas that are inundated or saturated by surface or ground water at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bogs, and similar areas.

Whole effluent toxicity means the aggregate toxic effect of an effluent measured directly by a toxicity test.



DEP INFORMATION SHEET

Appealing a Commissioner's Licensing Decision

Dated: May 2004

Contact: (207) 287-2811

SUMMARY

There are two methods available to an aggrieved person seeking to appeal a licensing decision made by the Department of Environmental Protection's (DEP) Commissioner: (1) in an administrative process before the Board of Environmental Protection (Board); or (2) in a judicial process before Maine's Superior Court. This INFORMATION SHEET, in conjunction with consulting statutory and regulatory provisions referred to herein, can help aggrieved persons with understanding their rights and obligations in filing an administrative or judicial appeal.

I. ADMINISTRATIVE APPEALS TO THE BOARD

LEGAL REFERENCES

DEP's *General Laws*, 38 M.R.S.A. § 341-D(4), and its *Rules Concerning the Processing of Applications and Other Administrative Matters* (Chapter 2), 06-096 CMR 2.24 (April 1, 2003).

HOW LONG YOU HAVE TO SUBMIT AN APPEAL TO THE BOARD

The Board must receive a written notice of appeal within 30 calendar days of the date on which the Commissioner's decision was filed with the Board. Appeals filed after 30 calendar days will be rejected.

HOW TO SUBMIT AN APPEAL TO THE BOARD

Signed original appeal documents must be sent to: Chair, Board of Environmental Protection, c/o Department of Environmental Protection, 17 State House Station, Augusta, ME 04333-0017; faxes are acceptable for purposes of meeting the deadline when followed by receipt of mailed original documents within five (5) working days. Receipt on a particular day must be by 5:00 PM at DEP's offices in Augusta; materials received after 5:00 PM are not considered received until the following day. The person appealing a licensing decision must also send the DEP's Commissioner and the applicant a copy of the documents. All the information listed in the next section must be submitted at the time the appeal is filed. Only the extraordinary circumstances described at the end of that section will justify evidence not in the DEP's record at the time of decision being added to the record for consideration by the Board as part of an appeal.

WHAT YOUR APPEAL PAPERWORK MUST CONTAIN

The materials constituting an appeal must contain the following information at the time submitted:

1. *Aggrieved Status.* Standing to maintain an appeal requires the appellant to show they are particularly injured by the Commissioner's decision.
2. *The findings, conclusions or conditions objected to or believed to be in error.* Specific references and facts regarding the appellant's issues with the decision must be provided in the notice of appeal.
3. *The basis of the objections or challenge.* If possible, specific regulations, statutes or other facts should be referenced. This may include citing omissions of relevant requirements, and errors believed to have been made in interpretations, conclusions, and relevant requirements.
4. *The remedy sought.* This can range from reversal of the Commissioner's decision on the license or permit to changes in specific permit conditions.

5. *All the matters to be contested.* The Board will limit its consideration to those arguments specifically raised in the written notice of appeal.
6. *Request for hearing.* The Board will hear presentations on appeals at its regularly scheduled meetings, unless a public hearing is requested and granted. A request for public hearing on an appeal must be filed as part of the notice of appeal.
7. *New or additional evidence to be offered.* The Board may allow new or additional evidence as part of an appeal only when the person seeking to add information to the record can show due diligence in bringing the evidence to the DEP's attention at the earliest possible time in the licensing process or show that the evidence itself is newly discovered and could not have been presented earlier in the process. Specific requirements for additional evidence are found in Chapter 2, Section 24(B)(5).

OTHER CONSIDERATIONS IN APPEALING A DECISION TO THE BOARD

1. *Be familiar with all relevant material in the DEP record.* A license file is public information made easily accessible by DEP. Upon request, the DEP will make the material available during normal working hours, provide space to review the file, and provide opportunity for photocopying materials. There is a charge for copies or copying services.
2. *Be familiar with the regulations and laws under which the application was processed, and the procedural rules governing your appeal.* DEP staff will provide this information on request and answer questions regarding applicable requirements.
3. *The filing of an appeal does not operate as a stay to any decision.* An applicant proceeding with a project pending the outcome of an appeal runs the risk of the decision being reversed or modified as a result of the appeal.

WHAT TO EXPECT ONCE YOU FILE A TIMELY APPEAL WITH THE BOARD

The Board will formally acknowledge initiation of the appeals procedure, including the name of the DEP project manager assigned to the specific appeal, within 15 days of receiving a timely filing. The notice of appeal, all materials accepted by the Board Chair as additional evidence, and any materials submitted in response to the appeal will be sent to Board members along with a briefing and recommendation from DEP staff. Parties filing appeals and interested persons are notified in advance of the final date set for Board consideration of an appeal or request for public hearing. With or without holding a public hearing, the Board may affirm, amend, or reverse a Commissioner decision. The Board will notify parties to an appeal and interested persons of its decision.

II. APPEALS TO MAINE SUPERIOR COURT

Maine law allows aggrieved persons to appeal final Commissioner licensing decisions to Maine's Superior Court, see 38 M.R.S.A. § 346(1); 06-096 CMR 2.26; 5 M.R.S.A. § 11001; & MRCivP 80C. Parties to the licensing decision must file a petition for review within 30 days after receipt of notice of the Commissioner's written decision. A petition for review by any other person aggrieved must be filed within 40-days from the date the written decision is rendered. The laws cited in this paragraph and other legal procedures govern the contents and processing of a Superior Court appeal.

ADDITIONAL INFORMATION

If you have questions or need additional information on the appeal process, contact the DEP's Director of Procedures and Enforcement at (207) 287-2811.

Note: The DEP provides this INFORMATION SHEET for general guidance only; it is not intended for use as a legal reference. Maine law governs an appellant's rights.
